

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

(19) 日本国特許庁 (J P)

(12) 公開特許公報 (A)

(11) 特許出願公開番号

特開2000-56294

(P2000-56294A)

(43) 公開日 平成12年2月25日 (2000.2.25)

(51) Int.Cl. ⁷	識別記号	F I	テマコード* (参考)
G 0 2 F 1/133	5 7 5	G 0 2 F 1/133	5 7 5
	5 3 5		5 3 5

審査請求 未請求 請求項の数10 O L (全 25 頁)

(21) 出願番号 特願平11-23716

(22) 出願日 平成11年2月1日 (1999.2.1)

(31) 優先権主張番号 特願平10-23656

(32) 優先日 平成10年2月4日 (1998.2.4)

(33) 優先権主張国 日本 (J P)

(31) 優先権主張番号 特願平10-96497

(32) 優先日 平成10年4月8日 (1998.4.8)

(33) 優先権主張国 日本 (J P)

(31) 優先権主張番号 特願平10-157622

(32) 優先日 平成10年6月5日 (1998.6.5)

(33) 優先権主張国 日本 (J P)

(71) 出願人 000002369
セイコーエプソン株式会社
東京都新宿区西新宿2丁目4番1号

(72) 発明者 前田 強
長野県諏訪市大和3丁目3番5号 セイコーエプソン株式会社内

(72) 発明者 岡本 英司
長野県諏訪市大和3丁目3番5号 セイコーエプソン株式会社内

(74) 代理人 100093388
弁理士 鈴木 喜三郎 (外2名)


最終頁に続く

(54) 【発明の名称】 液晶装置及び電子機器


(57) 【要約】

【課題】 反射型表示と透過型表示とを切換え可能な液晶装置において、視差による二重映りや表示のにじみの発生を抑え、反射型表示時にも透過型表示時にも高コントラストで高品位の画像表示を可能とする。

【解決手段】 暗所でバックライト15を点灯すると、光源光は偏光板12、位相差板14を介して半透過反射板7を通過するので、液晶層3内に導入され、透過型表示が行われる。明所で偏光板11、位相差板13、液晶層3を介して入射した外光は、半透過反射板7で反射されるので、反射型表示が行われる。駆動電圧に対する反射率特性及び透過率特性に最適な駆動電圧が液晶に印加されるように、反射型表示時と透過型表示時とで駆動電圧が切り換えられる。

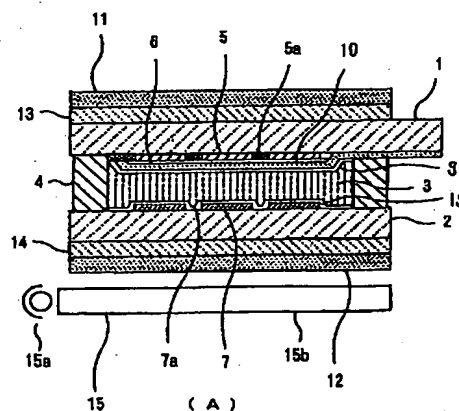

(A)

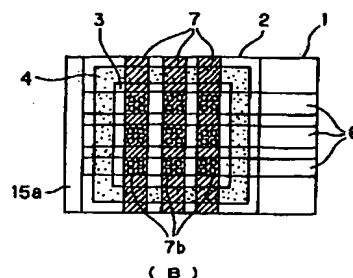

(B)

(2)

【特許請求の範囲】

【請求項1】 透明な一对の第1及び第2基板と、
 該第1及び第2基板間に挟持された液晶層と、
 前記第1基板の前記液晶層側の面に形成された透明な第1電極と、
 前記第2基板の前記液晶層側の面に形成された半透過反射層からなる第2電極と、
 前記第2基板の前記液晶層と反対側に配置された照明装置と、
 該照明装置の点灯時と非点灯時とで前記第1及び第2電極を介して前記液晶層に印加される液晶駆動電圧が同一画像に対して相異なるように前記第1及び第2電極を駆動する駆動手段とを備えたことを特徴とする液晶装置。

【請求項2】 透明な一对の第1及び第2基板と、
 該第1及び第2基板間に挟持された液晶層と、
 前記第1基板の前記液晶層側の面に形成された透明な第1電極と、
 前記第2基板の前記液晶層側の面に形成された半透過反射層と、
 該半透過反射層と前記液晶層との間に形成された透明な第2電極と、
 前記第2基板の前記液晶層と反対側に配置された照明装置と、
 該照明装置の点灯時と非点灯時とで前記第1及び第2電極を介して前記液晶層に印加される液晶駆動電圧が同一画像に対して相異なるように前記第1及び第2電極を駆動する駆動手段とを備えたことを特徴とする液晶装置。

【請求項3】 前記半透過反射層は、各画素内に前記照明装置からの光が透過可能な開口部が設けられた反射膜からなることを特徴とする請求項1又は2に記載の液晶装置。

【請求項4】 前記駆動手段は、
 前記第1電極に電圧を供給する第1供給手段と、
 該第1供給手段が供給する電圧を前記非点灯に応じて反射型表示用の設定に切り換え且つ前記点灯に応じて透過型表示用の設定に切り換えるように前記第1供給手段を制御する第1制御手段とを備えたことを特徴とする請求項1から3のいずれか一項に記載の液晶装置。

【請求項5】 前記照明装置における前記点灯と前記非点灯とを切り換える点灯切換手段を更に備えており、
 該点灯切換手段による切り換え動作に同期して前記第1制御手段は、前記第1供給手段が供給する電圧を反射型表示用の設定又は透過型表示用の設定に切り換えることを特徴とする請求項4に記載の液晶装置。

【請求項6】 前記駆動手段は、
 前記第2電極に電圧を供給する第2供給手段と、
 該第2供給手段が供給する電圧を前記非点灯に応じて反射型表示用の設定に切り換え且つ前記点灯に応じて透過型表示用の設定に切り換えるように前記第2供給手段を制御する第2制御手段とを備えたことを特徴とする請求

項1から5のいずれか一項に記載の液晶装置。

【請求項7】 前記第2供給手段は、階調データの示す階調レベルに応じた大きさの実効値を有する電圧を前記第2電極に供給し、

前記第2制御手段は、各階調レベルに対する前記実効値の各大きさの設定を、前記非点灯に応じて反射型表示用の設定に切り換え且つ前記点灯に応じて透過型表示用の設定に切り換えるように前記第2供給手段を制御することを特徴とする請求項6に記載の液晶装置。

【請求項8】 前記半透過反射層と前記第1基板との間に、カラーフィルタを更に備えたことを特徴とする請求項1から7のいずれか一項に記載の液晶装置。

【請求項9】 前記半透過反射層が凹凸を有することを特徴とする請求項1から8のいずれか一項に記載の液晶装置。

【請求項10】 請求項1から9のいずれか一項に記載の液晶装置を備えたことを特徴とする電子機器。

【発明の詳細な説明】

【0001】

【発明の属する技術分野】本発明は、液晶装置の技術分野に属し、特に、反射型表示と透過型表示とを切り換えて表示することのできる液晶装置及びこの液晶装置を用いた電子機器の技術分野に属する。

【0002】

【従来の技術】従来、反射型液晶装置は消費電力が小さいために携帯機器や装置の付属的表示部などに多用されているが、外光を利用して表示を視認可能にしているため、暗い場所では表示を読みとることができないという問題点があった。このため、明るい場所では通常の反射型液晶装置と同様に外光を利用するが、暗い場所では内部の光源により表示を視認可能にした形式の液晶装置が提案されている。これは、特開昭57-049271号公報、特開昭57-049271号公報、特開昭57-049271号公報などに記載されているように、液晶パネルの観察側と反対側の外面に偏光板、半透過反射板、バックライトを順次配置した構成をしている。この液晶装置では、周囲が明るい場合には外光を取り入れて半透過反射板にて反射された光を利用して反射型表示を行い、周囲が暗くなるとバックライトを点灯して半透過反射板を透過させた光により表示を視認可能とした透過型表示を行う。

【0003】別の液晶装置としては、反射型表示の明るさを向上させた特開平8-292413号公報に記載されたものがある。この液晶装置は、液晶パネルの観察側と反対側の外面に半透過反射板、偏光板、バックライトを順次配置した構成をしている。周囲が明るい場合には外光を取り入れて半透過反射板にて反射された光を利用して反射型表示を行い、周囲が暗くなるとバックライトを点灯して偏光板と半透過反射板を透過させた光により表示を視認可能とした透過型表示を行う。このような構

(3)

3

成にすると、液晶セルと半透過反射板の間に偏光板がないため、前述した液晶装置よりも明るい反射型表示が得られる。

【0004】

【発明が解決しようとする課題】しかしながら、上記特開平8-292413号公報に記載された液晶装置では、液晶層と半透過反射板との間に透明基板が介在するため、二重映りや表示のにじみなどが発生してしまうという問題点がある。

【0005】更に、近年の携帯機器やOA機器の発展に伴って液晶表示のカラー化が要求されるようになっており、反射型液晶装置を用いるような機器においてもカラー化が必要な場合が多い。ところが、上記公報に記載されている液晶装置とカラーフィルタを組み合わせた方法では、半透過反射板を液晶パネルの後方に配置しているため、液晶層やカラーフィルタと半透過反射板との間に液晶パネルの厚い透明基板が介在し、視差によって二重映りや表示のにじみなどが発生してしまい、十分な発色を得ることができないという問題点がある。

【0006】この問題を解決するために、特開平9-258219号公報では、液晶層と接するように反射板を配置する反射型カラー液晶装置が提案されている。しかしながら、この液晶装置では、周囲が暗くなると表示を認識することができない。

【0007】他方、特開平7-318929号公報では、液晶セルの内面に半透過反射膜を兼ねる画素電極を設けた半透過反射型の液晶装置が提案されている。しかしながら、この液晶装置では、同一の駆動装置（例えば、所謂Xドライバ回路やYドライバ回路）を用いて反射型表示時も透過型表示時も液晶駆動が行われ、同一の画像データに対応する駆動電圧は、反射型表示時でも透過型表示時でも一定である。しかしながら、本願発明者らの研究によれば、一般にこの種の半透過反射型の液晶装置においては反射型表示時における液晶駆動電圧に対する反射率の特性と透過型表示時における液晶駆動電圧に対する透過率の特性とは一致していない。この結果、特開平7-318929号公報等の液晶装置では、駆動装置において反射型表示時に良好なコントラストや表示濃度が得られるように画像データの階調に対する液晶駆動電圧の設定を行うと、透過型表示時には良好なコントラストや表示濃度は得られない。逆に、駆動装置において透過型表示時に良好なコントラストや表示濃度が得られるように画像データの階調に対する液晶駆動電圧の設定を行うと、今度は反射型表示時には良好なコントラストや表示濃度は得られないという問題点がある。

【0008】本発明は上述の問題点に鑑みなされたものであり、反射型表示と透過型表示とを切換え可能な液晶装置において、視差による二重映りや表示のにじみなどが発生せず、反射型表示時にも透過型表示時にも高コントラストで高品位の画像表示が可能な半透過反射型の液

4

晶装置及びその液晶装置を用いた電子機器を提供することを課題とする。

【0009】

【課題を解決するための手段】本発明の第1の液晶装置は上記課題を解決するために、透明な一对の第1及び第2基板と、該第1及び第2基板間に挟持された液晶層と、前記第1基板の前記液晶層側の面に形成された透明な第1電極と、前記第2基板の前記液晶層側の面に形成された半透過反射層からなる第2電極と、前記第2基板の前記液晶層と反対側に配置された照明装置と、該照明装置の点灯時と非点灯時とで前記第1及び第2電極を介して前記液晶層に印加される液晶駆動電圧が同一画像に対して相異なるように前記第1及び第2電極を駆動する駆動手段とを備えたことを特徴とする。

【0010】本発明の第1液晶装置によれば、反射型表示時には、半透過反射層（第2電極）は、第1基板側から入射した外光を液晶層側に反射する。この際、半透過反射層（第2電極）は、第2基板の液晶層側に配置されているため、液晶層と半透過反射層（第2電極）との間に間隙が殆どなく、そのため視差に起因する表示の二重映りや表示のにじみが発生しない。他方、透過型表示時には、照明装置から発せられ第2基板側から入射した光源光を、半透過反射層（第2電極）を介して液晶層側に透過する。従って、暗所では光源光を用いて明るい表示が可能となる。

【0011】特に駆動手段により、照明装置の点灯時と非点灯時とでは、第1及び第2電極を介して液晶層に印加される液晶駆動電圧が同一画像に対して相異なるように第1及び第2電極が駆動される。即ち、一般に半透過反射型の液晶装置では反射型表示時における液晶駆動電圧に対する反射率の特性と透過型表示時における液晶駆動電圧に対する透過率の特性とは一致していないため、本発明のように液晶駆動電圧を相異ならしめることにより、照明装置を非点灯した反射型表示時に当該反射型表示における駆動電圧に対する反射率特性に適合した駆動電圧により液晶を駆動しつつ、照明装置を点灯した透過型表示時に当該透過型表示における駆動電圧に対する透過率特性に適合した駆動電圧により液晶を駆動することが可能となる。特に、白表示と黒表示の中間調表示をするための液晶印加電圧のレベルを反射型表示と透過型表示で変えることは非常に有用である。

【0012】本発明の第2の液晶装置は上記課題を解決するために、透明な一对の第1及び第2基板と、該第1及び第2基板間に挟持された液晶層と、前記第1基板の前記液晶層側の面に形成された透明な第1電極と、前記第2基板の前記液晶層側の面に形成された半透過反射層と、該半透過反射層と前記液晶層との間に形成された透明な第2電極と、前記第2基板の前記液晶層と反対側に配置された照明装置と、該照明装置の点灯時と非点灯時とで前記第1及び第2電極を介して前記液晶層に印加さ

50

(4)

5

れる液晶駆動電圧が同一画像に対して相異なるように前記第1及び第2電極を駆動する駆動手段とを備えたことを特徴とする。

【0013】本発明の第2液晶装置によれば、反射型表示時には、半透過反射層は、第1基板側から入射した外光を液晶層側に反射する。この際、半透過反射層は、第2基板の液晶層側に配置されているため、液晶層と半透過反射層との間に間隙が殆どなく、そのため視差に起因する表示の二重映りや表示のにじみが発生しない。他方、透過型表示時には、照明装置から発せられ第2基板側から入射した光源光を、半透過反射層を介して液晶層側に透過する。従って、暗所では光源光を用いて明るい表示が可能となる。

【0014】特に駆動手段により、照明装置の点灯時と非点灯時とは、第1及び第2電極を介して液晶層に印加される液晶駆動電圧が同一画像に対して相異なるように第1及び第2電極が駆動される。これにより上述した本発明の第1の液晶装置の場合と同様に、照明装置を非点灯した反射型表示の際に当該反射型表示における駆動電圧に対する反射率特性に適合した駆動電圧により液晶を駆動しつつ照明装置を点灯した透過型表示の際に当該透過型表示における駆動電圧に対する反射率特性に適合した駆動電圧により液晶を駆動することが可能となる。

【0015】なお、第1及び第2液晶装置の駆動方式としては、パッシブマトリクス駆動方式、TFT (Thin Film Diode) アクティブマトリクス駆動方式、TFD (Thin Film Diode) アクティブマトリクス駆動方式、セグメント駆動方式等の公知の各種駆動方式を採用可能である。また、表示モードとしては、ノーマリーブラックモードでもノーマリーホワイトモードのいずれでもよいが、前者を採用すれば、非駆動時には液晶装置が暗状態となるように駆動するので、透過型表示時に液晶が駆動されない画素間またはドット間からの光漏れを抑えることができ、コントラストが高い透過型表示を得ることができる。また、反射型表示時に、画素間やドット間からの表示に不要な反射光を抑えることができるので、コントラストが高い表示を得ることができる。

【0016】本発明の第1及び第2の液晶装置の一の態様では夫々、前記半透過反射層は、各画素内に前記照明装置からの光が透過可能な開口部が設けられた反射膜からなる。

【0017】この態様によれば、半透過反射層に設けられた開口部を介して、照明装置からの光が各画素について透過可能であるので、照明装置を利用した透過型表示が可能となる。また、開口部から外れた反射膜部分により、液晶を介して外光を反射するので、外光を利用した反射型表示が可能となる。なお、このような開口部としては例えば、反射膜の表面に規則的に配列された又は不規則に点在された矩形のスリットや微細な開口、孔欠陥、凹入欠陥等でもよい。若しくは、反射膜をストライ

6

ブ状や島状に複数形成して、相隣接する反射膜の間隙を開口部として光が透過するように構成してもよい。また、反射膜の材料としては、Al (アルミニウム) が主成分の金属が用いられるが、Cr (クロム) やAg (銀) などの可視光領域の外光を反射させることのできる金属であれば、その材料は特に限定されるものではない。例えば、95重量%以上のAlを含み、かつ層厚が10nm以上40nm以下であるように反射膜を構成すれば、透過率が1%以上40%以下であり、反射率が50%以上95%以下である半透過反射型の反射電極が作製できる。

【0018】他方、開口部の径は、0.01 μ m以上20 μ m以下であることが好ましい。このようにすることで、人間が認識することが困難であり、開口部を設けたことで生じる表示品質の劣化を抑えつつ、反射型表示と透過型表示を同時に実現できる。また、開口部は反射膜に対して、5%以上30%以下の面積比で形成することが好ましい。このようにすることで、反射型表示の明るさの低下を抑えることができると共に、反射膜の開口部を介して液晶層に導入される光によって透過型表示が実現できる。このような開口部はレジストを用いたフォト工程/現像工程/剥離工程で容易に作製することができる。

【0019】特に、本発明の第1の液晶装置の場合には、このような反射膜からなる半透過反射層(第2電極)が外光を反射する機能と液晶に電圧を印加する機能との両方を有するので、反射膜と画素電極とを別途形成する場合と比較して、装置構成上も製造上或いは設計上も有利であり、低コスト化を図れる。他方、本発明の第1の液晶装置の場合には、透明な第2電極に開口部を設ける必要がないため、当該第2電極についての装置信頼性や製造歩留まりが高まる。

【0020】本発明の第1及び第2の液晶装置の他の態様では夫々、前記駆動手段は、前記第1電極に電圧を供給する第1供給手段と、該第1供給手段が供給する電圧を前記非点灯に応じて反射型表示用の設定に切り換え且つ前記点灯に応じて透過型表示用の設定に切り換えるように前記第1供給手段を制御する第1制御手段とを備える。

【0021】この態様によれば、第1供給手段(例えば、Yドライバ回路)により、第1電極(例えば、走査線)に電圧が供給されるが、第1制御手段による制御の下、この供給される電圧は、照明装置の非点灯に応じて、反射型表示用の設定に切り換えられ、他方で照明装置の点灯に応じて透過型表示用の設定に切り換えられる。従って、反射型表示時及び透過型表示時に、駆動電圧に対する反射率特性及び透過率特性に夫々適合した駆動電圧により液晶を駆動できる。

【0022】この態様では、前記照明装置における前記点灯と前記非点灯とを切り換える点灯切換手段を更に備

50

7

えており、該点灯切換手段による切り換え動作に同期して前記第1制御手段は、前記第1供給手段が供給する電圧を反射型表示用の設定又は透過型表示用の設定に切り換えるように構成してもよい。

【0023】本発明の第1及び第2の液晶装置の他の態様では夫々、前記駆動手段は、前記第2電極に電圧を供給する第2供給手段と、該第2供給手段が供給する電圧を前記非点灯に応じて反射型表示用の設定に切り換え且つ前記点灯に応じて透過型表示用の設定に切り換えるように前記第2供給手段を制御する第2制御手段とを備える。

【0024】この態様によれば、第2供給手段（例えば、Xドライバ回路）により、第1電極（例えば、データ線）に電圧が供給されるが、第1制御手段による制御の下、この供給される電圧は、照明装置の非点灯に応じて、反射型表示用の設定に切り換えられ、他方で照明装置の点灯に応じて透過型表示用の設定に切り換えられる。従って、反射型表示時及び透過型表示時に、駆動電圧に対する反射率特性及び透過率特性に夫々適合した駆動電圧により液晶を駆動できる。

【0025】この態様では、前記第2供給手段は、階調データの示す階調レベルに応じた大きさの実効値を有する電圧を前記第2電極に供給し、前記第2制御手段は、各階調レベルに対する前記実効値の各大きさの設定を、前記非点灯に応じて反射型表示用の設定に切り換え且つ前記点灯に応じて透過型表示用の設定に切り換えるように前記第2供給手段を制御してよい。

【0026】このように構成すれば、第2制御手段による制御の下、各階調レベルに対する実効値の各大きさの設定は、非点灯に応じて反射型表示用の設定に切り換えられ、他方照明装置の点灯に応じて透過型表示用の設定に切り換えられる。そして、第2供給手段により階調データの示す階調レベルに応じた大きさの実効値を有する電圧が前記第2電極に供給される。従って、特に階調全域に渡って良好な駆動電圧により液晶を駆動できる。

【0027】本発明の第1及び第2の液晶装置の他の態様では夫々、前記半透過反射層と前記第1基板との間に、カラーフィルタを更に備える。

【0028】この態様によれば、外光による反射型カラー表示と照明装置を利用した透過型カラー表示を行うことができる。カラーフィルタは、380nm以上780nm以下の波長範囲のすべての光に対して25%以上の透過率を有しているのが好ましい。このようにすることで、明るい反射型カラー表示と透過型カラー表示を実現できる。

【0029】本発明の第1及び第2の液晶装置の他の態様では夫々、前記半透過反射層が凹凸を有する。

【0030】この態様によれば、反射電極の鏡面感を凸凹によってなくし、散乱面（白色面）に見せることができる。また、凹凸による散乱によって、広視野角の表示

(5)

8

が可能となる。この凹凸形状は、反射電極の下地に感光性のアクリル樹脂等を用いて形成したり、下地のガラス基板自身をフッ酸によって荒らしたりすることによって形成することができる。尚、反射電極の凹凸表面上に透明な平坦化膜を更に形成して、液晶層に面する表面（配向膜を形成する表面）を平坦化しておくことが液晶の配向不良を防ぐ観点から望ましい。

【0031】本発明の電子機器は上記課題を解決するために、上述した本発明の液晶装置を備えたことを特徴とする。

【0032】本発明の電子機器によれば、視差による二重映りや表示のにじみがなく、反射型表示と透過型表示とを切り換えて表示することのできる半透過反射型液晶装置や半透過反射型カラー液晶装置を用いた各種の電子機器を実現できる。このような電子機器は、明るい場所でも暗い場所でも、周囲の外光に関係なく特に高コントラストで高画質の表示を実現できる。

【0033】

【発明の実施の形態】以下、本発明の実施の形態を図面を参照して説明する。

【0034】（第1実施形態）本発明に係る液晶装置の第1実施形態を図1から図7を参照して説明する。図1(a)は、本発明の第1実施形態の構造を示す概略縦断面図であり、図1(b)は、図1(a)に示した第1実施形態の概略平面図であり、図2～図6は夫々、第1実施形態における反射電極に設けられる開口部の各種の具体例を示す拡大平面図であり、図7は、第1実施形態の液晶装置における駆動電圧に対する反射型表示時の反射率Rの特性及び透過型表示時の透過率Tの特性を示す特性図である。図1(b)では、電極配置を見易くするために図1(a)に示したカラーフィルタ及びブラックマトリクス層を省略しており、また、説明の便宜上ストライプ状の電極についても縦横3本ずつのみ示してあるが、実際の液晶装置では遥かに多い数のストライプ状の電極が設けらる。尚、第1実施形態は基本的に単純マトリクス型の液晶表示装置に関するものであるが、同様の構成によりアクティブマトリクス型の装置や他のセグメント型の装置、その他の液晶装置にも適用することは可能である。

【0035】図1(a)及び図1(b)に示すように、第1実施形態では、2枚の透明基板1及び2の間に液晶層3が枠状のシール材4によって封止された液晶セルが形成されている。液晶層3は、所定のツイスト角を持つネマチック液晶で構成されている。前方の透明基板1の内面上にはカラーフィルタ5が形成され、このカラーフィルタ5には、R（赤）、G（緑）、B（青）の3色の着色層が所定パターンで配列されている。カラーフィルタ5の表面上には透明な保護膜10が被覆されており、保護膜10の表面上に複数のストライプ状の透明電極6がITO（Indium TinOxide）膜などにより形成されている。透明電極6の表面上には配向膜9が形成され、所定方向

(6)

9

にラビング処理が施されている。

【0036】一方、後方の透明基板2の内面上には、上記カラーフィルタ5の着色層毎に形成されたストライプ状の反射電極7が上記透明電極6と交差するように複数配列されている。TFD素子やTFT素子を備えたアクティブマトリクス型の装置である場合には、各反射電極7は矩形状に形成され、アクティブ素子を介して配線に接続される。この反射電極7はCrやAlなどにより形成され、その表面は透明基板1の側から入射する光を反射する反射面となっている。反射電極7の表面上には上記と同様の配向膜19が形成される。反射電極7には、2 μ m径の開口部7b(図1(b)参照)が多数設けてあり、開口部7bの総面積は反射電極7の総面積に対して約10%の割合で設けてある。

【0037】ここで図2～図6を参照して、反射電極7及び開口部7bの各種の具体例について説明する。

【0038】先ず図2に示すように、上側の透明基板に形成されたストライプ状の透明電極802(図1の透明電極6に対応)に対向して、下側の透明基板上に形成されたストライプ状の反射電極802(図1の反射電極7に対応)に、矩形のスリット803(図1の開口部7bに対応)が形成されてもよい。なお、矩形のスリット803は、正方形でも長方形でも、その他の多角形や円形でもよい。更に、配置や向きについても、各ドット(即ち図2中、透明電極801と反射電極802とが交差する領域)内に少なくとも一つの開口部が設けられていれば、規則正しく配列されてもよいし、不規則に点在されてもよい。

【0039】図3に示すように、上側の透明基板に形成されたストライプ状の透明電極601(図1の透明電極6に対応)に対向して、下側の透明基板上に形成されたストライプ状の反射電極602(図1の反射電極7に対応)に、不規則に点在する孔欠陥、凹入欠陥等の微細な欠陥部603(図1の開口部7bに対応)が形成されてもよい。

【0040】図4に示すように、上側の透明基板に形成されたストライプ状の透明電極301(図1の透明電極6に対応)に対向して、下側の透明基板上に形成されたストライプ状の反射電極303(図1の反射電極7に対応)を所定の間隙303(図1の開口部7bに対応)を隔てて配置してもよい。即ち、この間隙303を介してバックライト15からの光を液晶層3に導入する。

【0041】ここで第1実施形態は単純(パッシブ)マトリクス型液晶装置に係るものであるが、例えば後述するTFDアクティブマトリクス駆動方式の半透過反射型の液晶装置の場合には、図4の具体例と同様の考え方から、図5に示すように、上側の透明基板に形成されたストライプ状の透明電極201(図1の透明電極6に対応)に対向して、下側の透明基板上に各ドット毎に形成された島状の反射電極204(図1の反射電極7に対

10

応)を所定の間隙205(図1の開口部7bに対応)を隔てて配置してもよい。即ち、この間隙205を介してバックライト15からの光を液晶層3に導入する。尚、この場合には、下側透明基板上には走査線202が形成され、さらに各ドットに対応してTFD素子203が形成されて、TFD素子203を介して走査線202と反射電極204とが接続されている。

【0042】更に、例えば後述するTFTアクティブマトリクス駆動方式の半透過反射型の液晶装置の場合には、図4の具体例と同様の考え方から、図6に示すように、上側の透明基板に形成された透明電極1401(図1の透明電極6に対応)に対向して、下側の透明基板上に各ドット毎に形成された島状の反射電極1405(図1の反射電極7に対応)を所定の間隙1406(図1の開口部7bに対応)を隔てて配置してもよい。即ち、この間隙1406を介してバックライト15からの光を液晶層3に導入する。尚、この場合には、下側透明基板上にはデータ線1402及び走査線1403が形成され、さらに各ドットに対応してTFT素子1404が形成されて、TFT素子1404を介してデータ線1402及び走査線1403と反射電極1405とが接続されている。

【0043】再び図1(a)及び図1(b)に示すように、前方の透明基板1の外面上に偏光板11が配置され、偏光板11と透明電極1との間に位相差板13が配置されている。また、液晶セルの後方には、透明基板2の背後に位相差板14が配置され、この位相差板14の背後に偏光板12が配置されている。そして、偏光板12の後方には、白色光を発する蛍光管15aと、この蛍光管15aに沿った入射端面を備えた導光板15bとを有するバックライト15が配置されている。導光板15bは裏面全体に散乱用の粗面が形成され、或いは散乱用の印刷層が形成されたアクリル樹脂板などの透明体であり、光源である蛍光管15aの光を端面にて受けて、図の上面からほぼ均一な光を放出するように構成されている。その他のバックライトとしては、LED(発光ダイオード)やEL(エレクトロルミネセンス)などを用いることができる。

【0044】第1実施形態では、透過型表示のときに各反射電極7の間の領域7aから光が漏れるのを防ぐために、カラーフィルタ5の各着色層の間に形成された遮光部であるブラックマトリクス層5aが平面的にほぼ対応して設けられている。ブラックマトリクス層5aはCr層を被着したり、感光性ブラック樹脂で形成する。

【0045】次に以上のように構成された第1実施形態の動作について説明する。

【0046】先ず、反射型表示について説明する。外光は図1における偏光板11、位相差板13、カラーフィルタ5をそれぞれ透過し、液晶層3を通過後、反射電極7によって反射され、再び偏光板11から出射される。

(7)

11

このとき、液晶層3への印加電圧に応じて、偏光板11の透過（明状態）及び吸収（暗状態）並びにそれらの中間の明るさを制御する。

【0047】次に、透過型表示について説明する。バックライト15からの光は偏光板12及び位相差板14によって所定の偏光となり、反射電極7の開口部7bより液晶層3に導入され、液晶層3を通過後、カラーフィルタ5、位相差板13をそれぞれ透過する。このとき、液晶層3への印加電圧に応じて、偏光板11の透過（明状態）及び吸収（暗状態）並びにそれらの中間の明るさを制御する。

【0048】ここで、図7に示したように、第1実施形態の如き半透過反射型の液晶装置においては一般に、駆動電圧に対する反射型表示時の反射率Rの特性と透過型表示時の透過率Tの特性とは、相異なるものであることが本願発明者らによる研究及び実験の結果判明している。即ち、仮にバックライト15の点灯と非点灯とによらずに、同一画像に対して、一定の駆動電圧でこの種の半透過反射型の液晶装置を駆動しようとするれば、反射型表示時及び透過型表示時のどちらか一方についてしか、高階調表示を行うため或いはコントラストを高めるために図7に示した如き特性曲線のスロープを最大限に利用することができないことになる。しかるに、本実施形態では、バックライト15の点灯時と非点灯時とでは、透明電極6と反射電極7を介して液晶層3に印加される液晶駆動電圧が同一画像に対して相異なるように、透明電極6と反射電極7が駆動される。即ち、本実施形態では、バックライト15を非点灯した反射型表示時には、図7に示したような反射率Rの特性に適合した駆動電圧により液晶層3が駆動され、バックライト15を点灯した透過型表示時には、図7に示したような透過率Tの特性に適合した駆動電圧により液晶が駆動される。特に、白表示と黒表示の中間調表示をするための液晶印加電圧のレベルを反射型表示と透過型表示で変えることは非常に有用である。これらの反射率Rの特性に適合する駆動電圧の設定及び透過率Tの特性に適合する駆動電圧の設定は夫々、個々の液晶装置について各駆動電圧毎の反射率Rの特性及び透過率Tの特性を予め実験的、経験的、理論的に求めておくことにより比較的容易に行われる。尚、このような駆動を行う駆動装置の具体的な構成については第3実施形態として詳述する。

【0049】上述した本実施形態によれば、二重映りや表示のにじみのない反射型表示と透過型表示とを切り換えて表示することができ、特に反射型表示と透過型表示とのいずれにおいても高コントラストで高品位のカラー液晶装置が実現できる。

【0050】尚、第1実施形態によれば、偏光板11及び12により反射型表示と透過型表示とのいずれにおいても良好な表示制御ができる。そして、位相差板13により反射型表示時における光の波長分散に起因する色付

12

きなどの色調への影響を低減すると共に、位相差板14により透過型表示時における光の波長分散に起因する色付きなどの色調への影響を低減することが可能となる。また、位相差板13及び14については、液晶セルの着色補償、もしくは視角補償によりそれぞれの位置に複数枚位相差板を配置することも可能である。

【0051】更に、上述した本実施形態では、反射電極7を平坦ではなく、例えば高低差が約0.8 μm の凹凸を有するように構成してもよい。このように構成すれば、反射電極17の鏡面感を凸凹によってなくし散乱面（白色面）に見せることができ、凹凸による散乱によって広視野角の表示が可能となる。他方、位相差板13と透明基板1との間に、アクリル樹脂などの透明基体中に屈折率の異なる透明な粒子を分散させた内部拡散形のものや、透明基体の表面を粗面化（マット化）した表面拡散形のものからなる透過型の光拡散板を配置してもよい。このように構成すれば、反射電極7の直接反射による外光の映り込みを防止し、視認性を向上させることができる。更に、反射電極7に、蒸着やスパッタリング、フォトリソグラフィ工程等を利用して微細な細孔を多数形成してもよく、これにより透過型表示を行う際に表示を明るくでき、反射型表示を行う際に外光の映り込みを防止できる。

【0052】（第2実施形態）本発明に係る液晶装置の第2実施形態を図8及び図9を参照して説明する。図8は、本発明の第2実施形態の構造を示す概略縦断面図であり、図9(a)は、第2実施形態に係る反射電極の一例を示す拡大平面図であり、図9(b)は、この反射電極の他の例を示す拡大平面図である。図8中、図1に示した第1実施形態と同じ構成要素については同じ参照符号を付し、その説明は省略する。尚、この実施形態は基本的に単純マトリクス型の液晶表示装置に関するものであるが、同様の構成によりアクティブマトリクス型の装置や他のセグメント型の装置、その他の液晶装置にも適用することは可能である。

【0053】図8に示すように、第2実施形態では、第1実施形態と比べると、下側基板上の第2電極が開口部を有する単一層の反射電極ではなく、開口部を有する半透過反射板上に設けられた透明電極からなる（即ち、第1電極は電極機能のみを果たし、別途設けられた反射膜が半透過反射機能を果たす）点が異なり、更に、カラーフィルタ及びブラックマトリクス層が下側基板上に設けられている点等が主に異なる。その他の構成については基本的に第1実施形態の場合と同様である。

【0054】即ち図8に示すように、透明基板1側では、配向膜19には所定方向にラビング処理が施されており、液晶分子はラビング方向に約85度のプレティルト角を有している。TFD素子やTFE素子を備えたアクティブマトリクス型の装置である場合には、透明電極6は矩形状に形成され、アクティブ素子を介して配線に

(8)

13

接続される。

【0055】一方、下側の透明基板2の内面上には、感光性のアクリル樹脂によって高低さ約 $0.8\mu\text{m}$ の凹凸が形成されており、その表面上に1.0重量%のNdを添加したAlを25nmの厚みでスパッタし、半透過反射板411が形成されている。半透過反射板411上には、保護膜412を介して、カラーフィルタ414が形成され、このカラーフィルタ414には、R(赤)、G(緑)、B(青)の3色の着色層が所定パターンで配列されている。カラーフィルタ414の表面上には透明な保護膜が被覆されており、この保護膜の表面上に複数のストライプ状の透明電極416がITOなどにより形成されている。カラーフィルタ414の着色層毎に形成されたストライプ状の透明電極416が上記透明電極6と交差するように複数配列されている。透明電極416の表面上には上記と同様の配向膜19が形成される。なお、この配向膜19にはラビング処理を施さない。位相差板13及び14として、特に1/4波長板が夫々用いられる。

【0056】更に第2実施形態では、偏光板11と偏光板12の透過軸P1及びP2は同方向に設定されている。これらの偏光板11及び12の透過軸P1及びP2に対して、位相差板(即ち、1/4波長板)13及び14の遅相軸C1及びC2の方向は夫々、 $\theta=45$ 度時計方向に回転した方向に設定されている。さらに、透明基板1の内面上の配向膜9のラビング処理の方向R1もまた、位相差板(即ち、1/4波長板)13及び14の遅相軸C1及びC2の方向と一致する方向に施されている。このラビング方向R1は、液晶層3の電界印加時における倒れる方向を規定する。液晶層3には、誘電異方性が負のネマティック液晶を用いる。

【0057】更に第2実施形態では、透過型表示のときに各ドット間の領域から光が漏れるのを防ぐために、カラーフィルタ414の各着色層の間に形成された遮光部であるブラックマトリクス層413が平面的にほぼ対応して設けられている。ブラックマトリクス層413はCr層を被着したり、感光性ブラック樹脂で形成する。

【0058】以上のように構成された第2実施形態の液晶装置における駆動電圧に対する反射型表示時の反射率Rの特性と透過型表示時の透過率Tの特性とは、図7に示した第1実施形態の場合と同様の傾向を示す。尚、第2実施形態の液晶装置を駆動する際には、電界無印加時の表示状態は暗(黒)である。このようにノーマリーブラックモードで駆動すれば、液晶が駆動されない透明電極416の間隙からの光漏れや不要な反射光を抑えることができるので、ブラックマトリクス層413を形成する必要がなくなる。

【0059】次に以上のように構成された第2実施形態の動作について説明する。

【0060】先ず、反射型表示について説明する。外光

14

は図8における偏光板11、位相差板13をそれぞれ透過し、液晶層3を通過後、カラーフィルタ414を通過し半透過反射板411によって反射され、再び偏光板11から出射される。このとき、液晶層3への印加電圧に応じて、偏光板11の透過(明状態)及び吸収(暗状態)並びにそれらの中間の明るさを制御する。

【0061】次に、透過型表示について説明する。バックライト15からの光は偏光板12及び位相差板14によって所定の偏光(円偏光、楕円偏光又は直線偏光)となり、半透過反射板411より液晶層3に導入され、液晶層3を通過後、位相差板13を透過する。このとき、液晶層3への印加電圧に応じて、偏光板11の透過(明状態)と吸収(暗状態)、及びその中間の明るさを制御することができる。

【0062】ここで、第1実施形態の場合と同様に、第2実施形態においても、バックライト15の点灯時と非点灯時とは、透明電極6と透明電極416を介して液晶層3に印加される液晶駆動電圧が同一画像に対して相異なるように、透明電極6と透明電極416が駆動される。即ち、本実施形態では、バックライト15を非点灯した反射型表示時には、図7に示したような反射率Rの特性に適合した駆動電圧により液晶層3が駆動され、バックライト15を点灯した透過型表示時には、図7に示したような透過率Tの特性に適合した駆動電圧により液晶が駆動される。尚、このような駆動を行う駆動装置の具体的な構成については第3実施形態として詳述する。

【0063】上述した本実施形態によれば、二重映りや表示のにじみのない反射型表示と透過型表示とを切り換えて表示することができ、特に反射型表示と透過型表示とのいずれにおいても高コントラストで高品位のカラー液晶装置が実現できる。

【0064】また、第2実施形態の半透過反射板411にはAlが主成分の金属層を用いて、この表面を保護膜で覆い、その上にカラーフィルタ層や保護膜、透明電極を形成している。このため、Al金属層が直接ITO現像液やカラーフィルタ現像液と触れることがないので、Al金属層が現像液で溶解することがない。さらに、傷がつきやすいAl金属層を取り扱いやすくすることができる。1.0重量%のNdを添加した25nm厚のAlは、反射率80%及び透過率10%の値を示し、半透過反射板411として十分に機能していることが確認できる。

【0065】また、凹凸を付与した半透過反射板411は、反射光を広角に反射させることができるので、広視野角の液晶装置が実現できる。

【0066】ここで、開口部を有する半透過反射板411及びこの上に設けられる透明電極416についての具体例を図9を参照して説明する。

【0067】先ず第1の具体例では、図9(a)に示すように、上側の透明基板にITO等から形成されたスト

(9)

15

イブ状の透明電極602' (図8の透明電極6に対応) に対向して、下側の透明基板上にA1等からストライプ状で幅W1の反射板602' (図8の半透過反射板411に対応) が複数形成され、更にITO等からストライプ状で反射板602' よりも一回り大きい幅W2 (即ち、 $W2 > W1$) の透明電極603' (図8の透明電極416に対応) が複数形成されている。この結果、各反射板602' 毎に、 $W1 - W1$ の幅の部分が開口部として機能する。即ち、このように平面的に見て反射板602' が形成されておらず且つ透明電極416が形成されている領域をバックライト15からの光が透過可能となり、この領域により透過型表示を行うことが可能となる。他方、このように平面的に見て反射板602' が形成されており且つ透明電極416が形成されている領域を外光が反射可能となり透過可能となり、この領域により反射型表示を行うことが可能となる。

【0068】次に第2の具体例では、図9(b)に示すように、下側の透明基板上にA1等から島状の反射板503 (図8の半透過反射板411に対応) が複数形成され、更にITO等から島状で反射板503よりも一回り大きい透明電極504 (図8の透明電極416に対応) が形成されている。この結果、各反射板503毎に、その周囲の部分が開口部として機能する。即ち、このように平面的に見て反射板503が形成されておらず且つ透明電極504が形成されている領域をバックライト15からの光が透過可能となり、この領域により透過型表示を行うことが可能となる。他方、このように平面的に見て反射板503が形成されており且つ透明電極504が形成されている領域を外光が反射可能となり透過可能となり、この領域により反射型表示を行うことが可能となる。尚、この具体例は、TFDアクティブマトリクス駆動方式用のものであり、各透明電極504は、TFD素子502を介して各走査線501に接続されている。この変形例とほぼ同様に、TFTアクティブマトリクス駆動方式の液晶装置の半透過反射板及び透明電極を下側透明基板上に形成可能である。

【0069】図9を用いて説明した具体例では夫々、画素電極またはドット電極以外に入射した光は、表示に関係がなく、透過型表示のコントラストを低下させるだけであるので、遮光膜 (ブラックマトリクス層) や液晶層の表示モードをノーマリーブラックとすることで、遮断することが好ましい。

【0070】図9(a)の具体例におけるITOからなる透明電極601' のライン幅 (L) を $198 \mu\text{m}$ 、下側基板内面のA1からなる反射層602' のライン幅 (W1) を $46 \mu\text{m}$ 、その上に形成したITOからなる透明電極603' のライン幅 (W2) を $56 \mu\text{m}$ とすると、液晶層に導入された外光のうち約70%を反射し、バックライトから出射し、下側の透明基板に導入された光のうち約10%を透過させることができる。

16

【0071】また、本実施形態のA1反射層はその表面にITO透明電極を形成したので、A1反射層に傷がつきにくくすることができ、またA1反射層とITO透明電極の2つが電極ラインとなるので、電極ラインの低抵抗化が可能となる。

【0072】(第3実施形態) 次に、上述した本発明の第1及び第2実施形態の液晶装置を駆動する駆動回路を含む液晶装置に係る第3実施形態について図10のブロック図を参照して説明する。

【0073】図10において、液晶装置は、バックライト15を内蔵する液晶パネル (上述した第1及び第2実施形態における液晶装置に対応) 103を駆動する駆動装置と、バックライト15を駆動する光源駆動装置108と、バックライト15の点灯・非点灯を切り換える点灯切換装置107とを備えて構成されている。

【0074】駆動装置は特に、液晶パネル103に配線されたデータ線を駆動する第2供給手段の一例としてのXドライバ回路110、Xドライバ回路110の駆動電圧を制御する第2制御手段の一例としてのデータ線駆動制御回路110a、液晶パネル103に配線された走査線を駆動する第1供給手段の一例としてのYドライバ回路100及びYドライバ回路100における走査線駆動電圧を制御する第1制御手段の一例としての走査線駆動制御回路100aを備えて構成されている。データ線駆動制御回路110aは、画像信号Sv及び表示制御信号Ssが外部の画像信号処理回路から入力されると、これらの入力信号に基づいてXドライバ回路110に対してデータ線駆動制御信号S1を出力する。これを受けて、Xドライバ回路110は、画像信号を所定タイミングで各データ線に供給することにより、各データ線を駆動する。走査線駆動制御回路100aは、表示制御信号Ssが外部の画像信号処理回路から入力されると、この入力信号に基づいてYドライバ回路100に対して走査線駆動制御信号S2を出力する。これを受けて、Yドライバ回路100は、走査信号を所定タイミングで各走査線に供給することにより、各走査線を駆動する。

【0075】バックライト15及び光源駆動装置108は、照明装置の一例を構成する。点灯切換装置107からの点灯切換信号SLを受けて、光源駆動装置102は、選択的に光源駆動電圧VLをバックライト15に供給する。これを受けてバックライト15は、前述のように液晶パネル103内の液晶層を半透過反射層を介して照射する。

【0076】点灯切換装置107は、点灯切換手段の一例を構成しており、バックライト15の点灯・非点灯を操作者によるマニュアルスイッチ操作により或いは外光レベルを検出することにより点灯切換信号SLを光源駆動装置108に出力する。即ち、明所では、操作者によるマニュアル操作により又は外光レベルの検出で自動的に、バックライト15を非点灯させる旨の点灯切換信号

(10)

17

SLが光源駆動装置108に出力され、バックライト15は点灯されることなく、外光による反射型表示が行われる。他方、暗所では、操作者によるマニュアル操作により又は外光レベルの検出で自動的に、バックライト15を点灯させる旨の点灯切換信号SLが光源駆動装置108に出力され、光源駆動電圧VLが供給され、バックライト15が点灯されて、透過型表示が行われる。

【0077】本実施例では特に、上述に如きXドライバ回路110、データ線駆動制御回路110a、Yドライバ回路100及び走査線駆動制御回路110aからなる駆動装置は、バックライト15の点灯時と非点灯時とで、点灯切換装置107から出力される点灯切換信号SLに基づいて、走査線及びデータ線を介して液晶層に印加される液晶駆動電圧が同一画像に対して相異なるように、走査線及びデータ線を駆動するように構成されている。

【0078】より具体的には、データ線駆動制御回路110aは、点灯切換装置107から出力される点灯切換信号SLが入力されると、その信号レベルに基づいて、バックライト15の非点灯時には、画像信号Svにより指定される階調レベル（或いは白及び黒レベル）に対してXドライバ回路110がデータ線に供給する画像信号の電圧設定を、例えば図7の如き反射率Rの特性に基づいて、予め設定された反射型表示用に最適化された電圧設定に切り換える。これに代えて又は加えて、走査線駆動制御回路100aは、点灯切換装置107から出力される点灯切換信号SLが入力されると、その信号レベルに基づいて、バックライト15の非点灯時には、Yドライバ回路100が走査線に供給する走査信号の電圧設定を、例えば図7の如き反射率Rの特性に基づいて、予め設定された反射型表示用に最適化された電圧設定に切り換える。更に、データ線駆動制御回路110aは、点灯切換装置107から出力される点灯切換信号SLに基づいて、バックライト15の点灯時には、Xドライバ回路110がデータ線に供給する画像信号の電圧設定を、例えば図7の如き透過率Tの特性に基づいて、予め設定された透過型表示用に最適化された電圧設定に切り換える。これに代えて又は加えて、走査線駆動制御回路100aは、点灯切換装置107から出力される点灯切換信号SLに基づいて、バックライト15の点灯時には、Yドライバ回路100が走査線に供給する走査信号の電圧設定を、例えば図7の如き透過率Tの特性に基づいて、予め設定された透過型表示用に最適化された電圧設定に切り換える。これらの反射型表示用に最適化されたXドライバ回路110における電圧設定、反射型表示用に最適化されたYドライバ回路100における電圧設定、透過型表示用に最適化されたXドライバ回路110における電圧設定及び透過型表示用に最適化されたYドライバ回路100における電圧設定は夫々、液晶装置の種類により定まるものであるため、各液晶装置について予め実

18

験的、理論的、シミュレーション等により求められる。そして、例えば最適化された電圧設定で画像信号及び/又は走査信号を出力可能なように、Xドライバ回路110、データ線駆動制御回路110a、Yドライバ回路100及び走査線駆動制御回路110のハードウェア設計がなされ、これらの回路内の単純な切り換え動作により反射型表示用又は透過型表示用に最適化された電圧設定で液晶駆動が行われる。

【0079】以上説明したように第3実施形態によれば、半透過反射型の液晶装置においては一般に駆動電圧に対する反射型表示時の反射率Rの特性と透過型表示時の透過率Tの特性とは、相異なるものであるにも係わらず、図7に示した如き反射率R及び透過率Tの特性曲線夫々のスロープを最大限に利用して、反射型表示にも透過型表示にも高階調表示を行うことができ、コントラストを高めることができる。特に、白表示と黒表示の中間調表示をするための液晶印加電圧のレベルを反射型表示と透過型表示で変えることは非常に有用である。

【0080】上述した本実施形態によれば、二重映りや表示のにじみのない反射型表示と透過型表示とを切り換えて表示することができ、特に反射型表示と透過型表示とのいずれにおいても高コントラストで高品位のカラー液晶装置が実現できる。

【0081】（第4実施形態）本発明に係る液晶装置の第4実施形態を図11から図14を参照して説明する。第4実施形態は、本発明が好適に適用されるTFDアクティブマトリクス液晶装置の実施形態である。

【0082】先ず、本実施形態に用いられる2端子型非線形素子の一例としてのTFD駆動素子付近における構成について図11及び図12を参照して説明する。ここに、図11は、TFD駆動素子を画素電極等と共に模式的に示す平面図であり、図12は、図11のB-B'断面図である。尚、図12においては、各層や各部材を図面上で認識可能な程度の大きさとするため、各層や各部材毎に縮尺を異ならしめてある。

【0083】図11及び図12において、TFD駆動素子40は、透明基板2上に形成された絶縁膜41を下地として、その上に形成されており、絶縁膜41の側から順に第1金属膜42、絶縁層44及び第2金属膜46から構成され、TFD構造（Thin Film Diode）或いはMIM構造（Metal Insulator Metal構造）を持つ。そして、TFD駆動素子40の第1金属膜42は、透明基板2上に形成された走査線61に接続されており、第2金属膜46は、第2電極の他の一例である導電性の反射膜からなる画素電極62に接続されている。尚、走査線61に代えてデータ線（後述する）を透明基板2上に形成し、画素電極62に接続して、走査線61を対向基板側に設けてもよい。

【0084】透明基板2は、例えばガラス、プラスチックなどの絶縁性及び透明性を有する基板等からなる。下

(11)

19

地をなす絶縁膜41は、例えば酸化タンタルからなる。但し、絶縁膜41は、第2金属膜46の堆積後等に行われる熱処理により第1金属膜42が下地から剥離しないこと及び下地から第1金属膜42に不純物が拡散しないことを主目的として形成されるものである。従って、透明基板2を、例えば石英基板等のように耐熱性や純度に優れた基板から構成すること等により、これらの剥離や不純物の拡散が問題とならない場合には、絶縁膜41は省略することができる。第1金属膜42は、導電性の金属薄膜からなり、例えば、タンタル単体又はタンタル合金からなる。絶縁膜44は、例えば化成液中で第1金属膜42の表面に陽極酸化により形成された酸化膜からなる。第2金属膜46は、導電性の金属薄膜からなり、例えば、クロム単体又はクロム合金からなる。

【0085】本実施形態では特に、画素電極62は、上述した各実施形態のように長方形や正方形のスリット、微細な開口等の光が透過する領域が設けられているか或いは、画素毎に対向基板上の透明電極よりも小さく形成されてその間隙を介して光が透過可能に構成されている。また、画素電極62は、単一の反射膜から構成されてもよいし、反射層と透明電極層との積層体から構成されてもよい。

【0086】更に、画素電極62、TFD駆動素子40、走査線61等の液晶に面する側(図中上側表面)には、透明絶縁膜29が設けられており、その上に例えばポリイミド薄膜などの有機薄膜からなりラビング処理等の所定の配向処理が施された配向膜19が設けられている。

【0087】以上、2端子型非線形素子としてTFD駆動素子の幾つかの例について説明したが、ZnO(酸化亜鉛)バリスタ、MSI(Metal Semi-Insulator)駆動素子、RD(Ring Diode)などの双方向ダイオード特性を有する2端子型非線形素子を本実施形態の反射型液晶装置に適用可能である。

【0088】次に、以上のように構成されたTFD駆動素子を備えて構成される第4実施形態であるTFDアクティブマトリクス駆動方式の半透過反射型液晶装置の構成及び動作について図13及び図14を参照して説明する。ここに、図13は、液晶素子を駆動回路と共に示した等価回路図であり、図14は、液晶素子を模式的に示す部分破断斜視図である。

【0089】図13において、TFDアクティブマトリクス駆動方式の半透過反射型液晶装置は、透明基板2上に配列された複数の走査線61が、第1供給手段の一例を構成するYドライバ回路100に接続されており、その対向基板上に配列された複数のデータ線60が、第2供給手段の一例を構成するXドライバ回路110に接続されている。尚、Yドライバ回路100及びXドライバ回路110は、透明基板2又はその対向基板上に形成されていてもよく、この場合には、駆動回路内蔵型の半透

20

過反射型液晶装置となる。或いは、Yドライバ回路100及びXドライバ回路110は、半透過反射型液晶装置とは独立した外部ICから構成され、所定の配線を経て走査線61やデータ線60に接続されてもよく、この場合には、駆動回路を含まない半透過反射型液晶装置となる。

【0090】マトリクス状の各画素領域において、走査線60は、TFD駆動素子40の一方の端子に接続されており(図11及び図12参照)、データ線60は、液晶層3及び画素電極62を介してTFD駆動素子40の他方の端子に接続されている。従って、各画素領域に対応する走査線61に走査信号が供給され、データ線60にデータ信号が供給されると、当該画素領域におけるTFD駆動素子40がオン状態となり、TFD駆動素子40を介して、画素電極62及びデータ線60間にある液晶層3に駆動電圧が印加される。そして、明所では外光を画素電極62が反射することにより反射型表示が行われ、暗所ではバックライトからの光源光を画素電極62の開口部が透過することにより透過型表示が行われる。

【0091】図14において、半透過反射型液晶装置は、透明基板2と、これに対向配置される透明基板(対向基板)1とを備えている。透明基板1は、例えばガラス基板からなる。透明基板2には、マトリクス状に画素電極62が設けられており、各画素電極62は、走査線61に接続されている。透明基板1には、走査線61と交差する方向に伸びており、短冊状に配列された透明電極としての複数のデータ線60が設けられている。データ線60は、例えばITO(Indium Tin Oxide)膜などの透明導電性薄膜からなる。データ線60の下側には、例えばポリイミド薄膜などの有機薄膜からなりラビング処理等の所定の配向処理が施された配向膜9が設けられている。更に、透明基板1には、その用途に応じて、ストライプ状、モザイク状、トライアングル状等に配列された色材膜からなる不図示のカラーフィルタが設けられる。

【0092】以上説明したように、第4実施形態のTFDアクティブマトリクス駆動方式の半透過反射型液晶装置によれば、二重映りや表示のにじみのない反射型表示と透過型表示とを切り換えて表示することのできるカラー液晶装置が実現でき、画像データの階調レベルに対する駆動電圧の設定を反射型表示時と透過型表示時とで切り換えることにより、反射型表示時にも透過型表示時にも高コントラストで高品位の画像表示が行える。特に駆動手段の一例を構成するX及びYドライバ回路110及び100における電圧制御により半透過反射型液晶装置をノーマリーブラックモードで駆動できる。

【0093】(第5実施形態)次に、図13に示したYドライバ回路110及びXドライバ回路110を含み、上述したTFDアクティブマトリクス駆動方式の半透過反射型の液晶装置を駆動する駆動装置に係る一の実施形

(12)

21

態における構成及び動作について図15から図19を参照して説明する。尚、図15は、駆動装置の具体的構成を示すブロック図であり、図16は、第1GCP信号及び第2GCP信号の波形図であり、図17は、Xドライバ回路における一本のデータ線を駆動する部分のブロック図であり、図18は、駆動装置における各種信号の波形及び時間的關係を示すタイミングチャートである。図19は、各階調レベルに対する1H期間中の一画素への印加信号パルスのオン幅の変化を示す特性図である。

【0094】図15に示すように、駆動装置は、階調データ（表示データ）の示す階調レベルに応じた大きさの実効値を有する印加電圧を液晶素子（駆動回路を除く液晶装置の本体部分）に供給する第1及び第2供給手段の夫々一例たるYドライバ回路110及びXドライバ回路110を備える。駆動装置は、Xドライバ回路110における各階調レベルに対するデータ信号の各パルス幅の設定を切り換えることにより、各階調レベルに対する印加電圧の実効値の各大きさの設定を光源ランプ212aの非点灯に応じて反射型表示用の設定に切り換え、且つ光源ランプ212aの点灯に応じて透過型表示用の設定に切り換える第2制御手段の一例を構成するドライバコントロール回路310と、Yドライバ回路100及びXドライバ回路110に所定の高電位、低電位、基準電位の制御電圧を供給する制御電力供給回路320と、光源ランプ212bの点灯及び非点灯（消灯）を制御する点灯制御回路330とを更に備える。

【0095】ドライバコントロール回路310は、後述のようにXドライバ回路110における階調レベルに応じたパルス幅のデータ信号を生成する際のパルス幅変調の基礎となる第1GCP（グレースケールコントロールパルス）信号及び第2GCP信号を夫々生成する第1GCP生成回路311及び第2GCP生成回路312と、RGBの階調データが入力されると所定フォーマットのデータ信号に変換してXドライバ回路110に出力するデータコントロール回路313と、Xクロック信号、垂直同期信号、水平同期信号等の各種の制御信号、タイミング信号等が入力され、第1及び第2GCP生成回路311及び312における第1及び第2GCP信号の生成タイミングを制御するLCD駆動信号を生成するLCD駆動信号生成回路314とを備えて構成される。

【0096】第1GCP生成回路311は、上述の反射型表示用のパルス幅の設定の基準となる、階調レベルの刻みに対応して配列された複数のパルスからなる第1GCP信号を生成する。

【0097】第2GCP生成回路312は、上述の透過型表示用のパルス幅の設定の基準となる、階調レベルの刻みに対応して配列された複数のパルスからなる第2GCP信号を生成する。

【0098】図16に示すように、第1及び第2GCP信号は、相互に異なるパルス配列を有しており、第1G

22

C P信号に基づいてXドライバ回路110から供給されるデータ信号と第2GCP信号に基づいてXドライバ回路110から供給されるデータ信号とでは、同一の階調データに対するパルス幅が異なる。第1及び第2GCP信号は、N階調の階調データの場合に、夫々階調レベル（1）を表示するためのデータ信号のパルス幅に対応するパルスから階調レベル（N-1）を表示するためのデータ信号のパルス幅に対応するパルスまで、合計N-2本のパルスからなり、パルス間隔が階調レベルの刻みに対応するように夫々配列されている。

【0099】このような第1及び第2GCP生成回路311及び312は夫々、例えば、複数の比較回路及びこれらの比較結果の論理和を演算する論理和回路から構成されており、これらの比較回路により、LCD駆動信号の電圧値を、予め各階調レベルの刻みに対するパルス幅の変化幅に基いて反射型表示用又は透過型表示用に設定された複数通りの電圧値と比較する。そして、これらの比較回路の比較結果の論理和を演算することにより、その演算出力として、各階調レベルの刻みに応じたパルス幅の変化幅に対応して間隔が異なる1選択期間当たりN-2個のパルスの列からなる図16に示したような第1及び第2GCP信号を生成するように構成されている。

【0100】再び、図15において、ドライバコントロール回路310は、このような第1及び第2GCP信号のうちのいずれかを選択的にXドライバ回路110に供給するパルス信号スイッチ315を更に備える。そして、パルス信号スイッチ315は、点灯制御回路330による点灯スイッチ331を用いた非点灯（消灯）制御に同期して、第1GCP信号を供給すると共に、点灯制御回路330による点灯スイッチ331を用いた点灯制御に同期して、第2GCP信号を供給するように、パルス信号スイッチ315を切り換える。尚、点灯制御回路330による点灯及び非点灯制御は、例えば、使用者によるマニュアルスイッチ操作や、外光強度を検出して、その検出結果に基づく自動スイッチ操作により行われる。すると、この点灯及び非点灯の制御に同期して、パルス信号スイッチ315が切り換えられる。従って、光源ランプ212aの非点灯（消灯）及び点灯に応じて、確実に且つ遅延無く反射型表示用の設定と透過型表示用の設定とに切り換えることができる。

【0101】尚、このようなパルス信号スイッチ315における切り換え動作は、図15に示したように点灯制御回路330から点灯スイッチ331に送られる点灯制御信号Smodeに基づいて行うように構成してもよいが、光源ランプ212aが点灯又は消灯されたことを検出する検出器からの検出信号に基づいて行うように構成してもよい。

【0102】図15において、制御電力供給回路320は、Xドライバ回路110がデータ信号生成のために用

(13)

23

いる高電位の電圧 (VHX)、低電位の電圧 (VLX)、基準電位の電圧 (VCX) などの制御電圧を供給するX側電力供給回路321と、Yドライバ回路100が走査信号生成のために用いる高電位の電圧 (VHY)、低電位の電圧 (VLY)、基準電位の電圧 (VCY) などの制御電圧を供給するY側電力供給回路322とを備えて構成される。

【0103】図17に示すように、Xドライバ回路110の一本のデータ線にデータ信号を供給するXドライバ回路部分110aには、ドライバコントロール回路310のデータコントロール回路313 (図15参照) から、例えば64通りの階調レベル (階調レベル0~63) のうちの一つのレベルを示す6ビット等の所定数ビットからなるデジタル信号の形式の表示データが各画素について夫々入力される。また、表示データの水平同期信号HSYNCと、Xドライバ回路110用の基準クロックXCKと、1選択期間毎に発せられるパルス信号であるRES信号と、1選択期間の開始時点及び終了時点で夫々電圧レベルが反転する2値信号であるFR信号とが入力される。また、データ信号生成用の電源として制御電力供給回路330 (図15参照) から電圧VHX、VCX及びVLXが供給される。更に、本実施の形態では特に、ドライバコントロール回路310のパルス信号スイッチ315からGCP信号 (第1又は第2GCP信号) が供給される。

【0104】図17において、Xドライバ回路部分110aは、シフトレジスタ401、ラッチ回路402、グレースケールコントロール回路403、GCPデコーダ回路404、FRデコーダ回路405、レベルシフタ回路406及びLCDドライバ408を備えて構成されている。

【0105】Xドライバ回路部分110aは、表示データが入力されると、所定数のビット毎にシフトレジスタ401に順次保持して行く。ラッチ回路402は、複数のデータ線と一対一対応に対応したラッチ部を有しており、表示データのシフトレジスタ401への転送を順次行うことにより、1水平ライン分の表示データが全て保持されたところで改めて、このラッチ回路402にラッチされることになる。

【0106】ここで、GCPデコーダ404は、1選択期間当たり所定個数のパルスの列からなるGCP信号に従って、グレースケールコントロール回路403による制御を受けて、ラッチ回路402内の所定数ビットの各表示データ (デジタル値) が示す階調レベルに対応したパルス幅を持つ信号を生成する。

【0107】FRデコーダ405は、選択期間毎に電圧レベルが変わる2値信号であるFR信号を用いて、GCPデコーダ回路404の信号出力の電圧極性を選択期間毎に反転させた波形を持つデータ信号を出力する。より具体的には、ラッチされた表示データ (デジタル値) の

24

MSBに応じて、各選択期間について、LCDドライバ408を構成する各トランジスタのオン/オフ信号を生成する。このように選択期間 (1H期間) 毎にオンに対応するデータ信号の電圧レベルを反転させるのは、液晶を交流駆動するためであり、走査信号のオン/オフ電圧も、1H期間毎に反転される。

【0108】このように生成されたLCDドライバ408内の各トランジスタのオン/オフ信号は、レベルシフタ回路406により、各データ線に対応した電圧レベルにシフトされている。そして、電圧レベルがシフトされたオン/オフ信号が各ゲートに入力されると、LCDドライバ回路408の各トランジスタは夫々、オン/オフされ、各パルスの電圧値が、各ソース又はドレインに接続された複数の電圧VHX、VCX及びVLXの組み合わせにより規定される電圧値とされる。

【0109】以上のように構成されたXドライバ回路部分110aを複数含んでなるXドライバ回路110 (図15参照) により、1水平ライン分のデジタル信号が全て保持され、複数のデータ線14に同時に供給されることになる。

【0110】以上の動作を図18のタイミングチャートを参照して更に説明する。

【0111】図18に示すように、Xドライバ回路110には、各選択期間毎にRES信号が入力され、これと並行して、1選択期間に例えば62個 (=N-2個: 64階調の場合) のパルスの列からなるGCP信号が入力され、更に、例えば、特定の画素について階調レベル2、階調レベル5及び階調レベル0を示す表示データ (デジタル信号) がフィールド単位で入力される。すると、GCP信号に基いて、GCPデコーダ404により、その2番目や5番目のパルスのタイミングでデータ信号のレベルはオンとされる。そしてFR信号に基いて、FRデコーダ405により、選択期間毎にデータ信号のオン電圧又はオフ電圧の極性が反転され、更に、所定の波高値をとるデータ信号が、出力される。

【0112】この際、データ信号が1選択期間 (1H期間) 中の2値を取る時間的な割合と液晶パネルの透過率とは、一般にリニアな関係とはならない。例えば64階調の場合、1H期間中のオンを取る幅を変化させた場合に得られる各階調レベル0 (例えば黒)、1、2、…、63 (例えば白) と当該オン幅とは、液晶の特性及び液晶パネルの特性等により図19のグラフに示すような関係を持つ。このため、本実施の形態における階調表示は、このような関係に基づいて、入力データの示す階調レベルに応じてデータ信号のオン幅を変化させている。即ち、階調レベル0側から階調レベル63側へ近付く程に、オン幅の変化率は減少して行くので、より僅かなオン幅の差を制御するため、図16或いは図18の上から2段目に示したように、階調レベルの差に応じたデータ信号のオン幅の差に対応して間隔が異なるように、“階

(14)

25

調数-2”個(例えば、64階調の場合には62個)のパルスの列からなるGCP信号を生成しているのである。即ち、図19のような関係の下では、第1及び第2GCP生成回路311及び312では、階調レベルが上がるに従って間隔が徐々に狭くなる62個のパルスの列からなる第1及び第2GCP信号を夫々生成している。

【0113】このような性質を持つGCP信号(第1又は第2GCP信号)に基づいて、例えば、図18において、階調レベル2に対して、対応する1H期間のうちGCP信号中の2番目のパルスから当該1H期間の終了までの期間だけデータ信号はオン(例えば、高電圧レベル)とされる。次に、階調レベル5に対して、対応する1H期間のうちGCP信号中の5番目のパルスから当該1H期間の終了までの期間だけデータ信号はオン(例えば、低電圧レベル)とされる。また、次に階調レベル0に対して、対応する1H期間の最後までデータ信号はオフ(例えば、高電圧レベル)とされる。

【0114】そして、図18の最下段に示したように、一つの画素電極(即ち、図示の表示データが供給される一つのデータ線と、走査線(N行目)との間に接続された画素電極)に印加される印加信号(=走査信号-データ信号)が、対応するデータ信号のオン幅に対応した期間だけTFD駆動素子のしきい値を越えて当該TFD駆動素子をオン状態(低抵抗状態)とする。この結果、データ信号のオン幅に対応した実効電圧が当該画素電極とデータ線又は走査線に挟持された液晶層部分に加えられる。

【0115】このように、データ信号のオン幅が液晶パネルの各画素における透過率を決定し、液晶パネル全体として表示データに対応する表示が行われるのである。

【0116】以上の結果、本実施の形態の駆動装置により、光源ランプ212a非点灯時には、反射型表示を行うことができ、光源ランプ212a点灯時には、透過型表示を行うことができる。

【0117】ここで本実施の形態では特に、ドライバコントロール回路310のパルス信号スイッチ315(図15参照)により、Xドライバ回路110における各階調レベルに対する印加電圧の実効値の各大きさの設定が、光源ランプ212aの非点灯に応じて反射型表示用の設定に切り換えられるか、又は光源ランプ212aの点灯に応じて透過型表示用の設定に切り換えられる。

【0118】従って、階調レベルと反射型表示時における反射率との関係を、図7に示した駆動電圧に対する透過率Tの特性に適合した関係、即ち、透過率Tの特性曲線のスロープを最大限に利用する関係とするように各階調レベルに対するデータ信号の各パルス幅の設定(具体的には、図16に示した第1GCP信号における各階調レベルの刻みに対する各パルスの間隔の設定)を行えば、透過型表示時のコントラストを効率的に高められる。同時に、図7に示した駆動電圧に対する反射率Rの

26

特性に適合した関係、即ち、反射率Rの特性曲線のスロープを最大限に利用する関係とするように各階調レベルに対するデータ信号の各パルス幅の設定(具体的には、図16に示した第1GCP信号における各階調レベルの刻みに対する各パルスの間隔の設定)を行えば、反射型表示時のコントラストを効率的に高められる。

【0119】以上説明したように、第5実施形態の液晶装置によれば、視差による二重映りや表示のにじみなどが発生せず、反射型表示時にも透過型表示時にも高コントラストで高品位の画像表示が可能となる。

【0120】また本実施の形態では、パルス信号スイッチ315による比較的簡単な切り換え動作により、反射型表示モードと透過型表示モードとの切り換えを迅速且つ確実に行うことができるので実用上便利である。

【0121】(第6実施形態)次に、図13に示したYドライバ回路110及びXドライバ回路110を含み、上述したTFDアクティブマトリクス駆動方式の半透過反射型の液晶装置を駆動する駆動装置に係る他の実施形態における構成及び動作について図20から図21を参照して説明する。尚、図20は、駆動装置の具体的構成を示すブロック図であり、図21は、2種類の走査信号の波形を示す概念図であり、図21は、走査信号の波高値(DC電圧)に対する透過率(T)の特性図である。尚、図20において、図15に示した第5実施形態の場合と同じ構成要素については同じ参照符号を付し、その説明は省略する。

【0122】図20に示すように、駆動装置は、第5実施形態における第1及び第2GCP生成回路311及び312並びにパルス信号スイッチ315に代えて、単一のGCP生成回路311'を備えたドライバコントロール回路310'を備える。駆動装置は、第5実施形態における制御電力供給回路320に代えて、第1及び第2Y側電力供給回路323及び324と、第1及び第2Y側電力供給回路323及び324からの制御電圧をYドライバ回路100に選択的に供給する制御電圧スイッチ325とを含む制御電力供給回路320'を備える。この制御電圧スイッチ325は、点灯制御回路330から供給される点灯制御信号Smodeに基づいて切換動作を行う。その他の構成については、図15に示した第5実施形態の場合と同様である。

【0123】ここで特に、制御電力供給回路320'は、第2制御手段の一例を構成しており、第1Y側電力供給回路323は、反射型表示用の走査信号の波高値の設定の基準となる高電位の電圧(VHY1)、低電位の電圧(VLY1)、基準電位の電圧(VCY1)を一組の第1制御電圧として供給する。他方、第2Y側電力供給回路324は、第2制御電圧の一例として、透過型表示用の走査信号の波高値の設定の基準となる高電位の電圧(VHY2)、低電位の電圧(VLY2)、基準電位の電圧(VCY2)を一組の第2制御電圧として供給す

(15)

27

る。そして、制御電圧スイッチ325は、光源ランプ212aの非点灯に応じて第1制御電圧をYドライバ回路100に選択的に供給し、光源ランプ212aの点灯に応じて第2制御電圧をYドライバ回路100に選択的に供給するように構成されている。

【0124】従って、第6実施形態では、Xドライバ回路110により、階調レベルに応じたパルス幅を有するデータ信号が、データ線に供給される。これと並行して、Yドライバ回路100により、所定幅を有すると共に第1又は第2制御電圧に対応する波高値を持つ走査信号が走査線に供給される。

【0125】図21は、このように生成された2種類の走査信号の一例の波形図である。

【0126】図21において、第1制御電圧に基づいて生成される反射型表示用に設定された走査信号（図中、左側）と、第2制御電圧に基づいて生成される透過型表示用に設定された走査信号（図中、右側）とでは、後者の波高値が、前者の波高値よりも、 ΔV だけ高い。従って、ノーマリーホワイトモードでは、透過型表示時の走査信号により駆動した場合の方が、印加電圧の電圧値が ΔV だけ大きいため、表示の明るさは暗くなる。即ち、反射型表示時の走査信号により駆動した場合の方が、印加電圧の電圧値が ΔV だけ小さいため、表示の明るさは明るくなる。

【0127】従って、階調レベルと反射型表示時における反射率との関係を、図7に示した駆動電圧に対する透過率Tの特性に適合した関係、即ち、透過率Tの特性曲線のスロープを最大限に利用する関係とするように各階調レベルに対する第2の制御電圧の設定（具体的には、電圧VHY2、VLY2、VCH2の値の設定）を行えば、透過型表示時のコントラストを効率的に高められる。同時に、図7に示した駆動電圧に対する反射率Rの特性に適合した関係、即ち、反射率Rの特性曲線のスロープを最大限に利用する関係とするように各階調レベルに対する第1の制御電圧の設定（具体的には、電圧VHY1、VLY1、VCH1の値の設定）を行えば、反射型表示時のコントラストを効率的に高められる。

【0128】以上説明したように、第6実施形態の液晶装置によれば、視差による二重映りや表示のにじみなどが発生せず、反射型表示時にも透過型表示時にも高コントラストで高品位の画像表示が可能となる。尚、具体的な第1及び第2制御電圧を構成する電圧VHY1、VLY1、VCY1、VHY2、VLY2及びVCY2の各値については、液晶装置について予め実験的、理論的、シミュレーション等により求められる。また、選択期間毎に印加電圧を反転させる駆動方式を採用する場合には、高電位の電圧VHY1（VHY2）と低電位の電圧VLY1（VLY2）と基準電位の電圧VCY1（VCY2）が必要であるが、図21に示したように波高値を切り換えられる限りにおいて、第1の制御電圧と第2の

28

制御電圧との間で、3つの電圧のうち一つ又は二つは同じ電位としてもよい。即ち、実際にスイッチで切り換える電圧は3つではなく、2つ又は1つでもよい。また、上述の反転駆動をしなければ、第1及び第2制御電圧は夫々、一対の電圧からなってもよい。

【0129】本実施の形態では特に、制御電圧スイッチ325による比較的簡単な切り換え動作により、反射型表示モードと透過型表示モードとの切り換えを迅速且つ確実に行うことができるので実用上便利である。

【0130】以上の第5及び第6実施形態では、所謂“4値駆動法”に基づいて、データ信号をなすパルスの幅及び波高値により規定される電気量を階調レベルに対応させて変調することにより階調制御を行うようにしたが、本発明によれば、例えば特開平2-125225号公報等に開示された充放電駆動法に基づいて、このような階調制御を行うことも可能である。

【0131】（第7実施形態）本発明に係る液晶装置の第7実施形態を図22から図24を参照して説明する。第7実施形態は、本発明が好適に適用されるTFTアクティブマトリクス液晶装置の実施形態である。図22は、液晶装置の画像表示領域を構成するマトリクス状に形成された複数の画素における各種素子、配線等の等価回路であり、図23は、データ線、走査線、画素電極等が形成された透明基板の相隣接する複数の画素群の平面図であり、図24は、図23のC-C'断面図である。尚、図24においては、各層や各部材を図面上で認識可能な程度の大きさとするため、各層や各部材毎に縮尺を異ならしめてある。

【0132】図22において、第7実施形態のTFTアクティブマトリクス方式の半透過反射型液晶装置では、マトリクス状に配置された第2電極の他の一例である画素電極62を制御するためのTFT130がマトリクス状に複数形成されており、画像信号が供給されるデータ線135がTFT130のソースに電気的に接続されている。データ線135に書き込む画像信号S1、S2、…、Snは、この順に線順次に供給しても構わないし、相隣接する複数のデータ線135同士に対して、グループ毎に供給するようにしても良い。また、TFT130のゲートに走査線131が電気的に接続されており、所定のタイミングで、走査線131にパルス的に走査信号G1、G2、…、Gmを、この順に線順次で印加するように構成されている。画素電極62は、TFT130のドレインに電気的に接続されており、スイッチング素子であるTFT130を一定期間だけそのスイッチを閉じることにより、データ線135から供給される画像信号S1、S2、…、Snを所定のタイミングで書き込む。画素電極62を介して液晶に書き込まれた所定レベルの画像信号S1、S2、…、Snは、対向基板（後述する）に形成された対向電極（後述する）との間で一定期間保持される。ここで、保持された画像信号がリークす

29

るのを防ぐために、画素電極62と対向電極との間に形成される液晶容量と並列に蓄積容量170を付加する。

【0133】図23において、TFTアレ基板としての透明基板2上には、マトリクス状に反射膜からなる画素電極62（その輪郭62aが図中点線で示されている）が設けられており、画素電極62の縦横の境界に各々沿ってデータ線135、走査線131及び容量線132が設けられている。データ線135は、コンタクトホール85を介してポリシリコン膜等からなる半導体層81aのうちソース領域に電氣的接続されている。画素電極62は、コンタクトホール85を介して半導体層81aのうちドレイン領域に電氣的接続されている。容量線132は、絶縁膜を介して半導体層1aのうちのドレイン領域から延設された第1蓄積容量電極に対向配置しており、蓄積容量170を構成する。また、半導体層81aのうち図中右上がりの斜線領域で示したチャンネル領域81a'に対向するように走査線131が配置されており、走査線131はゲート電極として機能する。このように、走査線131とデータ線135との交差する個所には夫々、チャンネル領域81a'に走査線131がゲート電極として対向配置されたTFT130が設けられている。

【0134】図24に示すように、液晶装置は、透明基板2と、これに対向配置される透明基板（対向基板）1とを備えている。これらの透明基板1及び2は夫々、例えば石英、ガラス、プラスチックなどの絶縁性及び透明性を有する基板等からなる。

【0135】本実施形態では特に、画素電極62は、上述した各実施形態のように長方形や正方形のスリット、微細な開口等の光が透過する領域が設けられているか或いは、画素毎に対向基板上の透明電極よりも小さく形成されてその間隙を介して光が透過可能に構成されている。また、画素電極62は、単一の反射膜から構成されてもよいし、反射層と透明電極層との積層体から構成されてもよい。

【0136】更に、画素電極62、TFT130等の液晶に面する側（図中上側表面）には、透明絶縁膜29が設けられており、その上に例えばポリイミド薄膜などの有機薄膜からなりラビング処理等の所定の配向処理が施された配向膜19が設けられている。

【0137】他方、透明基板1には、そのほぼ全面に透明電極の他の一例としての対向電極121が設けられており、各画素の非開口領域に、ブラックマスク或いはブラックマトリクスと称される第2遮光膜122が設けられている。対向電極121の下側には、例えばポリイミド薄膜などの有機薄膜からなりラビング処理等の所定の配向処理が施された配向膜9が設けられている。更に、透明基板1には、その用途に応じて、ストライプ状、モザイク状、トライアングル状等に配列された色材膜からなる不図示のカラーフィルタが設けらる。

30

【0138】透明基板2には、各画素電極62に隣接する位置に、各画素電極62をスイッチング制御する画素スイッチング用TFT130が設けられている。

【0139】このように構成され、画素電極62と対向電極121とが対面するように配置された一对の透明基板1及び2の間には、第1実施形態の場合と同様にシール材により囲まれた空間に液晶が封入され、液晶層3が形成される。

【0140】更に、複数の画素スイッチング用TFT30の下には、第1層間絶縁膜112が設けられている。第1層間絶縁膜112は、透明基板2の全面に形成されることにより、画素スイッチング用TFT30のための下地膜として機能する。第1層間絶縁膜112は、例えば、NSG（ノンドーブトシリケートガラス）、PSG（リンシリケートガラス）、BSG（ボロンシリケートガラス）、BPSG（ボロンリンシリケートガラス）などの高絶縁性ガラス又は、酸化シリコン膜、窒化シリコン膜等からなる。

【0141】図24において、画素スイッチング用TFT130は、コンタクトホール85を介してデータ線135に接続されたソース領域、走査線131にゲート絶縁膜を介して対向配置されたチャンネル領域81a'及びコンタクトホール88を介して画素電極62に接続されたドレイン領域を含んで構成されている。データ線131は、A1等の低抵抗な金属膜や金属シリサイド等の合金膜などの遮光性且つ導電性の薄膜から構成されている。また、その上には、コンタクトホール85及び88が開孔された第2層間絶縁膜114が形成されており、更に、その上には、コンタクトホール88が開孔された第3層間絶縁膜117が形成されている。これら第2及び第3層間絶縁膜114及び117についても、第1層間絶縁膜112と同様に、NSG、PSG、BSG、BPSGなどの高絶縁性ガラス又は、酸化シリコン膜、窒化シリコン膜等からなる。

【0142】画素スイッチング用TFT130は、LD構造、オフセット構造、セルフアライン構造等いずれの構造のTFTであってもよい。更に、シングルゲート構造の他、デュアルゲート或いはトリプルゲート以上でTFT130を構成してもよい。

【0143】以上の如く構成された第7実施形態のTFTアクティブマトリクス駆動方式の半透過反射型の液晶装置は、Xドライバ回路により走査線131が駆動され、Yドライバ回路によりデータ線135が駆動されるが、この際、照明装置の点灯時と非点灯時とでは、対向電極121及び画素電極62（図24参照）を介して液晶層3に印加される液晶駆動電圧が同一画像に対して相異なるように、これらの対向電極121及び画素電極62が駆動される。即ち、データ線135に供給される画像信号及び走査線131に供給される走査信号のうち少なくとも一方の電圧設定を駆動回路において照明装置の

(17)

31

点灯と非点灯に応じて切り換えることにより、反射型表示時に当該反射型表示における駆動電圧に対する反射率特性に適合した駆動電圧により液晶層3を駆動しつつ、透過型表示時に当該透過型表示における駆動電圧に対する反射率特性に適合した駆動電圧により液晶層3を駆動することが可能となる。この場合更に、反射型表示時と透過型表示時とのコントラストを高めるだけでなく、ガンマ補正を同時に行うようにすることも可能である。

【0144】以上説明したように、第7実施形態のTFTアクティブマトリクス駆動方式の半透過反射型液晶装置によれば、画素電極62と対向電極121との間で、各画素電極62における液晶部分に電界を順次印加することにより各液晶部分の配向状態を制御可能となり、明所では外光を画素電極62が反射することにより反射型表示が行われ、暗所ではバックライトからの光源光を画素電極62の開口部が透過することにより透過型表示が行われる。この結果、二重映りや表示のにじみのない反射型表示と透過型表示とを切り換えて表示することのできるカラー液晶装置が実現でき、反射型表示時にも透過型表示時にも高コントラストで高品位の画像表示が行える。

【0145】特に、TFT130を介して各画素電極62に電力を供給するため、画素電極62間におけるクロストークを低減でき、より高品位の画像表示が可能となる。

【0146】尚、透明基板1上に対向電極を設けることなく、透明基板2上の画素電極62間における基板に平行な横電界で駆動してもよい。

【0147】ここで、以上説明した第1から第7実施形態に用いるカラーフィルタ5の着色層について図25を参照して説明する。図25は、カラーフィルタ5の各着色層の透過率を示す特性図である。各実施形態においては、反射型表示を行う場合、入射光が一旦カラーフィルタ5のいずれかの着色層を透過した後、液晶層3を通過して反射電極7等によって反射され、再び着色層を透過してから放出される。したがって、通常の透過型の液晶装置とは異なり、カラーフィルタを二回通過することになるため、通常カラーフィルタでは表示が暗くなり、コントラストが低下する。そこで、各実施形態では、図25に示すように、カラーフィルタ5のR、G、Bの各着色層の可視領域における最低透過率61が25～50%になるように淡色化して形成している。着色層の淡色化は、着色層の膜厚を薄くしたり、着色層に混合する顔料若しくは染料の濃度を低くしたりすることによってなされる。このことによって、反射型表示を行う場合に表示の明るさを低下させないように構成することができ

る。

【0148】このカラーフィルタ5の淡色化は、透過型表示を行う場合にはカラーフィルタ5を一回しか透過しないため、表示の淡色化をもたらすが、各実施形態では

32

反射電極によってバックライトの光が多く遮られることが多いため、表示の明るさを確保する上でむしろ好都合である。

【0149】(第8実施形態) 本発明の第8実施形態を図26を参照して説明する。第8実施形態は、以上説明した第1から第7実施形態のいずれか一つを備えた電子機器の実施形態である。即ち、第8実施形態は、上述した第1から第7実施形態に示した液晶装置を様々な環境下で低消費電力が必要とされる携帯機器の表示部として好適に用いた各種電子機器に係わる。図26に本発明の電子機器の例を3つ示す。

【0150】図26(a)は、携帯電話を示し、本体71の前面上部部に表示部72が設けられる。携帯電話は、屋内屋外を問わずあらゆる環境で利用される。特に自動車内で利用されることが多いが、夜間の車内は大変暗い。従って携帯電話に利用される表示装置は、消費電力が低い反射型表示をメインに、必要に応じて補助光を利用した透過型表示ができる半透過反射型液晶装置が望ましい。上記した第1実施形態乃至第7実施形態に記載の液晶装置を携帯電話の表示部72として用いれば、反射型表示でも透過型表示でも従来より明るく、コントラスト比が高い形態電話が得られる。

【0151】図26(b)は、ウォッチを示し、本体の中央73に表示部74が設けられる。ウォッチ用途における重要な観点は、高級感である。本発明の第1実施形態乃至第14実施形態に記載の液晶をウォッチの表示部74として用いれば、明るくコントラストが高いことはもちろん、光の波長による特性変化が少ないために色づきも小さい。従って、従来のウォッチと比較して、大変に高級感あるカラー表示が得られる。

【0152】図26(c)は、携帯情報機器を示し、本体75の上側に表示部76、下側に入力部77が設けられる。また表示部76の前面にはタッチ・キーを設けることが多い。通常のタッチ・キーは表面反射が多いため、表示が見づらい。従って、従来は携帯型と言えども透過型液晶装置を表示部として利用することが多い。ところが透過型液晶装置は、常時バックライトを利用するため消費電力が大きく、電池寿命が短い。このような場合にも上記した第1実施形態乃至第7実施形態の液晶装置を携帯情報機器の表示部76として用いれば、反射型でも半透過反射型でも、透過型でも表示が明るく鮮やかな携帯情報機器を得ることができる。

【0153】本発明の液晶装置は、上述した各実施形態に限られるものではなく、請求の範囲及び明細書全体から読み取れる発明の要旨或いは思想に反しない範囲で適宜変更可能であり、そのような変更を伴う液晶装置もまた本発明の技術的範囲に含まれるものである。

【図面の簡単な説明】

【図1】本発明に係る液晶装置の第1実施形態の概略構造を示す概略縦断面図(図1(a))及び概略平面図(図

(18)

33

1 (b)) である。

【図2】第1実施形態における開口部の一具体例を示す平面図である。

【図3】第1実施形態における開口部の他の具体例を示す平面図である。

【図4】第1実施形態における開口部の他の具体例を示す平面図である。

【図5】第1実施形態における開口部の他の具体例を示す平面図である。

【図6】第1実施形態における開口部の他の具体例を示す平面図である。

【図7】第1実施形態の液晶装置における駆動電圧に対する反射型表示時の反射率Rの特性及び透過型表示時の透過率Tの特性を示す特性図である。

【図8】本発明に係る液晶装置の第2実施形態の概略構造を示す概略縦断面図である。

【図9】第2実施形態における画素電極の概略構造を示す概略縦断面図である。

【図10】本発明に係る液晶装置の第3実施形態における液晶装置のブロック図である。


【図11】本発明の液晶装置に係る第4実施形態のTFT駆動素子を画素電極等と共に模式的に示す平面図である。

【図12】図11のB-B'断面図である。

【図13】第4実施形態における液晶素子を駆動回路と共に示した等価回路図である。

【図14】第4実施形態における液晶素子を模式的に示す部分破断斜視図である。

【図2】

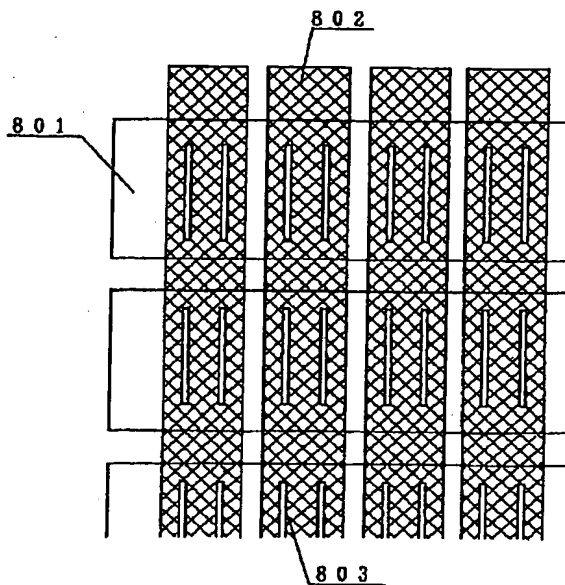

34

す部分破断斜視図である。

【図15】本発明の液晶装置に係る第5実施形態における液晶パネルのブロック図である。

【図16】第5実施形態において生成される第1及び第2GCP信号の波形図である。

【図17】第5実施形態に備えられた駆動装置に含まれるXドライバ回路の一部分のブロック図である。

【図18】第5実施形態に備えられた駆動装置の動作を示すタイミングチャートである。

【図19】第5実施形態における、階調レベルに対する1H期間中のデータ信号駆動用のパルスのオン幅の変化を示す特性図である。

【図20】本発明に係る第6実施形態における液晶パネルと駆動装置とからなる液晶装置のブロック図である。

【図21】第6実施形態において生成される2種類の走査信号の波形図である。

【図22】本発明に係る第7実施形態の液晶装置の画像表示領域を構成するマトリクス状に形成された複数の画素における各種素子、配線等の等価回路である。


【図23】第7実施形態におけるデータ線、走査線、画素電極等が形成された透明基板の相隣接する複数の画素群の平面図である。

【図24】図23のC-C'断面図である。

【図25】第1から第7実施形態におけるカラーフィルタの着色層毎の光透過率を示すグラフである。



【図26】本発明に係る第8実施形態の各種の電子機器の概略斜視図である。

【図4】

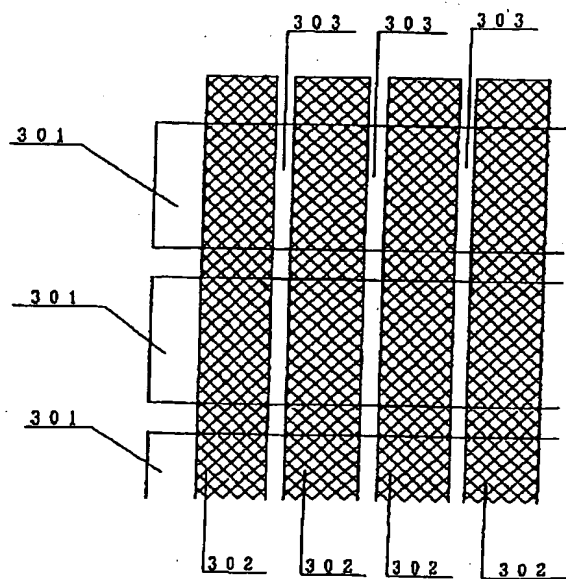


(19)


【図1】

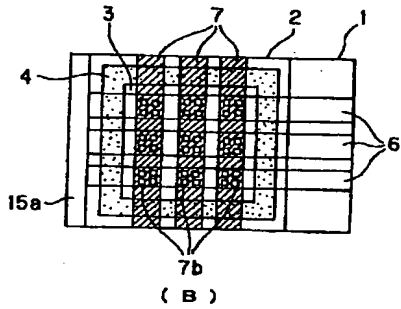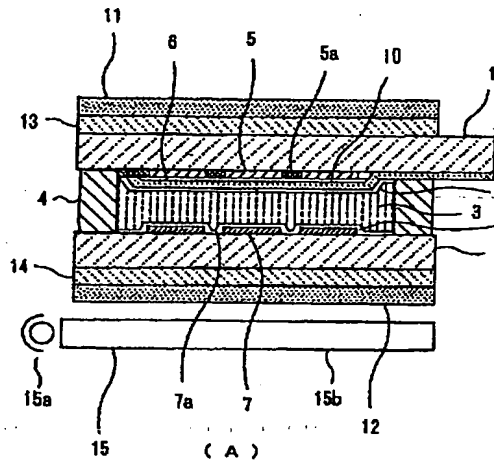


【図5】

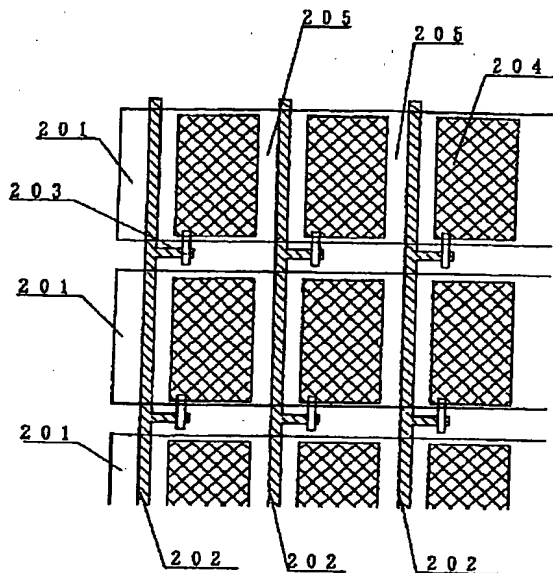


【図3】

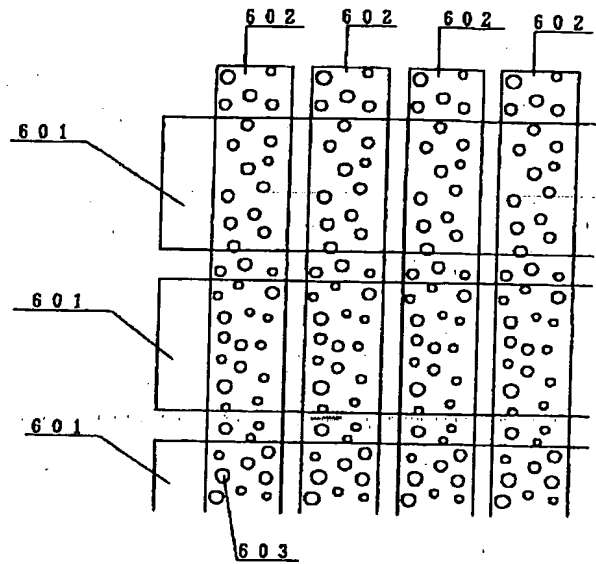

【図6】

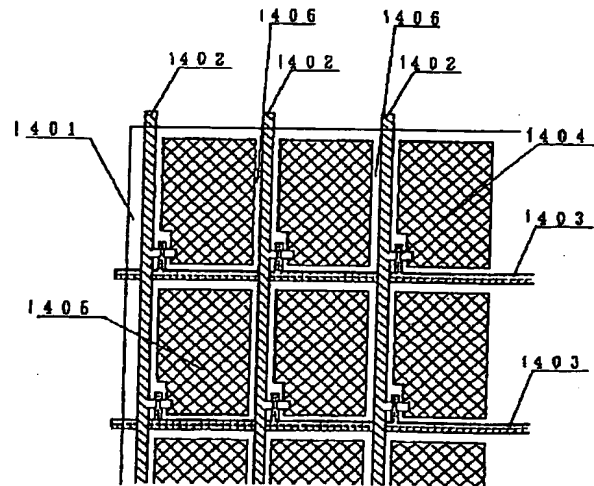


【図21】




(20)



【図7】

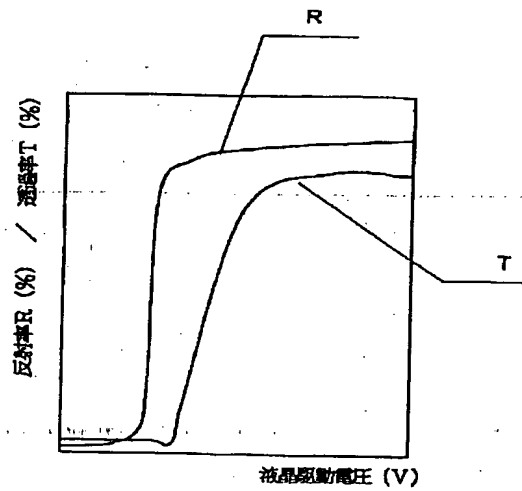


【図8】

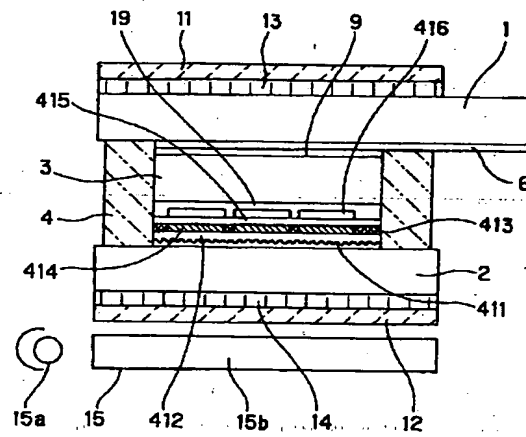


【図9】

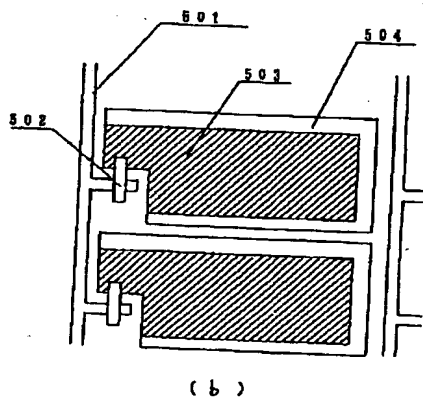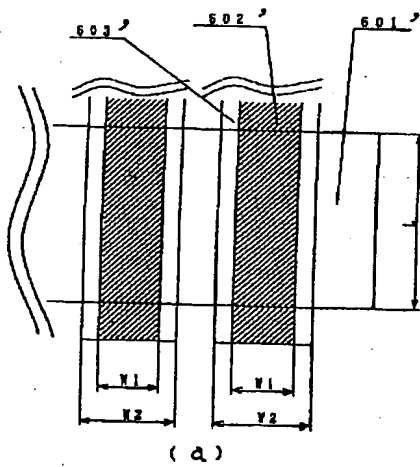


【図10】

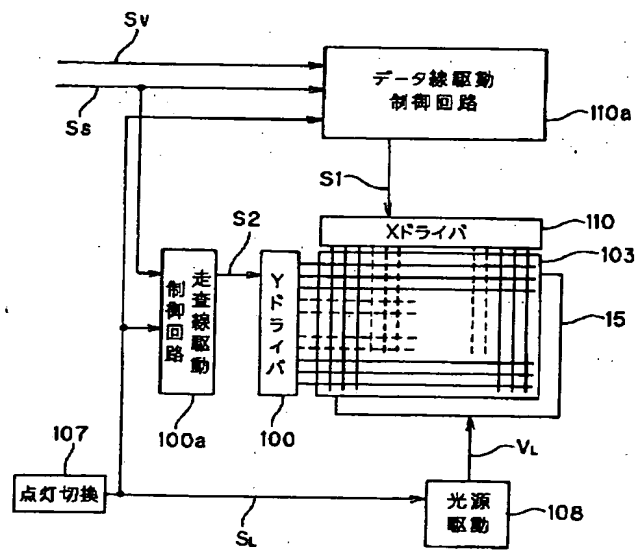

【図11】

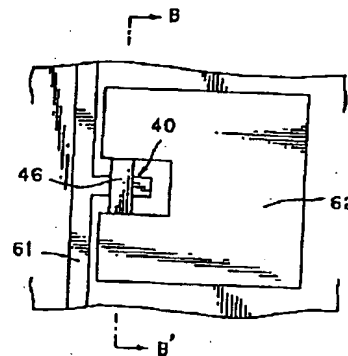


【図12】

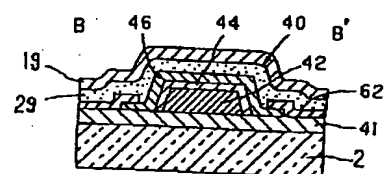


(21)


【図13】

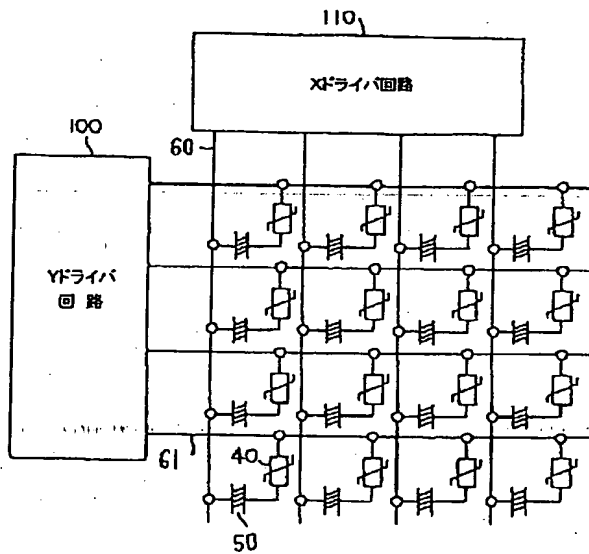


【図14】

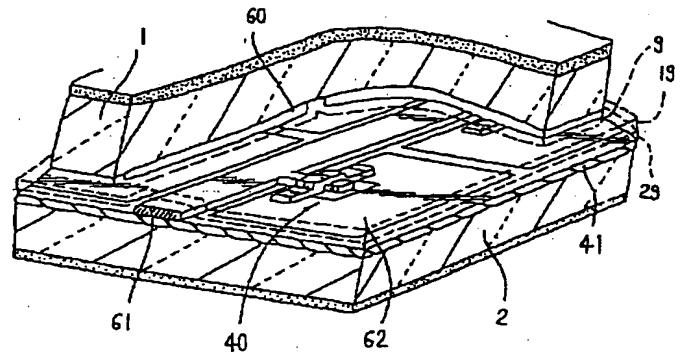


【図16】

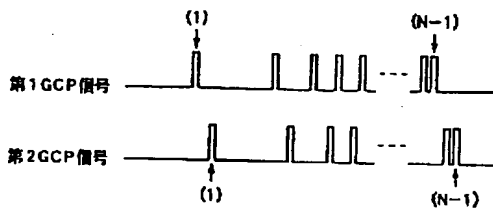

【図17】

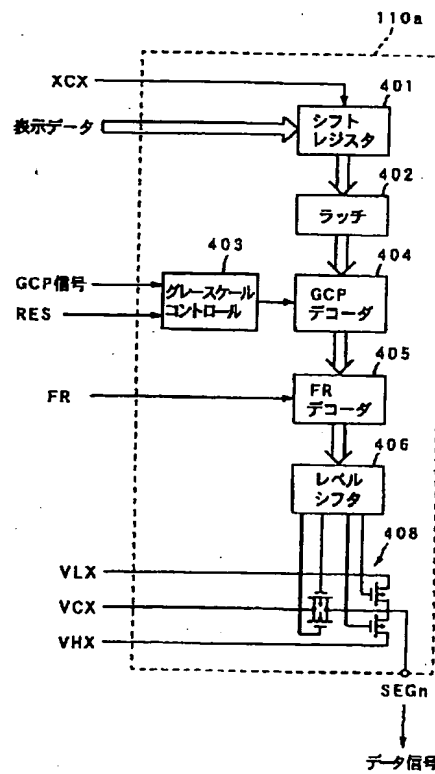


【図19】

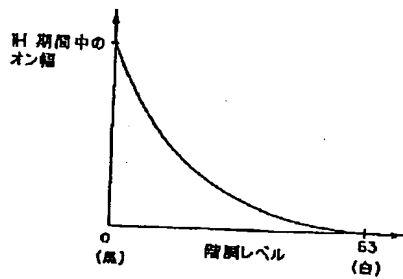


(22)

【図15】

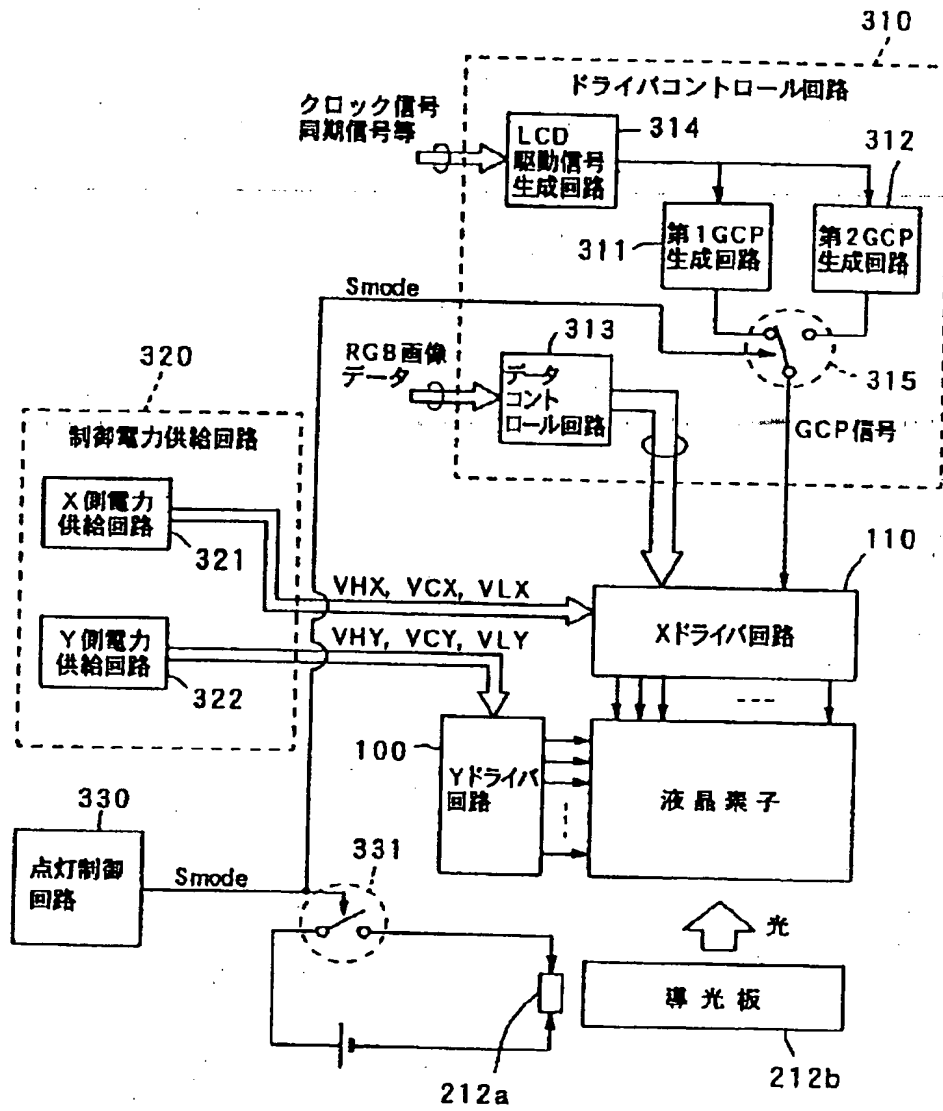


【図24】

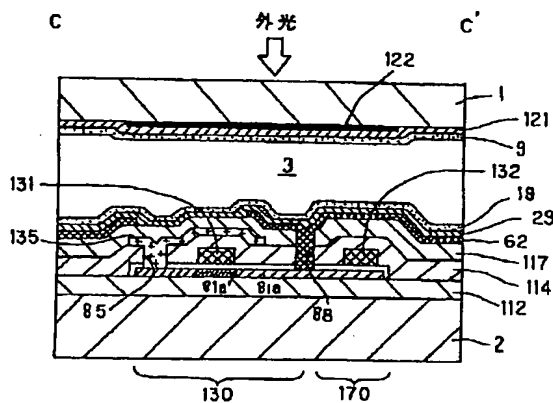


(24)

【図20】

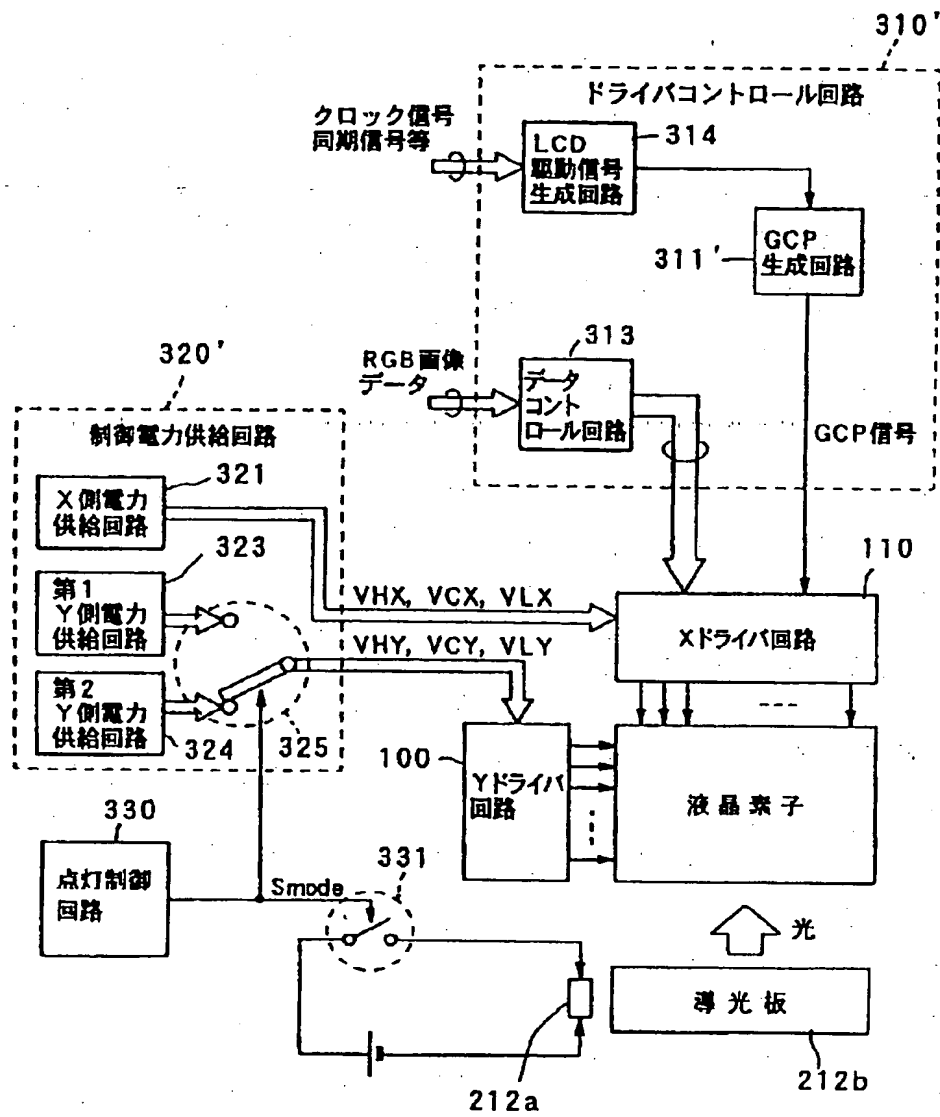


(25)

【図25】

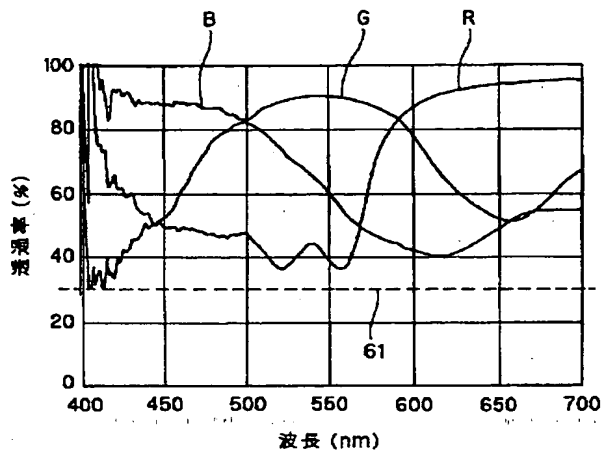

【図26】

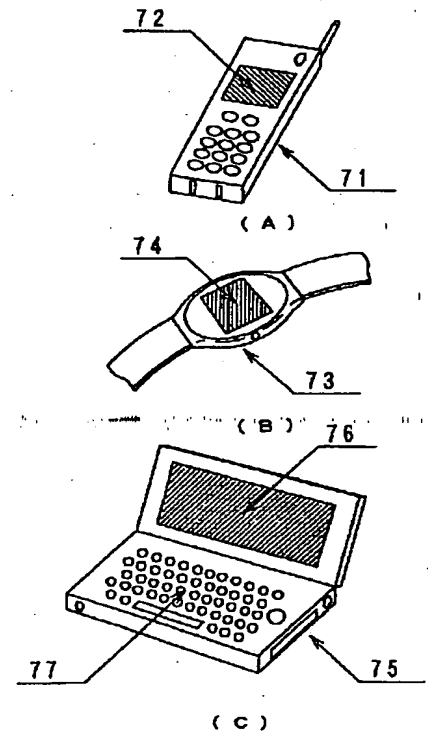

フロントページの続き

(72) 発明者 関 ▲琢▼巳
長野県諏訪市大和3丁目3番5号 セイコ
ーエプソン株式会社内

(72) 発明者 奥村 治
長野県諏訪市大和3丁目3番5号 セイコ
ーエプソン株式会社内

*** NOTICES ***

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. **** shows the word which can not be translated.
3. In the drawings, any words are not translated.

CLAIMS

[Claim(s)]

[Claim 1] Liquid crystal equipment characterized by providing the following. The 1st and 2nd substrates of a transparent pair A liquid crystal layer pinched between these 1st and 2nd substrates The 1st transparent electrode formed in a field by the side of said liquid crystal layer of said 1st substrate A driving means which drives said 1st and 2nd electrodes so that liquid crystal driver voltage impressed to said liquid crystal layer through said 1st and 2nd electrodes in the time of lighting of the 2nd electrode which consists of a transfective reflection layer formed in a field by the side of said liquid crystal layer of said 2nd substrate, said liquid crystal layer of said 2nd substrate and a lighting system arranged in the opposite side, and this lighting system, and an astigmatism LGT may be different from each other to the same image

[Claim 2] Liquid crystal equipment characterized by providing the following. The 1st and 2nd substrates of a transparent pair A liquid crystal layer pinched between these 1st and 2nd substrates The 1st transparent electrode formed in a field by the side of said liquid crystal layer of said 1st substrate The 2nd transparent electrode formed between a transfective reflection layer formed in a field by the side of said liquid crystal layer of said 2nd substrate, and this transfective reflection layer and said liquid crystal layer, A driving means which drives said 1st and 2nd electrodes so that liquid crystal driver voltage impressed to said liquid crystal layer through said 1st and 2nd electrodes in the time of lighting of said liquid crystal layer of said 2nd substrate, a lighting system arranged in the opposite side, and this lighting system and an astigmatism LGT may be different from each other to the same image

[Claim 3] Said transfective reflection layer is liquid crystal equipment according to claim 1 or 2 characterized by consisting of a reflective film with which opening which can penetrate light from said lighting system was prepared in each pixel.

[Claim 4] Said driving means is liquid-crystal equipment given in any 1 term of claims 1-3 characterized by to have a 1st supply means supply voltage to said 1st electrode, and the 1st control means which controls said 1st supply means to switch voltage which this 1st supply means supplies at a setup for a transparency mold display according to a switch and said lighting according to said astigmatism LGT to a setup for a reflective mold display.

[Claim 5] It is liquid crystal equipment according to claim 4 which is further equipped with a lighting means for switching which switches said lighting in said lighting system, and said astigmatism LGT, and is characterized by said 1st control means switching voltage which said 1st supply means supplies to a setup for a reflective mold display, or a setup for a transparency mold display synchronizing with switch actuation by this lighting means for switching.

[Claim 6] Said driving means is liquid-crystal equipment given in any 1 term of claims 1-5 characterized by to have a 2nd supply means supply voltage to said 2nd electrode, and the 2nd control means which controls said 2nd supply means to switch voltage which this 2nd supply means supplies at a setup for a transparency mold display according to a switch and said lighting according to said astigmatism LGT to a setup for a reflective mold display.

[Claim 7] Said 2nd supply means supplies voltage which has actual value of magnitude according to gradation level which gradation data shows to said 2nd electrode. Said 2nd control means Liquid crystal equipment according to claim 6 characterized by controlling said 2nd supply means to switch a setup of each magnitude of said actual value over each gradation level to a setup for a reflective mold display at a

setup for a transparency mold display according to a switch and said lighting according to said astigmatism .LGT.

[Claim 8] Liquid crystal equipment given in any 1 term of claims 1-7 characterized by having a color filter further between said transfective reflection layer and said 1st substrate.

[Claim 9] Liquid crystal equipment given in any 1 term of claims 1-8 characterized by said transfective reflection layer having irregularity.

[Claim 10] Electronic equipment characterized by equipping any 1 term of claims 1-9 with liquid crystal equipment of a publication.

[Translation done.]

*** NOTICES ***

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. **** shows the word which can not be translated.
3. In the drawings, any words are not translated.

DETAILED DESCRIPTION

[Detailed Description of the Invention]

[0001]

[The technical field to which invention belongs] This invention belongs to the technical field of liquid crystal equipment, and belongs to the technical field of the liquid crystal equipment which can switch and display a reflective mold display and a transparency mold display especially, and the electronic equipment using this liquid crystal equipment.

[0002]

[Description of the Prior Art] Conventionally, since high-reflective-liquid-crystal equipment had small power consumption, it was used abundantly at the pocket device, the adjunctive display of equipment, etc., but since the check by looking of a display was enabled using outdoor daylight, there was a trouble that a display could not be read in a dark location. For this reason, although outdoor daylight is used like usual high-reflective-liquid-crystal equipment in a bright location, the liquid crystal equipment of the format which enabled the check by looking of a display according to the internal light source is proposed in the dark location. This is carrying out the configuration which carried out sequential arrangement of a polarizing plate, a transfective reflecting plate, and the back light to the external surface of a liquid crystal panel observation-side and the opposite side as indicated by JP,57-049271,A, JP,57-049271,A, JP,57-049271,A, etc. With this liquid crystal equipment, if a reflective mold display is performed using the light which took in outdoor daylight and was reflected with the transfective reflecting plate and the perimeter becomes dark in being bright in the perimeter, the transparency mold display which enabled the check by looking of a display by the light which the back light was turned [light] on and made the transfective reflecting plate penetrate will be performed.

[0003] There are some which were indicated as another liquid crystal equipment by JP,8-292413,A which raised the brightness of a reflective mold display. This liquid crystal equipment is carrying out the configuration which carried out sequential arrangement of a transfective reflecting plate, a polarizing plate, and the back light to the external surface of a liquid crystal panel observation-side and the opposite side. If a reflective mold display is performed using the light which took in outdoor daylight and was reflected with the transfective reflecting plate and the perimeter becomes dark in being bright in the perimeter, the transparency mold display which enabled the check by looking of a display by the light which the back light was turned [light] on and made the polarizing plate and the transfective reflecting plate penetrate will be performed. Since there is no polarizing plate between a liquid crystal cell and a transfective reflecting plate when it is made such a configuration, a reflective mold display brighter than the liquid crystal equipment mentioned above is obtained.

[0004]

[Problem(s) to be Solved by the Invention] However, with the liquid crystal equipment indicated by above-mentioned JP,8-292413,A, since a transparence substrate intervenes between a liquid crystal layer and a transfective reflecting plate, there is a trouble that duplex projection, a blot of a display, etc. will occur.

[0005] Furthermore, also in a device which colorization of a liquid crystal display is required with development of a pocket device in recent years and OA equipment, and uses high-reflective-liquid-crystal equipment, colorization is required in many cases. However, by the method which combined the liquid crystal equipment indicated by the above-mentioned official report and a color filter, since the transfective

reflecting plate is arranged behind a liquid crystal panel, the thick transparency substrate of a liquid crystal panel intervenes between a liquid crystal layer, a color filter, and a transfective reflecting plate, duplex projection, a blot of a display, etc. occur with parallax, and there is a trouble that sufficient coloring cannot be obtained.

[0006] In order to solve this problem, in JP,9-258219,A, the reflective mold electrochromatic display equipment which arranges a reflecting plate so that a liquid crystal layer may be touched is proposed. However, with this liquid crystal equipment, if the perimeter becomes dark, a display cannot be recognized.

[0007] On the other hand, in JP,7-318929,A, the liquid crystal equipment of the transfective reflective mold which prepared the pixel electrode which serves as a transfective reflective film to the inside of a liquid crystal cell is proposed. However, with this liquid crystal equipment, a liquid crystal drive is performed using the same driving gear (for example, so-called X driver circuit and so-called Y driver circuit) also at the time of the time of a reflective mold display, and a transparency mold display, and the driver voltage corresponding to the same image data is fixed also at the time of a reflective mold display or a transparency mold display. However, according to research of invention-in-this-application persons, generally it sets to the liquid crystal equipment of this kind of transfective reflective mold, and the property of a reflection factor over the liquid crystal driver voltage at the time of a reflective mold display and the property of permeability over the liquid crystal driver voltage at the time of a transparency mold display are not in agreement. Consequently, with liquid crystal equipments, such as JP,7-318929,A, if liquid crystal driver voltage to the gradation of image data is set up so that good contrast and display concentration may be obtained in a driving gear at the time of a reflective mold display, at the time of a transparency mold display, neither good contrast nor display concentration will be obtained. On the contrary, when liquid crystal driver voltage to the gradation of image data is set up so that good contrast and display concentration may be obtained in a driving gear at the time of a transparency mold display, at the time of a reflective mold display, good contrast and display concentration have shortly the trouble of not being obtained.

[0008] This invention is made in view of an above-mentioned trouble, and neither the duplex projection by parallax, nor a blot of a display, etc. do not occur in the liquid-crystal equipment which can switch a reflective mold display and a transparency mold display, but let it be a technical problem to offer the electronic equipment which used the liquid-crystal equipment and its liquid-crystal equipment of the transfective reflective mold in which image display high-definition by high contrast is possible also at the time of a reflective mold display also at the time of a transparency mold display.

[0009]

[Means for Solving the Problem] The 1st and 2nd substrates of a pair transparent in order that the 1st liquid crystal equipment of this invention may solve the above-mentioned technical problem, The 1st transparent electrode formed in a field by the side of a liquid crystal layer pinched between these 1st and 2nd substrates, and said liquid crystal layer of said 1st substrate, The 2nd electrode which consists of a transfective reflection layer formed in a field by the side of said liquid crystal layer of said 2nd substrate, Said liquid crystal layer of said 2nd substrate, and a lighting system arranged in the opposite side, It is characterized by having a driving means which drives said 1st and 2nd electrodes so that liquid crystal driver voltage impressed to said liquid crystal layer through said 1st and 2nd electrodes in the time of lighting of this lighting system and an astigmatism LGT may be different from each other to the same image.

[0010] According to the 1st liquid crystal equipment of this invention, at the time of a reflective mold display, a transfective reflection layer (the 2nd electrode) reflects in a liquid crystal layer side outdoor daylight which carried out incidence from the 1st substrate side. Under the present circumstances, since a transfective reflection layer (the 2nd electrode) is arranged at a liquid crystal layer side of the 2nd substrate, duplex projection of a display or a blot of a display which there is almost no gap between a liquid crystal layer and a transfective reflection layer (the 2nd electrode), therefore originate in parallax do not generate it. On the other hand, light source light which it was emitted from a lighting system and carried out incidence from the 2nd substrate side at the time of a transparency mold display is penetrated to a liquid crystal layer side through a transfective reflection layer (the 2nd electrode). Therefore, in a dark

place, a bright display is attained using light source light.

[0011] Especially, by driving means, in the time of lighting of a lighting system, and an astigmatism LGT, the 1st and 2nd electrodes drive so that liquid crystal driver voltage impressed to a liquid crystal layer through the 1st and 2nd electrodes may be different from each other to the same image. Namely, since the property of a reflection factor over liquid crystal driver voltage at the time of a reflective mold display and the property of permeability over liquid crystal driver voltage at the time of a transparency mold display generally are not in agreement with liquid crystal equipment of a transfective reflective mold, Driving liquid crystal by driver voltage which suited a reflection factor property over driver voltage in the reflective mold display concerned at the time of a reflective mold display which carried out the astigmatism LGT of the lighting system by closing liquid crystal driver voltage like this invention if it is difference It becomes possible to drive liquid crystal by driver voltage which suited a permeability property over driver voltage in the transparency mold display concerned at the time of a transparency mold display which turned on a lighting system. Especially a thing for which level of liquid crystal applied voltage for giving a halftone indication of a white display and a black display is changed by a reflective mold display and transparency mold display is very useful.

[0012] The 1st and 2nd substrates of a pair transparent in order that the 2nd liquid crystal equipment of this invention may solve the above-mentioned technical problem, The 1st transparent electrode formed in a field by the side of a liquid crystal layer pinched between these 1st and 2nd substrates, and said liquid crystal layer of said 1st substrate, The 2nd transparent electrode formed between a transfective reflection layer formed in a field by the side of said liquid crystal layer of said 2nd substrate, and this transfective reflection layer and said liquid crystal layer, Said liquid crystal layer of said 2nd substrate, and a lighting system arranged in the opposite side, It is characterized by having a driving means which drives said 1st and 2nd electrodes so that liquid crystal driver voltage impressed to said liquid crystal layer through said 1st and 2nd electrodes in the time of lighting of this lighting system and an astigmatism LGT may be different from each other to the same image.

[0013] According to the 2nd liquid crystal equipment of this invention, at the time of a reflective mold display, a transfective reflection layer reflects in a liquid crystal layer side outdoor daylight which carried out incidence from the 1st substrate side. Under the present circumstances, since a transfective reflection layer is arranged at a liquid crystal layer side of the 2nd substrate, duplex projection of a display or a blot of a display which there is almost no gap between a liquid crystal layer and a transfective reflection layer, therefore originate in parallax do not generate it. On the other hand, light source light which it was emitted from a lighting system and carried out incidence from the 2nd substrate side at the time of a transparency mold display is penetrated to a liquid crystal layer side through a transfective reflection layer. Therefore, in a dark place, a bright display is attained using light source light.

[0014] Especially, by driving means, in the time of lighting of a lighting system, and an astigmatism LGT, the 1st and 2nd electrodes drive so that liquid crystal driver voltage impressed to a liquid crystal layer through the 1st and 2nd electrodes may be different from each other to the same image. It becomes possible to drive liquid crystal by the driver voltage which suited the reflection factor property over driver voltage in the transparency mold display concerned on the occasion of a transparency mold display which turned on a lighting system, driving liquid crystal by the driver voltage which suited the reflection factor property over driver voltage in the reflective mold display concerned on the occasion of a reflective mold display which carried out the astigmatism LGT of the lighting system like the case of the 1st liquid-crystal equipment of this invention which this mentioned above.

[0015] In addition, as a drive method of the 1st and 2 liquid-crystal equipment, various drive methods with well-known passive matrix drive method, TFT (Thin Film Diode) active-matrix drive method, TFD (Thin Film Diode) active-matrix drive method, segment drive method, etc. are employable. Moreover, since it will drive as display mode so that liquid crystal equipment may be in a dark condition at the time of un-driving if the former is adopted although NOMA reeve rack mode or any in no MARI White mode is sufficient, at the time of a transparency mold display, optical leakage between pixels which liquid crystal does not drive, or from between dots can be suppressed, and contrast can obtain a high transparency mold display. Moreover,

since the unnecessary reflected light can be stopped between pixels and from between dots to a display at the time of a reflective mold display, a display with high contrast can be obtained.

[0016] In a mode of 1 of the 1st of this invention, and the 2nd liquid crystal equipment, said transfective reflection layer consists of a reflective film with which opening which can penetrate light from said lighting system was prepared in each pixel, respectively.

[0017] Since light from a lighting system can penetrate about each pixel through opening prepared in a transfective reflection layer according to this mode, a transparency mold display using a lighting system is attained. Moreover, by reflective film portion which separated from opening, since outdoor daylight is reflected through liquid crystal, a reflective mold display using outdoor daylight is attained. In addition, or it was regularly arranged on the surface of for example, a reflective film as such opening, a rectangular slit and a rectangular detailed opening with which it was dotted irregularly, a hole defect, a reentrant defect, etc. are sufficient. Or you may constitute so that two or more reflective films may be formed the shape of a stripe, and in the shape of an island and light may penetrate by using as opening a gap of a reflective film which adjoins each other. Moreover, as a material of a reflective film, if it is the metal which aluminum (aluminum) can make reflect outdoor daylight of light fields, such as Cr (chromium) and Ag (silver), although a metal of a principal component is used, especially the material will not be limited. For example, if a reflective film is constituted including 95% of the weight or more of aluminum so that thickness may be 10nm or more 40nm or less, permeability is 40% or less more than per %, and a reflector of a transfective reflective mold whose reflection factor is 95% or less 50% or more can be produced.

[0018] On the other hand, as for a path of opening, it is desirable that it is [0.01 micrometer or more] 20 micrometers or less. By doing in this way, it is difficult for human being to recognize, and a reflective mold display and a transparency mold display are realizable for coincidence, suppressing deterioration of display quality produced by having prepared opening. Moreover, as for opening, it is desirable to form by 30% or less of surface ratio 5% or more to a reflective film. A transparency mold display is realizable with light from which suppressing a fall of brightness of a reflective mold display is introduced into a liquid crystal layer through opening of a reflective film with **** by doing in this way. Such an opening is easily producible at the photograph production process / development production process / exfoliation production process of having used a resist.

[0019] Especially, since it has both a function in which a transfective reflection layer (the 2nd electrode) which consists of such a reflective film reflects outdoor daylight in the case of the 1st liquid crystal equipment of this invention, and a function to impress voltage to liquid crystal, as compared with a case where a reflective film and a pixel electrode are formed separately, a manufacture or layout top of an equipment configuration top is also advantageous, and low cost-ization can be attained. On the other hand, in the case of the 1st liquid crystal equipment of this invention, since it is not necessary to prepare opening in the 2nd transparent electrode, equipment reliability about the 2nd electrode concerned and a manufacture yield increase.

[0020] In other modes of the 1st of this invention, and the 2nd liquid crystal equipment, said driving means is equipped with a 1st supply means supply voltage to said 1st electrode, and the 1st control means which controls said 1st supply means to switch voltage which this 1st supply means supplies at a setup for a transparency mold display according to a switch and said lighting according to said astigmatism LGT to a setup for a reflective mold display, respectively.

[0021] According to this mode, voltage is supplied to the 1st electrode (for example, scanning line) by the 1st supply means (for example, Y driver circuit), but under control by the 1st control means, according to an astigmatism LGT of a lighting system, this voltage supplied is switched to a setup for a reflective mold display, and is switched to a setup for a transparency mold display according to lighting of a lighting system on the other hand. Therefore, liquid crystal can be driven by driver voltage which suited a reflection factor property and a permeability property over driver voltage, respectively at the time of a reflective mold display and a transparency mold display.

[0022] It has further a lighting means for switching which switches said lighting in said lighting system, and said astigmatism LGT, and synchronizing with switch actuation by this lighting means for switching, said 1st

control means may consist of this mode so that voltage which said 1st supply means supplies may be switched to a setup for a reflective mold display, or a setup for a transparency mold display.

[0023] In other modes of the 1st of this invention, and the 2nd liquid crystal equipment, said driving means is equipped with a 2nd supply means supply voltage to said 2nd electrode, and the 2nd control means which controls said 2nd supply means to switch voltage which this 2nd supply means supplies at a setup for a transparency mold display according to a switch and said lighting according to said astigmatism LGT to a setup for a reflective mold display, respectively.

[0024] According to this mode, voltage is supplied to the 1st electrode (for example, data line) by the 2nd supply means (for example, X driver circuit), but under control by the 1st control means, according to an astigmatism LGT of a lighting system, this voltage supplied is switched to a setup for a reflective mold display, and is switched to a setup for a transparency mold display according to lighting of a lighting system on the other hand. Therefore, liquid crystal can be driven by driver voltage which suited a reflection factor property and a permeability property over driver voltage, respectively at the time of a reflective mold display and a transparency mold display.

[0025] Said 2nd supply means may supply voltage which has actual value of magnitude according to gradation level which gradation data shows to said 2nd electrode, and said 2nd control means may control said 2nd supply means by this mode to switch a setup of each magnitude of said actual value over each gradation level at a setup for a transparency mold display according to a switch and said lighting according to said astigmatism LGT to a setup for a reflective mold display.

[0026] Thus, if constituted, under control by the 2nd control means, a setup of each magnitude of actual value over each gradation level will be switched to a setup for a reflective mold display according to an astigmatism LGT, and will be switched to a setup for a transparency mold display according to lighting of an another side lighting system. And voltage which has actual value of magnitude according to gradation level which gradation data shows with the 2nd supply means is supplied to said 2nd electrode. Therefore, it crosses especially throughout gradation and liquid crystal can be driven by good driver voltage.

[0027] In other modes of the 1st of this invention, and the 2nd liquid crystal equipment, it has a color filter further between said transfective reflection layer and said 1st substrate, respectively.

[0028] According to this mode, reflective mold color display by outdoor daylight and transparency mold color display using a lighting system can be performed. As for a color filter, it is desirable to have 25% or more of permeability to all light of the 380nm or more wavelength range of 780nm or less. By doing in this way, bright reflective mold color display and transparency mold color display are realizable.

[0029] In other modes of the 1st of this invention, and the 2nd liquid crystal equipment, said transfective reflection layer has irregularity, respectively.

[0030] According to this mode, therefore a feeling of a mirror plane of a reflector can be lost unevenly, and it can be shown as the diffusing surface (white side). Moreover, a display of a wide-field-of-view angle is attained by dispersion by irregularity. The shape of this toothing can be formed by forming or damaging the glass substrate of a substrate itself by fluoric acid using photosensitive acrylic resin etc., on a substrate of a reflector. In addition, it is desirable to form a transparent flattening film further on the concavo-convex surface of a reflector, and to carry out flattening of the surface (surface which forms an orientation film) facing a liquid crystal layer from a viewpoint which prevents the poor orientation of liquid crystal.

[0031] It is characterized by equipping electronic equipment of this invention with liquid crystal equipment of this invention mentioned above, in order to solve the above-mentioned technical problem.

[0032] According to electronic equipment of this invention, there is no blot of duplex projection and a display by parallax, and various kinds of electronic equipment using transfective high-reflective-liquid-crystal equipment and transfective reflective mold electrochromatic display equipment which can switch and display a reflective mold display and a transparency mold display can be realized. Such electronic equipment can realize a display high-definition by related especially high contrast to surrounding outdoor daylight also in a location dark also in a bright location.

[0033]

[Embodiment of the Invention] Hereafter, the gestalt of operation of this invention is explained with

reference to a drawing.

[0034] (The 1st operation gestalt) The 1st operation gestalt of the liquid crystal equipment concerning this invention is explained with reference to drawing 7 from drawing 1. Drawing 1 (a) is the outline drawing of longitudinal section showing the structure of the 1st operation gestalt of this invention. Drawing 1 (b) It is the outline plan of the 1st operation gestalt shown in drawing 1 (a), and drawing 2 - drawing 6 are the expansion plans showing various kinds of examples of opening prepared in the reflector in the 1st operation gestalt, respectively. Drawing 7 It is property drawing showing the property of the reflection factor R at the time of the reflective mold display to the driver voltage in the liquid crystal equipment of the 1st operation gestalt, and the property of the permeability T at the time of a transparency mold display. Although the color filter and black matrix layer which were shown in drawing 1 (a) are omitted and it has shown only three every direction at a time also about the electrode of the shape of an expedient top stripe of explanation by drawing 1 (b) in order to make electrode disposition legible, the electrode of the shape of many [far] numbers of a stripe prepares with actual liquid crystal equipment, and it is ****. In addition, although the 1st operation gestalt is fundamentally related with the liquid crystal display of a passive-matrix mold, it is possible to apply also to the equipment of a active-matrix mold, the equipment of other segmental dies, and other liquid crystal equipments by the same configuration.

[0035] As shown in drawing 1 (a) and drawing 1 (b), with the 1st operation gestalt, the liquid crystal cell to which the closure of the liquid crystal layer 3 was carried out by the frame-like sealant 4 is formed between two transparence substrates 1 and 2. The liquid crystal layer 3 consists of nematic liquid crystals with a predetermined twist angle. A color filter 5 is formed on the inside of the front transparence substrate 1, and the coloring layer of three colors of R (red), G (green), and B (blue) is arranged by this color filter 5 by the predetermined pattern. The transparent protective coat 10 is covered on the surface of a color filter 5, and the transparent electrode 6 of the shape of two or more stripe is formed with the ITO (Indium TinOxide) film etc. on the surface of a protective coat 10. The orientation film 9 is formed on the surface of a transparent electrode 6, and rubbing processing is performed in the predetermined direction.

[0036] On the other hand, on the inside of the back transparence substrate 2, two or more arrays are carried out so that the reflector 7 of the shape of a stripe formed for every coloring layer of the above-mentioned color filter 5 may intersect the above-mentioned transparent electrode 6. When it is equipment of the active-matrix mold equipped with the TFD element or the TFT element, each reflector 7 is formed in the shape of a rectangle, and is connected to wiring through an active element. This reflector 7 is formed of Cr, aluminum, etc., and that surface is the reflector in which the light which carries out incidence is reflected from the transparence substrate 1 side. On the surface of a reflector 7, the same orientation film 19 as the above is formed. Much opening 7b (refer to drawing 1 (b)) of the diameter of 2 micrometer is prepared in the reflector 7, and the gross area of opening 7b is prepared in it at about 10% of a rate to the gross area of a reflector 7.

[0037] With reference to drawing 2 - drawing 6, various kinds of examples of a reflector 7 and opening 7b are explained here.

[0038] As first shown in drawing 2, the transparent electrode 802 (it corresponds to the transparent electrode 6 of drawing 1) of the shape of a stripe formed in the upper transparence substrate is countered, and the rectangular slit 803 (it corresponds to opening 7b of drawing 1) may be formed in the reflector 802 (it corresponds to the reflector 7 of drawing 1) of the shape of a stripe formed on the lower transparence substrate. In addition, a square, a rectangle, or other polygons and round shapes are sufficient as the rectangular slit 803. Furthermore, also about arrangement or direction, as long as at least one opening is prepared in each dot (namely, field where a transparent electrode 801 and a reflector 802 cross among drawing 2), it may be arranged regularly and may be dotted irregularly.

[0039] the hole with which the reflector 602 (it corresponds to the reflector 7 of drawing 1) of the shape of a stripe which countered the transparent electrode 601 (it corresponds to the transparent electrode 6 of drawing 1) of the shape of a stripe formed in the upper transparence substrate, and was formed on the lower transparence substrate as shown in drawing 3 is dotted irregularly — the detailed defective parts

603 (it corresponds to opening 7b of drawing 1), such as a defect and a reentrant defect, may be formed. [0040] As shown in drawing 4 , the transparent electrode 301 (it corresponds to the transparent electrode 6 of drawing 1) of the shape of a stripe formed in the upper transparence substrate is countered, the predetermined gap 303 (it corresponds to opening 7b of drawing 1) may be separated, and the reflector 303 (it corresponds to the reflector 7 of drawing 1) of the shape of a stripe formed on the lower transparence substrate may be arranged. That is, the light from a back light 15 is introduced into the liquid crystal layer 3 through this gap 303.

[0041] Although the 1st operation gestalt starts simple (passive) matrix mold liquid crystal equipment here for example, in the case of the liquid crystal equipment of the transfective reflective mold of the TFD active-matrix drive method mentioned later From the same view as the example of drawing 4 , as shown in drawing 5 , the transparent electrode 201 (it corresponds to the transparent electrode 6 of drawing 1) of the shape of a stripe formed in the upper transparence substrate is countered. The predetermined gap 205 (it corresponds to opening 7b of drawing 1) may be separated, and the reflector 204 (it corresponds to the reflector 7 of drawing 1) of the shape of an island formed for every dot on the lower transparence substrate may be arranged. That is, the light from a back light 15 is introduced into the liquid crystal layer 3 through this gap 205. In addition, in this case, the scanning line 202 is formed on a bottom transparence substrate, the TFD element 203 is further formed corresponding to each dot, and the scanning line 202 and a reflector 204 are connected through the TFD element 203.

[0042] furthermore, in the case of the liquid crystal equipment of the transfective reflective mold of the TFT active-matrix drive method mentioned later, for example From the same view as the example of drawing 4 , as shown in drawing 6 , the transparent electrode 1401 (it corresponds to the transparent electrode 6 of drawing 1) formed in the upper transparence substrate is countered. The predetermined gap 1406 (it corresponds to opening 7b of drawing 1) may be separated, and the reflector 1405 (it corresponds to the reflector 7 of drawing 1) of the shape of an island formed for every dot on the lower transparence substrate may be arranged. That is, the light from a back light 15 is introduced into the liquid crystal layer 3 through this gap 1406. In addition, in this case, on a bottom transparence substrate, the data line 1402 and the scanning line 1403 are formed, the TFT element 1404 is further formed corresponding to each dot, and the data line 1402 and the scanning line 1403, and a reflector 1405 are connected through the TFT element 1404.

[0043] As again shown in drawing 1 (a) and drawing 1 (b), a polarizing plate 11 is arranged on the external surface of the front transparence substrate 1, and the phase contrast board 13 is arranged between the polarizing plate 11 and the transparent electrode 1. Moreover, behind the liquid crystal cell, the phase contrast board 14 is arranged behind the transparence substrate 2, and the polarizing plate 12 is arranged behind this phase contrast board 14. And behind the polarizing plate 12, the back light 15 which has fluorescence pipe 15a which emits the white light, and light guide plate 15b equipped with the incidence end face in alignment with this fluorescence pipe 15a is arranged. Light guide plate 15b is the transparent bodies, such as an acrylic resin board with which the split face for dispersion was formed in the whole rear face, or the printing layer for dispersion was formed, and it is constituted so that an almost uniform light may be emitted from the upper surface of drawing in response to the light of fluorescence pipe 15a which is the light source in an end face. As other back lights, LED (light emitting diode), EL (electroluminescence), etc. can be used.

[0044] With the 1st operation gestalt, in order to prevent light leaking from field 7a between each reflector 7 at the time of a transparency mold display, superficially, black matrix layer 5a which is the protection-from-light section formed between each coloring layer of a color filter 5 corresponds mostly, and is prepared. Black matrix layer 5a puts Cr layer, or forms it by photosensitive black resin.

[0045] Next, actuation of the 1st operation gestalt constituted as mentioned above is explained.

[0046] First, a reflective mold display is explained. The polarizing plate 11 in drawing 1 , the phase contrast board 13, and a color filter 5 are penetrated, respectively, it is reflected by the reflector 7 after passing the liquid crystal layer 3, and outgoing radiation of the outdoor daylight is again carried out from a polarizing plate 11. At this time, those middle brightness is controlled according to the applied voltage to the liquid

crystal layer 3 in transparency (*****) and absorption (dark condition) list of a polarizing plate 11.

[0047] Next, a transparency mold display is explained. With a polarizing plate 12 and the phase contrast board 14, the light from a back light 15 turns into predetermined polarization, is introduced into the liquid crystal layer 3 from opening 7b of a reflector 7, and penetrates a color filter 5 and the phase contrast board 13 after passing the liquid crystal layer 3, respectively. At this time, those middle brightness is controlled according to the applied voltage to the liquid crystal layer 3 in transparency (*****) and absorption (dark condition) list of a polarizing plate 11.

[0048] Here, as shown in drawing 7, generally in the liquid crystal equipment of the transreflective reflective mold like the 1st operation gestalt, it has become clear that the property of the reflection factor R at the time of the reflective mold display to driver voltage and the property of the permeability T at the time of a transparency mold display are so-called difference as a result of the research and the experiment by invention-in-this-application persons. That is, if it is going to drive the liquid crystal equipment of this kind of transreflective reflective mold by fixed driver voltage to the same image, without being temporarily based on lighting and the astigmatism LGT of a back light 15, in order to perform a high gradation display only about either at the time of a reflective mold display and a transparency mold display, or in order to raise contrast, the most of the slope of the **** characteristic curve shown in drawing 7 can be made. However, with this operation gestalt, in the time of lighting of a back light 15, and an astigmatism LGT, a transparent electrode 6 and a reflector 7 drive so that the liquid crystal driver voltage impressed to the liquid crystal layer 3 through a transparent electrode 6 and a reflector 7 may be different from each other to the same image. That is, with this operation gestalt, the liquid crystal layer 3 drives by the driver voltage which suited the property of the reflection factor R as shown in drawing 7 at the time of the reflective mold display which carried out the astigmatism LGT of the back light 15, and liquid crystal drives by the driver voltage which suited the property of the permeability T as shown in drawing 7 at the time of the transparency mold display which turned on the back light 15. Especially the thing for which the level of the liquid crystal applied voltage for giving a halftone indication of a white display and a black display is changed by a reflective mold display and transparency mold display is very useful. A setup of the driver voltage which suits a setup of the driver voltage which suits the property of these reflection factors R, and the property of permeability T is performed comparatively easily by searching for beforehand the property of the reflection factor R for every driver voltage, and the property of permeability T experimentally, experientially, and theoretically about each liquid crystal equipment, respectively. In addition, the concrete configuration of the driving gear which performs such a drive is explained in full detail as the 3rd operation gestalt.

[0049] According to this operation gestalt mentioned above, a reflective mold display and a transparency mold display without duplex projection or a blot of a display can be switched and displayed, and electrochromatic display equipment high-definition by high contrast can be especially realized also in any of a reflective mold display and a transparency mold display.

[0050] In addition, according to the 1st operation gestalt, also in any of a reflective mold display and a transparency mold display, a good display control is made with polarizing plates 11 and 12. And while reducing the effect of the color tones on coloring which originates in the wavelength dispersion of the light at the time of a reflective mold display with the phase contrast board 13, it becomes possible to reduce the effect of the color tones on coloring which originates in the wavelength dispersion of the light at the time of a transparency mold display with the phase contrast board 14. Moreover, about the phase contrast boards 13 and 14, it is also possible to arrange about two or more phase reference boards in each location according to coloring compensation of a liquid crystal cell or viewing-angle compensation.

[0051] Furthermore, it is not flat in a reflector 7, for example, you may constitute from this operation gestalt mentioned above so that it may have the irregularity whose difference of elevation is about 0.8 micrometers. Thus, if constituted, therefore the feeling of a mirror plane of a reflector 17 can be lost unevenly, it can be shown as the diffusing surface (white side), and the display of a wide-field-of-view angle will be attained by dispersion by irregularity. On the other hand, the optical diffusion board of the transparency mold which consists of a thing of an internal diffusion form which distributed the transparent particle from which a refractive index differs in transparency bases, such as acrylic resin, between the

phase contrast board 13 and the transparence substrate 1, and a thing of the surface diffusion form which split-face-ized the surface top of a transparence base (mat-izing) may be arranged. Thus, if constituted, reflected [the outdoor daylight by direct reflection of a reflector 7] can be prevented, and visibility can be raised. Furthermore, in case much detailed pores may be formed using vacuum evaporatio~~no~~, sputtering, a photolithography production process, etc., an indication is given bright in case this performs a transparency mold display, and a reflective mold display is performed to a reflector 7, it can prevent reflected [outdoor daylight].

[0052] (The 2nd operation gestalt) The 2nd operation gestalt of the liquid crystal equipment concerning this invention is explained with reference to drawing 8 and drawing 9. Drawing 8 is the outline drawing of longitudinal section showing the structure of the 2nd operation gestalt of this invention, drawing 9 (a) is the expansion plan showing an example of the reflector concerning the 2nd operation gestalt, and drawing 9 (b) is the expansion plan showing other examples of this reflector. The reference mark same about the same component as the 1st operation gestalt shown in drawing 1 is attached among drawing 8, and the explanation is omitted. In addition, although this operation gestalt is fundamentally related with the liquid crystal display of a passive-matrix mold, it is possible to apply also to the equipment of a active-matrix mold, the equipment of other segmental dies, and other liquid crystal equipments by the same configuration.

[0053] As shown in drawing 8, with the 2nd operation gestalt, it is not the reflector of a monolayer with which the 2nd electrode on a bottom substrate has opening compared with the 1st operation gestalt. Consist of a transparent electrode prepared on the transfective reflecting plate which has opening. (That is, the 1st electrode achieves only an electrode function and the reflective film prepared separately achieves a transfective reflex function) Points differ and it mainly differs further in that the color filter and the black matrix layer are prepared on the bottom substrate. About other configurations, it is the same as that of the case of the 1st operation gestalt fundamentally.

[0054] Namely, as shown in drawing 8, in the transparence substrate 1 side, rubbing processing is performed to the orientation film 19 in the predetermined direction, and the liquid crystal molecule has the pre tilt angle of about 85 degrees in the direction of rubbing. When it is equipment of the active-matrix mold equipped with the TFD element or the TFT element, a transparent electrode 6 is formed in the shape of a rectangle, and is connected to wiring through an active element.

[0055] On the other hand, on the inside of the lower transparence substrate 2, the irregularity of about 0.8 micrometers of high lowness is formed with photosensitive acrylic resin, on the surface, the spatter of the aluminum which added 1.0% of the weight of Nd is carried out by the thickness of 25nm, and the transfective reflecting plate 411 is formed. On the transfective reflecting plate 411, a color filter 414 is formed through a protective coat 412, and the coloring layer of three colors of R (red), G (green), and B (blue) is arranged by this color filter 414 by the predetermined pattern. The transparent protective coat is covered on the surface of a color filter 414, and the transparent electrode 416 of the shape of two or more stripe is formed of ITO etc. on the surface of this protective coat. Two or more arrays are carried out so that the transparent electrode 416 of the shape of a stripe formed for every coloring layer of a color filter 414 may intersect the above-mentioned transparent electrode 6. On the surface of a transparent electrode 416, the same orientation film 19 as the above is formed. In addition, rubbing processing is not performed to this orientation film 19. As phase contrast boards 13 and 14, especially a quarter-wave length board is used, respectively.

[0056] Furthermore with the 2nd operation gestalt, the transparency shafts P1 and P2 of a polarizing plate 11 and a polarizing plate 12 are set up in this direction. The direction of the lagging axes C1 and C2 of the phase contrast boards (namely, quarter-wave length board) 13 and 14 is set up in the direction rotated clockwise $\theta = 45$ degrees to the transparency shafts P1 and P2 of these polarizing plates 11 and 12, respectively. Furthermore, the direction R1 of rubbing processing of the orientation film 9 on the inside of the transparence substrate 1 is also given in the direction of the lagging axes C1 and C2 of the phase contrast boards (namely, quarter-wave length board) 13 and 14, and the direction in agreement. This direction R1 of rubbing specifies the falling direction of [at the time of electric-field impression of the liquid crystal layer 3]. A dielectric anisotropy uses a negative pneumatic liquid crystal for the liquid crystal

layer 3.

[0057] Furthermore, with the 2nd operation gestalt, in order to prevent light leaking from the field between each dot at the time of a transparency mold display, superficially, the black matrix layer 413 which is the protection-from-light section formed between each coloring layer of a color filter 414 corresponds mostly, and is prepared. The black matrix layer 413 puts Cr layer, or forms it by photosensitive black resin.

[0058] The same orientation as the case of the 1st operation gestalt indicated to be the property of the reflection factor R at the time of the reflective mold display to the driver voltage in the liquid crystal equipment of the 2nd operation gestalt constituted as mentioned above and the property of the permeability T at the time of a transparency mold display to drawing 7 is shown. In addition, in case the liquid crystal equipment of the 2nd operation gestalt is driven, the display condition at the time of no electric-field impressing is dark (black). If it drives in NOMA reeve rack mode, since the optical leakage and the unnecessary reflected light from the gap of the transparent electrode 416 which liquid crystal does not drive can be stopped, it becomes unnecessary thus, to form the black matrix layer 413.

[0059] Next, actuation of the 2nd operation gestalt constituted as mentioned above is explained.

[0060] First, a reflective mold display is explained. The polarizing plate 11 in drawing 8 and the phase contrast board 13 are penetrated, respectively, and after passing the liquid crystal layer 3, a color filter 414 is passed, it is reflected by the transfective reflecting plate 411, and outgoing radiation of the outdoor daylight is again carried out from a polarizing plate 11. At this time, those middle brightness is controlled according to the applied voltage to the liquid crystal layer 3 in transparency (*****) and absorption (dark condition) list of a polarizing plate 11.

[0061] Next, a transparency mold display is explained. With a polarizing plate 12 and the phase contrast board 14, the light from a back light 15 turns into predetermined polarization (the circular polarization of light, elliptically polarized light, or linearly polarized light), is introduced into the liquid crystal layer 3 from the transfective reflecting plate 411, and penetrates the phase contrast board 13 after passing the liquid crystal layer 3. At this time, transparency (*****), absorption (dark condition), and its middle brightness of a polarizing plate 11 are controllable according to the applied voltage to the liquid crystal layer 3.

[0062] Here, like the case of the 1st operation gestalt, also in the 2nd operation gestalt, in the time of lighting of a back light 15, and an astigmatism LGT, a transparent electrode 6 and a transparent electrode 416 drive so that the liquid crystal driver voltage impressed to the liquid crystal layer 3 through a transparent electrode 6 and a transparent electrode 416 may be different from each other to the same image. That is, with this operation gestalt, the liquid crystal layer 3 drives by the driver voltage which suited the property of the reflection factor R as shown in drawing 7 at the time of the reflective mold display which carried out the astigmatism LGT of the back light 15, and liquid crystal drives by the driver voltage which suited the property of the permeability T as shown in drawing 7 at the time of the transparency mold display which turned on the back light 15. In addition, the concrete configuration of the driving gear which performs such a drive is explained in full detail as the 3rd operation gestalt.

[0063] According to this operation gestalt mentioned above, a reflective mold display and a transparency mold display without duplex projection or a blot of a display can be switched and displayed, and electrochromatic display equipment high-definition by high contrast can be especially realized also in any of a reflective mold display and a transparency mold display.

[0064] Moreover, aluminum forms the color filter layer, the protective coat, and the transparent electrode for this surface a cover and on it by the protective coat at the transfective reflecting plate 411 of the 2nd operation gestalt using the metal layer of a principal component. For this reason, since aluminum metal layer touches neither with a direct ITO developer nor a color filter developer, aluminum metal layer does not dissolve with a developer. Furthermore, aluminum metal layer which a blemish tends to attach can be made easy to deal with it. aluminum of 25nm thickness which added 1.0% of the weight of Nd shows the value of 80% of reflection factors, and 10% of permeability, and can check fully functioning as a transfective reflecting plate 411.

[0065] Moreover, since the transfective reflecting plate 411 which gave irregularity can reflect the reflected light in a wide angle, it can realize the liquid crystal equipment of a wide-field-of-view angle.

[0066] Here, the example about a transparent electrode 416 established the transfective reflecting plate 411 which has opening, and on this is explained with reference to drawing 9.

[0067] First, by the 1st example, as shown in drawing 9 (a), transparent electrode 602' (it corresponds to the transparent electrode 6 of drawing 8) of the shape of a stripe formed in the upper transparency substrate from ITO etc. is countered. Two or more formation of reflecting plate 602' (it corresponds to the transfective reflecting plate 411 of drawing 8) of width of face W1 is carried out by the shape of a stripe from aluminum etc. on a lower transparency substrate. Furthermore, two or more formation of transparent electrode 603' (it corresponds to the transparent electrode 416 of drawing 8) of the somewhat larger width of face W2 (namely, $W2 > W1$) than reflecting plate 602' is carried out by the shape of a stripe from ITO etc. Consequently, the portion of the width of face of W1-W1 functions as opening on each reflecting plate 602' of every. That is, the transparency of the light from a back light 15 is attained in the field in which it sees superficially in this way, and reflecting plate 602' is not formed in, and the transparent electrode 416 is formed, and it becomes possible to perform a transparency mold display by this field. On the other hand, reflection of outdoor daylight is attained in the field in which it sees superficially in this way, and reflecting plate 602' is formed in, and the transparent electrode 416 is formed, transparency becomes possible, and it becomes possible to perform a reflective mold display by this field.

[0068] Next, by the 2nd example, as shown in drawing 9 (b), on the lower transparency substrate, two or more formation of the island-like reflecting plate 503 (it corresponds to the transfective reflecting plate 411 of drawing 8) is carried out from aluminum etc., and the somewhat larger thing transparent electrode 504 (it corresponds to the transparent electrode 416 of drawing 8) than a reflecting plate 503 is further formed according to the shape of an island from ITO etc. Consequently, the portion of that perimeter functions as opening every reflecting plate 503. That is, the transparency of the light from a back light 15 is attained in the field in which it sees superficially in this way, and a reflecting plate 503 is not formed in, and the transparent electrode 504 is formed, and it becomes possible to perform a transparency mold display by this field. On the other hand, reflection of outdoor daylight is attained in the field in which it sees superficially in this way, and the reflecting plate 503 is formed in, and the transparent electrode 504 is formed, transparency becomes possible, and it becomes possible to perform a reflective mold display by this field. In addition, this example is for TFD active ** matrix drive methods, and each transparent electrode 504 is connected to each scanning line 501 through the TFD element 502. The transfective reflecting plate and transparent electrode of liquid crystal equipment of a TFT active-matrix drive method can be formed on a bottom transparency substrate almost like this modification.

[0069] By the example explained using drawing 9, respectively, since the light which carried out incidence in addition to the pixel electrode or the dot electrode is unrelated to a display and the contrast of a transparency mold display is only reduced, it is making display mode of a protection-from-light film (black matrix layer) or a liquid crystal layer into Nor Marie Black, and intercepting is desirable.

[0070] The Rhine width of face (L) of transparent electrode 601' which consists of ITO in the example of drawing 9 (a) 198 micrometers, the bottom -- a substrate -- an inside -- aluminum -- from -- becoming -- a reflecting layer -- 602 -- ' -- Rhine -- width of face (W1) -- 46 -- micrometer -- the -- a top -- having formed -- ITO -- from -- becoming -- a transparent electrode -- 603 -- ' -- Rhine -- width of face (W2) -- 56 -- micrometer -- ** -- carrying out -- if -- About 70% of the outdoor daylight introduced into the liquid crystal layer can be reflected, outgoing radiation can be carried out from a back light, and about 10% of the light introduced into the lower transparency substrate can be made to penetrate.

[0071] Moreover, since aluminum reflecting layer of this operation gestalt formed the ITO transparent electrode in the surface, a blemish can be made hard to attach to aluminum reflecting layer, and since two, aluminum reflecting layer and an ITO transparent electrode, become electrode Rhine, low resistance-ization of electrode Rhine of it is attained.

[0072] (The 3rd operation gestalt) Next, the 3rd operation gestalt concerning liquid crystal equipment including the drive circuit which drives the liquid crystal equipment of the 1st and 2nd operation gestalt of this invention mentioned above is explained with reference to the block diagram of drawing 10.

[0073] In drawing 10, liquid crystal equipment is equipped with the driving gear which drives the liquid

crystal panel (it corresponds to the liquid crystal equipment in the 1st and 2nd operation gestalt mentioned above) 103 having a back light 15, the light source driving gear 108 which drives a back light 15, and the lighting switching unit 107 which switches lighting and the astigmatism LGT of a back light 15, and is constituted.

[0074] Data-line drive control circuit 110a as an example of the 2nd control means which controls the driver voltage of the X driver circuit 110 as an example of the 2nd supply means which drives the data line with which especially the driving gear was wired by the liquid crystal panel 103, and the X driver circuit 110. It has scanning-line drive control circuit 100a as an example of the 1st control means which controls the scanning-line driver voltage in the Y driver circuit 100 and the Y driver circuit 100 as an example of the 1st supply means which drives the scanning line wired by the liquid crystal panel 103, and is constituted. Data-line drive control circuit 110a will output the data-line drive control signal S1 to the X driver circuit 110 based on these input signals, if a picture signal Sv and the display-control signal Ss are inputted from an external picture signal processing circuit. In response, the X driver circuit 110 drives each data line by supplying a picture signal to each data line to predetermined timing. Scanning-line drive control circuit 100a will output the scanning-line drive control signal S2 to the Y driver circuit 100 based on this input signal, if the display-control signal Ss is inputted from an external picture signal processing circuit. In response, the Y driver circuit 100 drives each scanning line by supplying a scan signal to each scanning line to predetermined timing.

[0075] A back light 15 and the light source driving gear 108 constitute an example of a lighting system. In response to the lighting change over signal SL from the lighting switching unit 107, the light source driving gear 102 supplies the light source driver voltage VL to a back light 15 alternatively. In response, a back light 15 irradiates the liquid crystal layer in a liquid crystal panel 103 through a transfective reflection layer as mentioned above.

[0076] manual switch actuation the lighting switching unit 107 constitutes an example of a lighting means for switching, and according lighting and the astigmatism LGT of a back light 15 to an operator -- or the lighting change over signal SL is outputted to the light source driving gear 108 by detecting outdoor daylight level. namely, manual actuation according to an operator in a bright place -- or the lighting change over signal SL of the purport to which the astigmatism LGT of the back light 15 is carried out automatically is outputted to the light source driving gear 108 by detection of outdoor daylight level, and the reflective mold display by outdoor daylight is performed, without turning on a back light 15. on the other hand, manual actuation according to an operator in a dark place -- or the lighting change over signal SL of the purport which makes a back light 15 turn on automatically is outputted to the light source driving gear 108 by detection of outdoor daylight level, the light source driver voltage VL is supplied, a back light 15 is turned on, and a transparency mold display is performed.

[0077] The driving gear which becomes **** from the **** X driver circuit 110, data-line drive control circuit 110a, the Y driver circuit 100, and scanning-line drive control circuit 110a is with the time of lighting of a back light 15, and an astigmatism LGT, and it consists of especially this examples so that the liquid crystal driver voltage impressed to a liquid crystal layer through the scanning line and the data line may be different from each other to the same image based on the lighting change over signal SL outputted from the lighting switching unit 107, and the scanning line and the data line may be driven.

[0078] More specifically data-line drive control circuit 110a If the lighting change over signal SL outputted from the lighting switching unit 107 is inputted, it is based on the signal level. At the time of the astigmatism LGT of a back light 15 A voltage setup of the picture signal which the X driver circuit 110 supplies to the data line to the gradation level (or white and black level) specified by the picture signal Sv is switched to a voltage setup optimized for [which was set up beforehand] the reflective mold display based on the property of the reflection factor R like drawing 7 . It replaces with this, or in addition, scanning-line drive control circuit 100a will switch a voltage setup of the scan signal which the Y driver circuit 100 supplies to the scanning line to a voltage setup optimized for [which was set up beforehand] the reflective mold display based on the property of the reflection factor R like drawing 7 based on the signal level at the time of the astigmatism LGT of a back light 15, if the lighting change over signal SL

outputted from the lighting switching unit 107 is inputted. Furthermore, data-line drive control circuit 110a is switched to a voltage setup optimized for [which was beforehand set up based on the property of the permeability T like drawing 7 in a voltage setup of the picture signal which the X driver circuit 110 supplies to the data line] the transparency mold display based on the lighting change over signal SL outputted from the lighting switching unit 107 at the time of lighting of a back light 15. It replaces with this or, in addition, scanning-line drive control circuit 100a is switched to a voltage setup optimized for [which was beforehand set up based on the property of the permeability T like drawing 7 in a voltage setup of the scan signal which the Y driver circuit 100 supplies to the scanning line] the transparency mold display based on the lighting change over signal SL outputted from the lighting switching unit 107 at the time of lighting of a back light 15. Since a voltage setup in the Y driver circuit 100 optimized a voltage setup in the X driver circuit 110 optimized for [these] the reflective mold display, a voltage setup in the Y driver circuit 100 optimized for the reflective mold display, a voltage setup in the X driver circuit 110 optimized for the transparency mold display, and for a transparency mold display is what becomes settled according to the class of liquid-crystal equipment, respectively, it is beforehand called for by experimental, theoretical, a simulation, etc. about each liquid-crystal equipment. And by voltage setup optimized, for example, hardware layout of the X driver circuit 110, data-line drive control circuit 110a, the Y driver circuit 100, and the scanning-line drive control circuit 110 is made so that an output of a picture signal and/or a scan signal may be possible, and a liquid crystal drive is performed by voltage setup optimized the object for a reflective mold display, or for the transparency mold display by simple switch actuation in these circuits.

[0079] As explained above, according to the 3rd operation gestalt, generally in the liquid crystal equipment of a transfective reflective mold, the property of the reflection factor R at the time of the reflective mold display to driver voltage, and the property of the permeability T at the time of a transparency mold display. In spite of being so-called difference, a high gradation display can be carried out to a reflective mold display and a transparency mold display at the maximum using the slope of each characteristic curve of the **** reflection factor R shown in drawing 7, and permeability T, contrast is raised and the thing of it can be carried out. Especially the thing for which the level of the liquid crystal applied voltage for giving a halftone indication of a white display and a black display is changed by a reflective mold display and transparency mold display is very useful.

[0080] According to this operation gestalt mentioned above, a reflective mold display and a transparency mold display without duplex projection or a blot of a display can be switched and displayed, and electrochromatic display equipment high-definition by high contrast can be especially realized also in any of a reflective mold display and a transparency mold display.

[0081] (The 4th operation gestalt) The 4th operation gestalt of the liquid crystal equipment concerning this invention is explained with reference to drawing 14 from drawing 11. The 4th operation gestalt is an operation gestalt of the TFD active-matrix-liquid-crystal equipment with which this invention is applied suitably.

[0082] First, the configuration in near the TFD driver element as an example of 2 terminal mold nonlinear device used for this operation gestalt is explained with reference to drawing 11 and drawing 12. It is the plan where drawing 11 shows a TFD driver element here typically with a pixel electrode etc., and drawing 12 is the B-B' cross section of drawing 11. In addition, in order to make each class and each part material into the magnitude of the degree which can be recognized on a drawing, contraction scales are made to have differed for each class or every each part material in drawing 12.

[0083] In drawing 11 and drawing 12, the TFD driver element 40 is formed on it by making into a substrate the insulator layer 41 formed on the transparence substrate 2, consists of the 1st metal membrane 42, an insulating layer 44, and the 2nd metal membrane 46 sequentially from an insulator layer 41 side, and has TFD structure (Thin Film Diode) or MIM structure (Metal Insulator Metal structure). And the 1st metal membrane 42 of the TFD driver element 40 is connected to the scanning line 61 formed on the transparence substrate 2, and the 2nd metal membrane 46 is connected to the pixel electrode 62 which consists of a conductive reflective film which are other examples of the 2nd electrode. In addition, it may replace with the scanning line 61, the data line (it mentions later) may be formed on the transparence

substrate 2, it may connect with the pixel electrode 62, and the scanning line 61 may be formed in an opposite substrate side.

[0084] The transparency substrate 2 consists of a substrate which has insulation, such as glass and plastics, and transparency. The insulator layer 41 which makes a substrate consists of tantalum oxide. However, an insulator layer 41 is formed in the 1st metal membrane 42 considering an impurity not being spread as a key objective from that the 1st metal membrane 42 does not exfoliate from a substrate by heat treatment performed after deposition of the 2nd metal membrane 46 etc., and a substrate. Therefore, when these exfoliations or diffusion of an impurity do not pose a problem by constituting the transparency substrate 2 from a substrate which was excellent in thermal resistance or purity like for example, the quartz substrate etc., an insulator layer 41 can be omitted. The 1st metal membrane 42 consists of a conductive metal thin film, for example, consists of a tantalum simple substance or a tantalum alloy. an insulator layer 44 — for example, formation — it consists of an oxide film formed in the surface of the 1st metal membrane 42 of anodic oxidation in liquid. The 2nd metal membrane 46 consists of a conductive metal thin film, for example, consists of a chromium simple substance or a chromium alloy.

[0085] The field which light, such as a slit of a rectangle or a square and a detailed opening, penetrates like each operation gestalt mentioned above is prepared, or the pixel electrode 62 is formed for every pixel smaller than the transparent electrode on an opposite substrate, and consists of especially these operation gestalten possible [transparency of light] through the gap. Moreover, the pixel electrode 62 may consist of single reflective films, and may consist of layered products of a reflecting layer and a transparent electrode layer.

[0086] Furthermore, the transparency insulator layer 29 is formed in the side (drawing Nakagami side surface) which faces the liquid crystal of the pixel electrode 62, the TFD driver element 40, and scanning-line 61 grade, and the orientation film 19 with which it consisted of organic thin films, such as a polyimide thin film, and predetermined orientation processing of rubbing processing etc. was performed is formed on it.

[0087] As mentioned above, although some examples of a TFD driver element were explained as a 2 terminal mold nonlinear device, 2 terminal mold nonlinear device which has bidirectional diode characteristics, such as a ZnO (zinc oxide) varistor, an MSI (Metal Semi-Insulator) driver element, and RD (Ring Diode), is applicable to the high-reflective-liquid-crystal equipment of this operation gestalt.

[0088] Next, the TFD driver element constituted like is explained above with reference to drawing 13 and drawing 14 about the configuration and actuation of the transfective high-reflective-liquid-crystal equipment of a TFD active-matrix drive method which are constituted by having and which are the 4th operation gestalt. It is the partial fracture perspective diagram in which drawing 13 is the representative circuit schematic having shown the liquid crystal device with the drive circuit, and drawing 14 shows a liquid crystal device typically here.

[0089] In drawing 13, the transfective high-reflective-liquid-crystal equipment of a TFD active-matrix drive method is connected to the Y driver circuit 100 where two or more scanning lines 61 arranged on the transparency substrate 2 constitute an example of the 1st supply means, and two or more data lines 60 arranged on the opposite substrate are connected to the X driver circuit 110 which constitutes an example of the 2nd supply means. In addition, the Y driver circuit 100 and the X driver circuit 110 may be formed the transparency substrate 2 or on that opposite substrate, and serve as drive circuit built-in transfective high-reflective-liquid-crystal equipment in this case. Or with transfective high-reflective-liquid-crystal equipment, it may consist of the independent exteriors IC, you may connect with the scanning line 61 or the data line 60 through predetermined wiring, and the Y driver circuit 100 and the X driver circuit 110 serve as transfective high-reflective-liquid-crystal equipment which does not include a drive circuit in this case.

[0090] In each matrix-like pixel field, the scanning line 60 is connected to one terminal of the TFD driver element 40 (refer to drawing 11 and drawing 12), and the data line 60 is connected to the other-end child of the TFD driver element 40 through the liquid crystal layer 3 and the pixel electrode 62. Therefore, if a scan signal is supplied to the scanning line 61 corresponding to each pixel field and a data signal is supplied

to the data line 60, the TFD driver element 40 in the pixel field concerned will be in an ON state, and driver voltage will be impressed to the liquid crystal layer 3 between the pixel electrode 62 and the data line 60 through the TFD driver element 40. And in a bright place, when the pixel electrode 62 reflects outdoor daylight, a reflective mold display is performed, and when opening of the pixel electrode 62 penetrates the light source light from a back light, a transparency mold display is performed in a dark place.

[0091] In drawing 14, transfective high-reflective-liquid-crystal equipment is equipped with the transparence substrate 2 and the transparence substrate (opposite substrate) 1 by which opposite arrangement is carried out at this. The transparence substrate 1 consists of a glass substrate. The pixel electrode 62 is formed in the transparence substrate 2 in the shape of a matrix, and each pixel electrode 62 is connected to the scanning line 61. It is extended in the direction which intersects the scanning line 61, and two or more data lines 60 as a transparent electrode arranged in the shape of a strip of paper are formed in the transparence substrate 1. The data line 60 consists of transparence conductivity thin films, such as for example, an ITO (Indium Tin Oxide) film. The orientation film 9 with which it consisted of organic thin films, such as a polyimide thin film, and predetermined orientation processing of rubbing processing etc. was performed is formed in the data-line 60 bottom. Furthermore, the non-illustrated color filter which becomes the transparence substrate 1 from the color-material film arranged the shape of the shape of a stripe and a mosaic, in the shape of a triangle, etc. according to the use is prepared.

[0092] As explained above, according to the transfective high-reflective-liquid-crystal equipment of the TFD active-matrix drive method of the 4th operation gestalt The electrochromatic display equipment which can switch and display a reflective mold display and a transparency mold display without duplex projection or a blot of a display is realizable. By switching a setup of the driver voltage to the gradation level of image data in the time of a reflective mold display and a transparency mold display, image display high-definition by high contrast can be performed also at the time of a transparency mold display also at the time of a reflective mold display. Transfective high-reflective-liquid-crystal equipment can be driven in NOMA reeve rack mode by the armature-voltage control in X and the Y driver circuits 110 and 100 which constitute especially an example of a driving means.

[0093] (The 5th operation gestalt) Next, the configuration and actuation in an operation gestalt of 1 concerning the driving gear which drives the liquid crystal equipment of the transfective reflective mold of the TFD active-matrix drive method mentioned above are explained with reference to drawing 19 from drawing 15 including the Y driver circuit 110 and the X driver circuit 110 which were shown in drawing 13. In addition, drawing 16 is the wave form chart of the 1st GCP signal and the 2nd GCP signal, drawing 15 is the block diagram showing the concrete configuration of a driving gear, and drawing 18 is [drawing 17 is the block diagram of the portion which drives the one data line in X driver circuit, and] a timing chart which shows the wave of various signals and the time relation to a driving gear. Drawing 19 is property drawing showing change of the ON width of face of the 1-pixel impression signal pulse of 1H to each gradation level throughout.

[0094] each of a 1st and 2nd supply means to supply the applied voltage which has the actual value of the magnitude according to the gradation level gradation data (indicative data) indicates a driving gear to be as shown in drawing 15 to a liquid crystal device (main part portion of the liquid crystal equipment except a drive circuit) -- an example -- it has the Y driver circuit 110 and the X driver circuit 110. A driving gear by switching a setup of each pulse width of the data signal over each gradation level in the X driver circuit 110 A setup of each magnitude of the actual value of the applied voltage to each gradation level is switched to a setup for a reflective mold display according to the astigmatism LGT of light source lamp 212a. And the driver control circuit 310 which constitutes an example of the 2nd control means switched to a setup for a transparency mold display according to lighting of light source lamp 212a, It has further the control power supply circuit 320 which supplies the control voltage of predetermined high potential, low voltage, and a reference potential to the Y driver circuit 100 and the X driver circuit 110, and the lighting control circuit 330 which controls lighting and the astigmatism LGT (putting out lights) of light source lamp 212b.

[0095] The driver control circuit 310 The 1st GCP generation circuit 311 which generates the 1st GCP (gray-scale control pulse) signal and the 2nd GCP signal used as the base of the Pulse Density Modulation

at the time of generating the data signal of the pulse width according to the gradation level in the X driver circuit 110 like the after-mentioned, respectively And the 2nd GCP generation circuit 312 and the data control circuit 313 which will change into the data signal of a predetermined format and will be outputted to the X driver circuit 110 if the gradation data of RGB is inputted, Various kinds of control signals, such as X clock signal, a Vertical Synchronizing signal, and a Horizontal Synchronizing signal, A timing signal etc. is inputted, and it has the LCD driving signal generation circuit 314 which generates the LCD driving signal which controls the generation timing of the 1st and 2nd GCP signal in the 1st and 2nd GCP generation circuits 311 and 312, and is constituted.

[0096] The 1st GCP generation circuit 311 generates the 1st GCP signal used as the criteria of a setup of the pulse width for an above-mentioned reflective mold display which consists of two or more pulses arranged corresponding to the unit of gradation level.

[0097] The 2nd GCP generation circuit 312 generates the 2nd GCP signal used as the criteria of a setup of the pulse width for an above-mentioned transparency mold display which consists of two or more pulses arranged corresponding to the unit of gradation level.

[0098] As shown in drawing 16 , the 1st and 2nd GCP signal has a mutually different pulse array, and the data signal supplied from the X driver circuit 110 based on the 1st GCP signal differs in the pulse width to the same gradation data from the data signal supplied from the X driver circuit 110 based on the 2nd GCP signal. The 1st and 2nd GCP signal consists of a total of N-2 pulses to the pulse corresponding to the pulse width of the data signal for displaying gradation level (N-1) from the pulse corresponding to the pulse width of the data signal for displaying gradation level (1), respectively in the case of the gradation data of N gradation, and it is arranged, respectively so that pulse separation may correspond to a unit of gradation level.

[0099] Such 1st and 2nd GCP generation circuits 311 and 312 consist of OR circuits which calculate two or more comparator circuits and the OR of these comparison results, and compare the voltage value of a LCD driving signal with two or more kinds of voltage values set to the object for a reflective mold display, or the transparency mold display based on the change width of face of the pulse width to a unit of each gradation level beforehand by these comparator circuits, respectively. And by calculating the OR of the comparison result of these comparator circuits, it is constituted so that the 1st and 2nd GCP signal as shown in drawing 16 which consists of a train of the pulse which is N-2 per one selection period from which a gap differs as the operation output corresponding to the change width of face of the pulse width according to a unit of each gradation level may be generated.

[0100] Again, in drawing 15 , the driver control circuit 310 is further equipped with the pulse signal switch 315 which supplies alternatively either of such 1st and 2nd GCP signals to the X driver circuit 110. And synchronizing with the lighting control using the lighting switch 331 by the lighting control circuit 330, the pulse signal switch 315 switches the pulse signal switch 315 so that the 2nd GCP signal may be supplied, while supplying the 1st GCP signal synchronizing with the astigmatism LGT (putting out lights) control using the lighting switch 331 by the lighting control circuit 330. In addition, lighting and astigmatism LGT control by the lighting control circuit 330 detect the manual switch actuation by the user, and outdoor daylight reinforcement, and are performed by the automatic-switch actuation based on the detection result. Then, the pulse signal switch 315 cuts and replaces synchronizing with control of this lighting and an astigmatism LGT. Therefore, according to the astigmatism LGT (putting out lights) of light source lamp 212a, and lighting, it can switch to a positive setup [be / no delay] for a reflective mold display, and a setup for a transparency mold display.

[0101] In addition, as shown in drawing 15 , you may constitute so that it may carry out based on the lighting control signal Smode sent to the lighting switch 331 from the lighting control circuit 330, but the switch actuation in such a pulse signal switch 315 may be constituted so that it may perform that light source lamp 212a was turned on or switched off based on the detecting signal from the detector to detect.

[0102] In drawing 15 the control power supply circuit 320 The X side power supply circuit 321 which supplies control voltage, such as voltage (VHX) of the high potential used for data signal generation of the X driver circuit 110, voltage (VLX) of low voltage, and voltage (VCX) of a reference potential, The Y driver

circuit 100 is equipped with the Y side power supply circuit 322 which supplies control voltage, such as voltage (VHY) of the high potential used for scan signal generation, voltage (VLY) of low voltage, and voltage (VCY) of a reference potential, and is constituted.

[0103] As shown in drawing 17, the indicative data of the format of the digital signal which consists of predetermined number bits which show one of 64 kinds of gradation level (gradation level 0-63), for example, such as 6 etc. bits, from the data control circuit 313 (refer to drawing 15) of the driver control circuit 310 is inputted into X driver circuit partial 110a which supplies a data signal to the one data line of the X driver circuit 110 about each pixel, respectively. Moreover, FR signal which are Horizontal Synchronizing signal HSYNC of an indicative data, the reference clock XCK for X driver circuit 110, the RES signal that is a pulse signal emitted for every selection period, and a binary signal which it is at the initiation [of one selection period] and termination time, and a voltage level reverses, respectively is inputted. Moreover, voltage VHX, VCX, and VLX is supplied from the control power supply circuit 330 (refer to drawing 15) as a power supply for data signal generation. Furthermore, especially with the gestalt of this operation, a GCP signal (the 1st or 2nd GCP signal) is supplied from the pulse signal switch 315 of the driver control circuit 310.

[0104] In drawing 17, X driver circuit partial 110a is equipped with a shift register 401, a latch circuit 402, the gray-scale control circuit 403, the GCP decoder circuit 404, the FR decoder circuit 405, the level-shifter circuit 406, and the LCD driver 408, and is constituted.

[0105] For every bit of a predetermined number, sequential maintenance will be carried out and X driver circuit partial 110a will go to a shift register 401, if an indicative data is inputted. The latch circuit 402 has the latch section corresponding to two or more data lines and one to one correspondences, and will be anew latched to this latch circuit 402 in the place where all the indicative datas for 1 level Rhine were held by performing the transfer to the shift register 401 of an indicative data one by one.

[0106] Here, the GCP decoder 404 generates a signal with the pulse width corresponding to the gradation level which each indicative data (digital value) of the predetermined number bit in a latch circuit 402 shows in response to control by the gray-scale control circuit 403 according to the GCP signal which consists of a train of the pulse of the predetermined number per one selection period.

[0107] The FR decoder 405 outputs a data signal with the wave which reversed the voltage polarity of the signal output of the GCP decoder circuit 404 for every selection period using FR signal which is a binary signal which changes a voltage level for every selection period. More specifically according to MSB of the latched indicative data (digital value), ON / off signal of each transistor which constitutes the LCD driver 408 about each selection period are generated. Thus, it is for carrying out the alternating current drive of the liquid crystal to make every selection period (1H period) reverse the voltage level of the data signal corresponding to ON, and ON/OFF state voltage of a scan signal are also reversed every 1H period.

[0108] Thus, ON / off signal of each transistor in the generated LCD driver 408 are shifted to the voltage level corresponding to each data line by the level-shifter circuit 406. And if the ON / off signal with which the voltage level was shifted are inputted into each gate, each transistor of the LCD driver circuit 408 will be turned on / turned off, respectively, and let the voltage value of each pulse be the voltage value specified with the combination of two or more voltage VHX, VCX, and VLX connected to each source or a drain.

[0109] All the digital signals for 1 level Rhine will be held by the X driver circuit 110 (refer to drawing 15) which comes to contain two or more X driver circuit partial 110a constituted as mentioned above, and two or more data lines 14 will be supplied at coincidence.

[0110] The above actuation is further explained with reference to the timing chart of drawing 18.

[0111] As shown in drawing 18, an RES signal is inputted into the X driver circuit 110 for every selection period, the GCP signal which becomes one selection period from the train of 62 pulses (=N-2 piece: in the case of 64 gradation) is inputted into it in parallel to this, and the indicative data (digital signal) which shows the gradation level 2, the gradation level 5, and the gradation level 0 about a specific pixel is further inputted into it per field. Then, based on a GCP signal, level of a data signal is set to ON by the GCP decoder 404 to the timing of the 2nd or the 5th pulse of those. And based on FR signal, the polarity of the

ON state voltage of a data signal or OFF state voltage is reversed by the FR decoder 405 for every selection period, and the data signal which takes further predetermined peak value is outputted.

[0112] Under the present circumstances, in the time rate that a data signal takes binary [in 1 selection period (1H period)], and the permeability of a liquid crystal panel, generally, linear relation does not become. For example, in the case of 64 gradation, each gradation level 0 (for example, black), 1, 2, ..., 63 (for example, white) obtained when changing the width of face which takes ON of 1 H term throughout, and the ON width of face concerned have relation as shown in the graph of drawing 19 with the property of liquid crystal, the property of a liquid crystal panel, etc. For this reason, the gradation display in the gestalt of this operation is changing the ON width of face of a data signal according to the gradation level which input data shows based on such relation. Namely, since the rate of change of ON width of face decreases and goes so that the gradation level 63 side is approached from the gradation level 0 side In order to control the difference of slighter ON width of face, as shown in the 2nd step from on drawing 16 or drawing 18 The GCP signal which consists of a train of the pulse of a "two gradation" individual (for example, the case of 64 gradation 62 pieces) is generated so that gaps may differ corresponding to the difference of the ON width of face of the data signal according to the difference of gradation level. That is, under relation like drawing 19 , the 1st and 2nd GCP signal which consists of a train of the pulse which is 62 pieces to which a gap becomes narrow gradually is generated in the 1st and 2nd GCP generation circuits 311 and 312, respectively as gradation level goes up.

[0113] Based on a GCP signal (the 1st or 2nd GCP signal) with such a property, as for a data signal, only the period from the 2nd pulse in a GCP signal to termination of the 1H period concerned is set to ON (for example, high-voltage level) among 1H corresponding periods to the gradation level 2 in drawing 18 . Next, as for a data signal, only the period from the 5th pulse in a GCP signal to termination of the 1H period concerned is set to ON (for example, low-battery level) among 1H corresponding periods to the gradation level 5. Moreover, a data signal is set to OFF (for example, high-voltage level) to the corresponding last of 1H period to the gradation level 0 next.

[0114] And as shown in the bottom of drawing 18 , only the period corresponding to the ON width of face of the data signal with which the impression signal (= scan signal-data signal) impressed to one pixel electrode (namely, pixel electrode connected between the one data line with which the indicative data of illustration is supplied, and scanning line (eye N line)) corresponds makes the TFD driver element concerned an ON state (low resistance condition) exceeding the threshold of a TFD driver element. Consequently, the effective voltage corresponding to the ON width of face of a data signal is applied to a part for the liquid crystal layer pinched by a pixel electrode and the data line concerned, or the scanning line.

[0115] Thus, the ON width of face of a data signal determines the permeability in each pixel of a liquid crystal panel, and the display corresponding to an indicative data is performed as the whole liquid crystal panel.

[0116] The above result, with the driving gear of the gestalt of this operation, a reflective mold display can be performed at the time of a light source lamp 212a astigmatism LGT, and a transparency mold display can be performed at the time of light source lamp 212a lighting.

[0117] Especially with the gestalt of this operation, a setup of each magnitude of the actual value of the applied voltage to each gradation level in the X driver circuit 110 is switched to a setup for a reflective mold display here according to the astigmatism LGT of light source lamp 212a by the pulse signal switch 315 (refer to drawing 15) of the driver control circuit 310, or it is switched to a setup for a transparency mold display according to lighting of light source lamp 212a.

[0118] Therefore, the relation which suited the property of permeability T over the driver voltage which showed the relation between gradation level and the reflection factor at the time of a reflective mold display to drawing 7 , Namely, a setup of each pulse width of a data signal [as opposed to / so that it may consider as the relation which makes the most of the slope of the characteristic curve of permeability T / each gradation level] If (the gap of each pulse over a unit of each gradation level in the 1st GCP signal shown in drawing 16 is specifically set up), the contrast at the time of a transparency mold display will be

raised efficiently. If each pulse width of the data signal over each gradation level sets as coincidence so that it may carry out to the relation which suited the property of a reflection factor R over the driver voltage shown in drawing 7, i.e., the relation which makes the most of the slope of the characteristic curve of a reflection factor R, (a setup of the gap of each pulse over a unit of each gradation level in the 1st GCP signal specifically shown in drawing 16), the contrast at the time of a reflective mold display will raise efficiently.

[0119] As explained above, according to the liquid crystal equipment of the 5th operation gestalt, neither the duplex projection by parallax nor a blot of a display occurs, but image display high-definition by high contrast becomes possible also at the time of a transparency mold display also at the time of a reflective mold display.

[0120] Moreover, since the comparatively easy switch actuation by the pulse signal switch 315 can perform [quickly and] a switch with a reflective mold display mode and a transparency mold display mode with the gestalt of this operation, it is convenient practically.

[0121] (The 6th operation gestalt) Next, the configuration and actuation in an operation gestalt of the others concerning the driving gear which drives the liquid crystal equipment of the transreflective reflective mold of the TFD active-matrix drive method mentioned above are explained with reference to drawing 21 from drawing 20 including the Y driver circuit 110 and the X driver circuit 110 which were shown in drawing 13. In addition, drawing 20 is the block diagram showing the concrete configuration of a driving gear, drawing 21 is the conceptual diagram showing the wave of two kinds of scan signals, and drawing 21 is property drawing of permeability (T) to the peak value (DC voltage) of a scan signal. In addition, in drawing 20, the reference mark same about the same component as the case of the 5th operation gestalt shown in drawing 15 is attached, and the explanation is omitted.

[0122] drawing 20 -- being shown -- as -- a driving gear -- the -- five -- operation -- a gestalt -- it can set -- the -- one -- and -- the -- two -- GCP -- generation -- a circuit -- 311 -- and -- 312 -- lists -- a pulse signal -- a switch -- 315 -- replacing with -- being single -- GCP -- generation -- a circuit -- 311 -- ' -- having had -- a driver -- a control circuit -- 310 -- ' -- having . the control power supply circuit [in / in a driving gear / the 5th operation gestalt] 320 -- replacing with -- the [the 1st and] -- the [the 2Y side power supply circuits 323 and 324 and / the 1st and] -- it has control power supply circuit 320' including the control voltage switch 325 which supplies alternatively the control voltage from the 2Y side power supply circuits 323 and 324 to the Y driver circuit 100. This control voltage switch 325 performs change over actuation based on the lighting control signal Smode supplied from the lighting control circuit 330. About other configurations, it is the same as that of the case of the 5th operation gestalt shown in drawing 15.

[0123] here -- especially -- control power supply circuit 320' -- an example of the 2nd control means -- constituting -- **** -- the -- the 1Y side power supply circuit 323 supplies the voltage (VHY1) of the high potential used as the criteria of a setup of the peak value of the scan signal for a reflective mold display, the voltage (VLY1) of low voltage, and the voltage (VCY1) of a reference potential as the 1st control voltage of a lot. the [on the other hand,] -- the 2Y side power supply circuit 324 supplies the voltage (VHY2) of the high potential which serves as criteria of a setup of the peak value of the scan signal for a transparency mold display as an example of the 2nd control voltage, the voltage (VLY2) of low voltage, and the voltage (VCY2) of a reference potential as the 2nd control voltage of a lot. And the control voltage switch 325 is constituted so that the 1st control voltage may be alternatively supplied to the Y driver circuit 100 according to the astigmatism LGT of light source lamp 212a and the 2nd control voltage may be alternatively supplied to the Y driver circuit 100 according to lighting of light source lamp 212a.

[0124] Therefore, with the 6th operation gestalt, the data signal which has the pulse width according to gradation level is supplied to the data line by the X driver circuit 110. In parallel to this, the scan signal which has the peak value corresponding to the 1st or 2nd control voltage by the Y driver circuit 100 while having predetermined width of face is supplied to the scanning line.

[0125] Drawing 21 is the wave form chart of an example of two kinds of scan signals generated in this way.

[0126] In drawing 21, only the latter peak value of ΔV is higher than the former peak value by the scan

signal (inside of drawing, left-hand side) set to the reflective mold display generated based on the 1st control voltage, and the scan signal (inside of drawing, right-hand side) set to the transparency mold display generated based on the 2nd control voltage. Therefore, in no MARI White mode, since only deltaV has the large voltage value of applied voltage, as for the brightness of a display, the direction at the time of driving with the scan signal at the time of a transparency mold display becomes dark. Namely, since only deltaV has the small voltage value of applied voltage, as for the brightness of a display, the direction at the time of driving with the scan signal at the time of a reflective mold display becomes bright.

[0127] Therefore, the relation which suited the property of permeability T over the driver voltage which showed the relation between gradation level and the reflection factor at the time of a reflective mold display to drawing 7, That is, if the 2nd control voltage to each gradation level is set up so that it may consider as the relation which makes the most of the slope of the characteristic curve of permeability T (specifically setup of the value of voltage VH2, VLY2, and VCH2), the contrast at the time of a transparency mold display will be raised efficiently. If the 1st control voltage to each gradation level is set as coincidence so that it may carry out to the relation which suited the property of a reflection factor R over the driver voltage shown in drawing 7, i.e., the relation which makes the most of the slope of the characteristic curve of a reflection factor R, (specifically setup of the value of voltage VH1, VLY1, and VCH1), the contrast at the time of a reflective mold display will be raised efficiently.

[0128] As explained above, according to the liquid crystal equipment of the 6th operation gestalt, neither the duplex projection by parallax nor a blot of a display occurs, but image display high-definition by high contrast becomes possible also at the time of a transparency mold display also at the time of a reflective mold display. In addition, it asks [value / of the voltage VH1, VLY1, VC1, VH2 VLY2, and VC2 which constitutes the 1st and 2nd concrete control voltage / each] by experimental, theoretical, a simulation, etc. beforehand about liquid crystal equipment. Moreover, although the voltage VH1 (VH2) of high potential, the voltage VLY1 (VLY2) of low voltage, and the voltage VC1 (VC2) of a reference potential are required to adopt the drive method which reverses applied voltage for every selection period As shown in drawing 21, as long as peak value is switched, two of three voltage are good also as one or the same potential between the 1st control voltage and the 2nd control voltage. That is, not three but two or one are sufficient as the voltage actually switched with a switch. Moreover, if an above-mentioned reversal drive is not carried out, the 1st and 2nd control voltage may consist of voltage of a pair, respectively.

[0129] Since the comparatively easy switch actuation by the control voltage switch 325 can perform [quickly and] a switch with a reflective mold display mode and a transparency mold display mode especially with the gestalt of this operation, it is convenient practically.

[0130] Although it was made to perform gradation control by making equivalent to gradation level quantity of electricity specified with the width of face and peak value of a pulse which make a data signal based on the so-called "4 Value driving method", and becoming irregular with the above 5th and 6th operation gestalt, according to this invention, it is also possible to perform such gradation control based on the charge-and-discharge driving method indicated by JP,2-125225,A etc., for example.

[0131] (The 7th operation gestalt) The 7th operation gestalt of the liquid crystal equipment concerning this invention is explained with reference to drawing 24 from drawing 22. The 7th operation gestalt is an operation gestalt of the TFT active-matrix-liquid-crystal equipment with which this invention is applied suitably. Drawing 22 is equal circuits, such as various elements in two or more pixels formed in the shape of [which constitutes the image display field of liquid crystal equipment] a matrix, and wiring, drawing 23 is a plan of two or more pixel groups where the transparency substrate with which the data line, the scanning line, a pixel electrode, etc. were formed adjoins each other, and drawing 24 is the C-C' cross section of drawing 23. In addition, in order to make each class and each part material into the magnitude of the degree which can be recognized on a drawing, contraction scales are made to have differed for each class or every each part material in drawing 24.

[0132] In drawing 22, two or more formation is carried out at the shape of a matrix, and TFT130 for controlling the pixel electrode 62 which are other examples of the 2nd electrode arranged in the shape of a matrix by the transfective high-reflective-liquid-crystal equipment of the TFT active matrix of the 7th

in the location contiguous to each pixel electrode 62 at the transparency substrate 2.

[0139] Thus, it is constituted, and among the transparency substrates 1 and 2 of the pair arranged so that the pixel electrode 62 and a counterelectrode 121 may meet, liquid crystal is enclosed with the space surrounded by the sealant like the case of the 1st operation gestalt, and the liquid crystal layer 3 is formed.

[0140] Furthermore, the 1st interlayer insulation film 112 is formed in the bottom of two or more TFT30 for pixel switching. The 1st interlayer insulation film 112 functions as a substrate film for TFT30 for pixel switching by being formed all over the transparency substrate 2. The 1st interlayer insulation film 112 consists of high insulation glass, such as NSG (non doped silicate glass), PSG (phosphorus silicate glass), BSG (boron silicate glass), and BPSG (boron phosphorus silicate glass), or a silicon oxide film, a silicon nitride film, etc.

[0141] In drawing 24, TFT130 for pixel switching is constituted including the drain field connected to the pixel electrode 62 through the source field connected to the data line 135 through the contact hole 85, channel field by which opposite arrangement was carried out through gate insulator layer at the scanning line 131 81a', and a contact hole 88. the data line 131 — low [, such as aluminum,] — it consists of protection-from-light nature and conductive thin films, such as metal membrane metallurgy group silicide [****]. [, such as an alloy film,] Moreover, on it, the 2nd interlayer insulation film 114 with which contact holes 85 and 88 were punctured is formed, and the 3rd interlayer insulation film 117 with which the contact hole 88 was punctured is further formed on it. It consists of high insulation glass, such as NSG, PSG, BSG, and BPSG, or a silicon oxide film, a silicon nitride film as well as the 1st interlayer insulation film 112, etc. also about these 2nd and 3rd interlayer insulation films 114 and 117.

[0142] TFT130 for pixel switching may be TFT of which structures, such as LDD structure, offset structure, and self aryne structure. Furthermore, TFT130 may be constituted above others, the dual gate, or the triple gate. [structure / single gate]

[0143] Although the scanning line 131 drives the liquid crystal equipment of the transfective reflective mold of the TFT active-matrix drive method of the 7th operation gestalt constituted like the above by X driver circuit and the data line 135 drives by Y driver circuit under the present circumstances, the liquid crystal driver voltage impressed to the liquid crystal layer 3 in the time of lighting of a lighting system, and an astigmatism LGT through a counterelectrode 121 and the pixel electrode 62 (refer to drawing 24) — the same image — receiving — difference — these counterelectrodes 121 and the pixel electrode 62 drive like. Namely, by switching one [at least] voltage setup according to lighting and the astigmatism LGT of a lighting system in a drive circuit among the scan signals supplied to the picture signal supplied to the data line 135, and the scanning line 131 It becomes possible to drive the liquid crystal layer 3 by the driver voltage which suited the reflection factor property over the driver voltage in the transparency mold display concerned at the time of a transparency mold display, driving the liquid crystal layer 3 by the driver voltage which suited the reflection factor property over the driver voltage in the reflective mold display concerned at the time of a reflective mold display. In this case, it is possible it not only to raise contrast with the time of a reflective mold display and a transparency mold display, but for it to be made to perform a gamma correction to coincidence further.

[0144] As explained above, according to the transfective high-reflective-liquid-crystal equipment of the TFT active-matrix drive method of the 7th operation gestalt, between the pixel electrode 62 and a counterelectrode 121 It becomes controllable about the orientation condition of each liquid crystal portion by carrying out sequential impression of the electric field at the liquid crystal portion in each pixel electrode 62. In a bright place, when the pixel electrode 62 reflects outdoor daylight, a reflective mold display is performed, and when opening of the pixel electrode 62 penetrates the light source light from a back light, a transparency mold display is performed in a dark place. Consequently, the electrochromatic display equipment which can switch and display a reflective mold display and a transparency mold display without duplex projection or a blot of a display can be realized, and image display high-definition by high contrast can be performed also at the time of a transparency mold display also at the time of a reflective mold display.

[0145] In order to supply power to each pixel electrode 62 through TFT130 especially, the cross talk

between the pixel electrodes 62 can be reduced, and more nearly high-definition image display becomes possible.

[0146] In addition, you may drive by horizontal electric field parallel to the substrate between the pixel electrodes 62 on the transparence substrate 2, without preparing a counterelectrode on the transparence substrate 1.

[0147] Here, the coloring layer of the color filter 5 used for the 1st to 7th [which was explained above] operation gestalt is explained with reference to drawing 25 . Drawing 25 is property drawing showing the permeability of each coloring layer of a color filter 5. In each operation gestalt, once incident light penetrates one coloring layer of the color filters 5, the liquid crystal layer 3 is passed and it is reflected by reflector 7 grade, and when performing a reflective mold display, after penetrating a coloring layer again, it is emitted. Therefore, since two-times passage of the color filter will be carried out unlike the liquid crystal equipment of the usual transparency mold, in the usual color filter, a display becomes dark and contrast falls. So, with each operation gestalt, as shown in drawing 25 ; it light-color-izes and forms so that the minimum permeability 61 in the visible region of each coloring layer of R, G, and B of a color filter 5 may become 25 - 50%. Light color-ization of a coloring layer is made by making thickness of a coloring layer thin or making low concentration of the pigment mixed in a coloring layer, or a color. By this, when performing a reflective mold display, it can constitute so that brightness of a display may not be reduced.

[0148] In performing a transparency mold display, in order to penetrate a color filter 5 only once, light color-ization of a display is brought about, but since many light of a back light is interrupted with a reflector with each operation gestalt in many cases, light-color-izing of this color filter 5 is convenient rather, when securing the brightness of a display.

[0149] (The 8th operation gestalt) The 8th operation gestalt of this invention is explained with reference to drawing 26 . The 8th operation gestalt is an operation gestalt of electronic equipment equipped with any one of the 1st to 7th [which was explained above] operation gestalten. That is, the 8th operation gestalt is involved in the various electronic equipment suitably used as a display of the pocket device by which the liquid crystal equipment shown in the 1st to 7th operation gestalt mentioned above is needed for a low power under various environment. Three examples of the electronic equipment of this invention are shown in drawing 26 .

[0150] Drawing 26 (a) shows a cellular phone and a display 72 is formed in the front upper part section of a main part 71. A cellular phone is used in all environment regardless of the inside-of-a-house outdoors. Although used especially in an automobile in many cases, in the car [of Nighttime] is very dark. Therefore, the display used for a cellular phone has desirable transfective high-reflective-liquid-crystal equipment to which the reflective mold display with low power consumption is made as for the transparency mold display which used the fill-in flash for Maine if needed. If the liquid crystal equipment of a publication is used for the above-mentioned 1st operation gestalt thru/or the above-mentioned 7th operation gestalt as a display 72 of a cellular phone, the transparency mold display of a reflective mold display will also be brighter than before, and a gestalt telephone with a high contrast ratio will be obtained.

[0151] Drawing 26 (b) shows a watch and a display 74 is formed in the center 73 of a main part. The important viewpoint in a watch use is a high-class feeling. If the liquid crystal of a publication is used for the 1st operation gestalt thru/or the 14th operation gestalt of this invention as a display 74 of a watch, since there is little property change by the wavelength of light, coloring is also small as well as contrast being brightly high. Therefore, as compared with the conventional watch, the color display which occurs a high-class feeling very is obtained.

[0152] Drawing 26 (c) shows a portable information device, a display 76 is formed in the main part 75 bottom, and the input section 77 is formed in the bottom. Moreover, a touch key is prepared in the front face of a display 76 in many cases. Since the usual touch key has much surface reflection, a display is hard to look at it. Therefore, also although it is conventionally called a pocket mold, transparency mold liquid crystal equipment is used as a display in many cases. However, for transparency mold liquid crystal equipment, in order to always use a back light, power consumption is large, and a battery life is a short paddle. Also in this case, if the liquid crystal equipment of the above-mentioned 1st operation gestalt

thru/or the 7th operation gestalt is used as a display 76 of a portable information device, a portable information device bright a display and skillful in it can be obtained also with a reflective mold, a transreflective reflective mold, or a transparency mold.

[0153] The liquid crystal equipment of this invention is not restricted to each operation gestalt mentioned above, and can be suitably changed in the range which is not contrary to the summary or thought of invention which can be read in a claim and the whole specification, and the liquid crystal equipment accompanied by such modification is also contained in the technical range of this invention.

[Translation done.]

*** NOTICES ***

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. **** shows the word which can not be translated.
3. In the drawings, any words are not translated.

DESCRIPTION OF DRAWINGS

[Brief Description of the Drawings]

[Drawing 1] It is the outline drawing of longitudinal section (drawing 1 (a)) and outline plan (drawing 1 (b)) showing the outline structure of the 1st operation gestalt of the liquid crystal equipment concerning this invention.

[Drawing 2] It is the plan showing one example of opening in the 1st operation gestalt.

[Drawing 3] It is the plan showing other examples of opening in the 1st operation gestalt.

[Drawing 4] It is the plan showing other examples of opening in the 1st operation gestalt.

[Drawing 5] It is the plan showing other examples of opening in the 1st operation gestalt.

[Drawing 6] It is the plan showing other examples of opening in the 1st operation gestalt.

[Drawing 7] It is property drawing showing the property of the reflection factor R at the time of the reflective mold display to the driver voltage in the liquid crystal equipment of the 1st operation gestalt, and the property of the permeability T at the time of a transparency mold display.

[Drawing 8] It is the outline drawing of longitudinal section showing the outline structure of the 2nd operation gestalt of the liquid crystal equipment concerning this invention.

[Drawing 9] It is the outline length plan showing the outline structure of the pixel electrode in the 2nd operation gestalt.

[Drawing 10] It is the block diagram of the liquid crystal equipment in the 3rd operation gestalt of the liquid crystal equipment concerning this invention.

[Drawing 11] It is the plan showing typically the TFD driver element of the 4th operation gestalt concerning the liquid crystal equipment of this invention with a pixel electrode etc.

[Drawing 12] It is the B-B' cross section of drawing 11 .

[Drawing 13] It is the representative circuit schematic having shown the liquid crystal device in the 4th operation gestalt with the drive circuit.

[Drawing 14] It is the partial fracture perspective diagram showing typically the liquid crystal device in the 4th operation gestalt.

[Drawing 15] It is the block diagram of the liquid crystal panel in the 5th operation gestalt concerning the liquid crystal equipment of this invention.

[Drawing 16] It is the wave form chart of the 1st and 2nd GCP signal generated in the 5th operation gestalt.

[Drawing 17] They are some block diagrams of X driver circuit included in the driving gear with which the 5th operation gestalt was equipped.

[Drawing 18] It is the timing chart which shows actuation of the driving gear with which the 5th operation gestalt was equipped.

[Drawing 19] It is property drawing showing the change of the ON width of face of the pulse for the data signal drive of 1H to gradation level throughout in the 5th operation gestalt.

[Drawing 20] It is the block diagram of the liquid crystal equipment which consists of the liquid crystal panel and driving gear in the 6th operation gestalt concerning this invention.

[Drawing 21] It is the wave form chart of two kinds of scan signals generated in the 6th operation gestalt.

[Drawing 22] They are equal circuits, such as various elements in two or more pixels formed in the shape of [which constitutes the image display field of the liquid crystal equipment of the 7th operation gestalt concerning this invention] a matrix, and wiring.

[Drawing 23] It is the plan of two or more pixel groups where the transparence substrate with which the data line in the 7th operation gestalt, the scanning line, a pixel electrode, etc. were formed adjoins each other.

[Drawing 24] It is the C-C' cross section of drawing 23 .

[Drawing 25] It is the graph which shows the light transmittance for every coloring layer of the color filter in the 1st to 7th operation gestalt.

[Drawing 26] It is the outline perspective diagram of various kinds of electronic equipment of the 8th operation gestalt concerning this invention.

[Translation done.]

operation gestalt is connected in the source of TFT130 electrically [the data line 135 with which a picture signal is supplied]. The picture signals S1, S2, —, Sn written in the data line 135 may be supplied to line sequential, and you may make it supply them to this order for every group to two or more data-line 135 comrades which adjoin each other. Moreover, the scanning line 131 is electrically connected to the gate of TFT130, and it consists of predetermined timing so that the scan signals G1, G2, —, Gm may be impressed to the scanning line 131 in pulse line sequential at this order. It connects with the drain of TFT130 electrically, and the pixel electrode 62 writes in the picture signals S1, S2, —, Sn supplied from the data line 135 in TFT130 which is a switching element when only a fixed period closes the switch to predetermined timing. Fixed period maintenance of the picture signals S1, S2, —, Sn of the predetermined level written in liquid crystal through the pixel electrode 62 is carried out between the counterelectrodes (it mentions later) formed in the opposite substrate (it mentions later). Here, in order to prevent the held picture signal leaking, storage capacitance 170 is added to the liquid crystal capacity and juxtaposition which are formed between the pixel electrode 62 and a counterelectrode.

[0133] In drawing 23, on the transparence substrate 2 as a TFT array substrate, the pixel electrode 62 (the outline 62a is shown by the drawing middle point line) which consists matrix-like of a reflective film is formed, and the data line 135, the scanning line 131, and the capacity line 132 are formed respectively along the boundary of the pixel electrode 62 in every direction. Electrical installation of the data line 135 is carried out to the source field among semiconductor layer 81a which consists of a polish recon film etc. through a contact hole 85. Electrical installation of the pixel electrode 62 is carried out to the drain field among semiconductor layer 81a through the contact hole 88. The capacity line 132 is carrying out opposite arrangement at the 1st storage capacitance electrode installed from the drain field of the semiconductor layer 1a through the insulator layer, and constitutes storage capacitance 170. Moreover, the scanning line 131 is arranged so that channel field 81a' shown in the slash field of the upward slant to the right in drawing among semiconductor layer 81a may be countered, and the scanning line 131 functions as a gate electrode. Thus, TFT130 by which opposite arrangement of the scanning line 131 was carried out as a gate electrode is formed in the crossing part of the scanning line 131 and the data line 135 at channel field 81a', respectively.

[0134] As shown in drawing 24, liquid crystal equipment is equipped with the transparence substrate 2 and the transparence substrate (opposite substrate) 1 by which opposite arrangement is carried out at this. These transparence substrates 1 and 2 consist of a substrate which has insulation, such as a quartz, glass, and plastics, and transparency, respectively.

[0135] The field which light, such as a slit of a rectangle or a square and a detailed opening, penetrates like each operation gestalt mentioned above is prepared, or the pixel electrode 62 is formed for every pixel smaller than the transparent electrode on an opposite substrate, and consists of especially these operation gestalten possible [transparency of light] through the gap. Moreover, the pixel electrode 62 may consist of single reflective films, and may consist of layered products of a reflecting layer and a transparent electrode layer.

[0136] Furthermore, the transparence insulator layer 29 is formed in the side (drawing Nakagami side surface) which faces the liquid crystal of the pixel electrode 62 and TFT130 grade, and the orientation film 19 with which it consisted of organic thin films, such as a polyimide thin film, and predetermined orientation processing of rubbing processing etc. was performed is formed on it.

[0137] On the other hand, the 2nd protection-from-light film 122 called a black mask or the Black matrix is formed in the non-[which the counterelectrode 121 as other examples of a transparent electrode is mostly formed in the whole surface, and is each pixel] opening field at the transparence substrate 1. The orientation film 9 with which it consisted of organic thin films, such as a polyimide thin film, and predetermined orientation processing of rubbing processing etc. was performed is formed in the counterelectrode 121 bottom. Furthermore, the non-illustrated color filter which becomes the transparence substrate 1 from the color-material film arranged the shape of the shape of a stripe and a mosaic, in the shape of a triangle, etc. according to the use prepares, and it is ****.

[0138] TFT130 for pixel switching which carries out switching control of each pixel electrode 62 is formed